


Communication & Low Voltage

Communication & Low Voltage

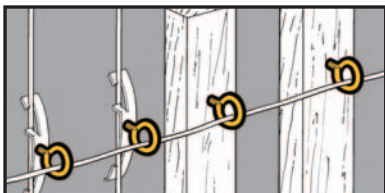

- Supports low voltage communication cables from beams or rods when used with other fasteners.
- *Ultimate Static Load Capacity:* 50 Lbs.
- Finish: Zinc Plated

Threaded Bridle Rings



UPC/Part Number	Catalog Number	Ring Size	Thread Size x Thread Length	Box Qty.
781011 19550	BR-8-T	1/2"	#10-24 x 9/16"	100
781011 19555	BR-12-T	3/4"	#10-24 x 9/16"	100
781011 19560	BR-20-T	1 1/4"	#10-24 x 9/16"	100
781011 19570	BR-32-T	2"	#10-24 x 9/16"	100
781011 19565	BR-20-4T	1 1/4"	1/4"-20 x 9/16"	100
781011 19575	BR-32-4T	2"	1/4"-20 x 9/16"	100
781011 19889	BR-64-4T	4"	1/4"-20 x 9/16"	50



Lag Screw
for Wood
Beams




UPC/Part Number	Catalog Number	Ring Size	Thread Size x Thread Length	Box Qty.
781011 19875	BR-16-3W	1"	9/16" x 9/16"	100
781011 19886	BR-24-4W	1 1/2"	1/4" x 27/32"	100
781011 19876	BR-32-4W	2"	1/4" x 7/8"	100

Read safety/installation instruction sheets in packages before use.



Communication & Low Voltage

- The convenience of a bridler ring with the cable-bearing surface of a hook.
- 2" saddle is available separately. Can be easily attached before or after cable installation.

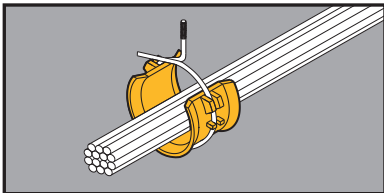

Communication & Low Voltage

Bridler Ring Saddles



BRS-32A


BRS-64A

BRS-32




UPC/Part Number	Catalog Number	Thread Size x Thread Length/Description	Box Qty.
7820511 22761	BRS-32A	1/4"-20 x 7/8" 2" Ring Assembly.	50
7820511 22762	BRS-64A	1/4"-20 x 1" 4" Ring Assembly.	50
7820511 22759	BRS-32	2" Saddle Only	50


Also available for use with the following B-Line Fasteners.




BU-9-12




BC1




BW2



BC442



BH4-F3




BA5-4T

Read safety/installation instruction sheets in packages before use.

Communication & Low Voltage

Communication & Low Voltage

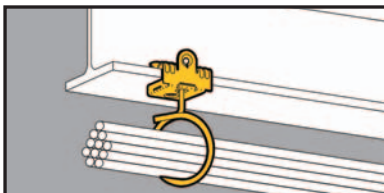


- Supports low voltage communication cables from beam flanges 1/8" to 3/4" thick.
- Pre-assembled with 2" bridle ring.
- Reduces installation time.
- Static Load Capacity : 15 lbs.

Bridle Ring/Beam Fastener Assy.



UPC/Part Number	Catalog Number	Description	Box Qty.
781011 02921	BR-32-4T-U-2-4	1/8" to 1/4"	50
781011 02923	BR-32-4T-U-5-8	5/16" to 1/2"	50
781011 02924	BR-32-4T-U-9-12	9/16" to 3/4"	50

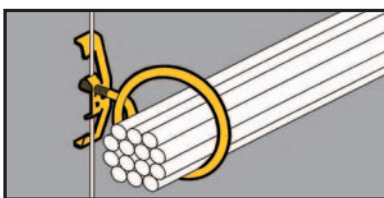

- Supports low voltage communication cables from drop wire.
- Pre-assembled with 2" bridle ring.
- Reduces installation time.
- Static Load Capacity : 15 lbs.

Bridle Ring/Rod & Wire Fastener Assy.




UPC/Part Number	Catalog Number	Description	Box Qty.
781011 02929	BR-32-4T-W2	#12 Wire Thru 1/4" Plain or Threaded Rod	50

Read safety/installation instruction sheets in packages before use.



Communication & Low Voltage

- Supports low voltage communication cables above the T-Bar.
- Pre-assembled with 2" bridler ring.
- Reduces installation time.
- For positioning only - No Load Rating

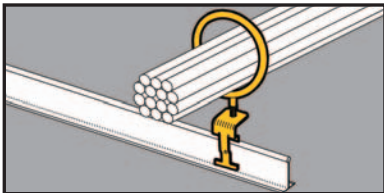


Communication & Low Voltage

Bridle Ring/T-Bar Fastener Assembly



UPC/Part Number	Catalog Number	Description	Box Qty.
781011 02934	BR-32-4T-A6	2" Ring Size	50

- Supports low voltage communication cables from beam flanges thru 1/2" thick.
- Pre-assembled with 2" bridler ring.
- Reduces installation time.
- Static Load Capacity: 15 lbs.

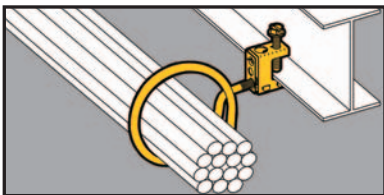

Bridle Ring/Beam Fastener Assembly



UPC/Part Number	Catalog Number	Description	Box Qty.
781011 02937	BR-32-4T-C1	2" Ring Size	50

Read safety/installation instruction sheets in packages before use.