



Cable To ATR Fasteners

- .505" diameter hole designed to support cable from 3/8" or 1/2" threaded rod
- Allows back-to-back and multi-tier installations
- Qwik-Latch™ cable retainers included (not shown on drawings)
- Designed to accept cable ties
- Static Load Capacity: 30 Lbs. (13.6kg)

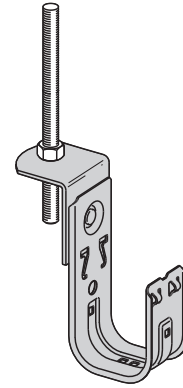

Note: Part numbers listed are for galvanized hooks - Add "SS4" for Stainless Steel.



Part Number	Hook Size		Wt. Per 100	
	In.	(mm)	Lbs.	(kg)
BCH21-AB *	1 ⁵ / ₁₆ "	(33.3)	34.2	(15.5)
BCH32-AB *	2"	(50.8)	40.0	(18.1)
BCH64-AB *	4"	(101.6)	91.2	(41.3)

* For Xylan® coating, add "X" after cable hook part number. Ex: BCH32X-AB

Popular Bee List item

Angle Bracket Cable Fasteners

- Designed for direct attachment to structures
- Supports cable from 1/4" threaded rod
- .265" diameter hole accepts anchors, screws or common nails
- Qwik-Latch™ cable retainers included (not shown on drawings)
- Designed to accept cable ties
- Static Load Capacity: 30 Lbs. (13.6kg)

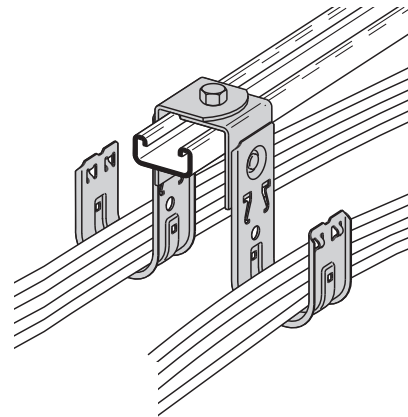

Note: Part numbers listed are for galvanized hooks - Add "SS4" for Stainless Steel.

Part Number	Hook Size		Wt. Per 100	
	In.	(mm)	Lbs.	(kg)
BCH12-RB	3/4"	(19.0)	29.0	(13.2)
BCH21-RB *	1 ⁵ / ₁₆ "	(33.3)	34.4	(15.6)
BCH32-RB *	2"	(50.8)	39.4	(17.9)
BCH64-RB *	4"	(101.6)	91.2	(41.3)

* For Xylan® coating, add "X" after cable hook part number. Ex: BCH32X-RB

Popular Bee List item