



High/Low Density Cable Managers

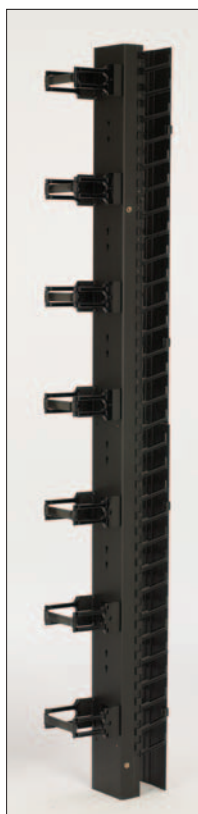

Sloped Fingers & Captive Mounting Nuts

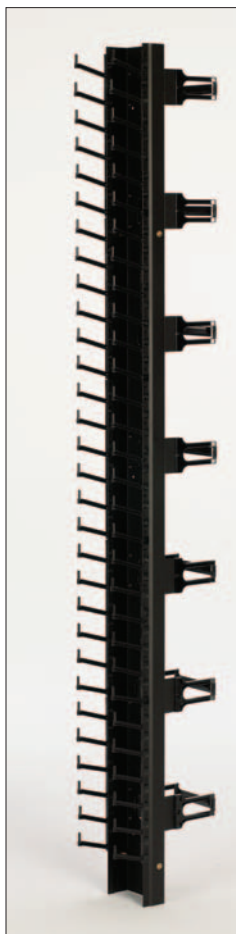

Mounting Hardware

- Sloped fingers at 1.5U provide additional cable support and enhance cable retention
- Captive hardware for faster installation onto equipment rack
- Popular high/low density configuration accomodates most cabling installations
- Designed for fast, easy installation by one person
- Dual-hinged door provides cable access from front side
- Multiple cable pass-through openings with cable tie lances provide flexibility
- Finish: Flat Black Powder Coat (FB)

Catalog Number	Height		Cable Manager Width		Single/Double Sided	Weight Each	
	in.	mm	in.	mm		lbs.	kg
SB86566D	84"	2134	6"	152	Double	27.5	12.5
SB86568D	84"	2134	8"	203	Double	32.0	14.5
SB865610D	84"	2134	10"	254	Double	36.0	16.3