


B446B SWIVEL HANGER (MALE ONLY)


- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN

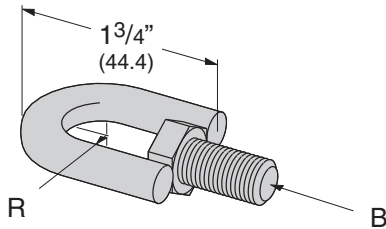

Part No.	B	R	Wt./C	
			Lbs.	kg
B446B- ³ / ₈	³ / ₈ "-16 HHCS	⁹ / ₃₂ " (7.1)	16	(7.2)
B446B- ¹ / ₂	¹ / ₂ "-13 HHCS	³ / ₈ " (9.5)	20	(9.1)
B446B- ⁵ / ₈	⁵ / ₈ "-11 HHCS	¹⁵ / ₃₂ " (11.9)	42	(19.0)
B446B- ³ / ₄	³ / ₄ "-10 HHCS	⁹ / ₁₆ " (14.3)	60	(27.2)

B446A SWIVEL HANGER (FEMALE ONLY)


- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN



Part No.	A	R	Wt./C	
			Lbs.	kg
B446A- ³ / ₈	³ / ₈ "-16 HN	⁹ / ₃₂ " (7.1)	13	(5.9)
B446A- ¹ / ₂	¹ / ₂ "-13 HN	³ / ₈ " (9.5)	15	(6.8)
B446A- ⁵ / ₈	⁵ / ₈ "-11 HN	¹⁵ / ₃₂ " (11.9)	34	(15.4)
B446A- ³ / ₄	³ / ₄ "-10 HN	⁹ / ₁₆ " (14.3)	45	(20.4)

B446 SWIVEL HANGER (FEMALE-MALE)


- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN

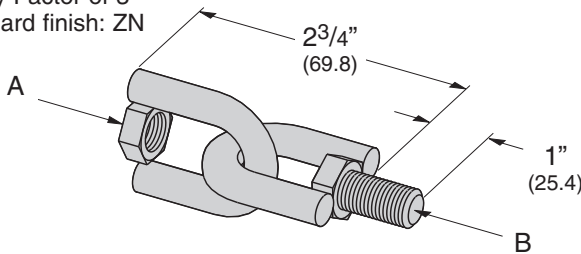

Part No.	A	B	Wt./C	
			Lbs.	kg
B446- ³ / ₈	³ / ₈ "-16 HN	³ / ₈ "-16 HHCS	28	(12.7)
B446- ¹ / ₂	¹ / ₂ "-13 HN	¹ / ₂ "-13 HHCS	36	(16.3)
B446- ⁵ / ₈	⁵ / ₈ "-11 HN	⁵ / ₈ "-11 HHCS	78	(35.4)
B446- ³ / ₄	³ / ₄ "-10 HN	³ / ₄ "-10 HHCS	112	(50.8)

B446C SWIVEL HANGER (FEMALE-FEMALE)


- Design Load:
 - (³/₈)-610 Lbs. (2.71 kN)
 - (¹/₂)-1130 Lbs. (5.02 kN)
 - (⁵/₈)-1810 Lbs. (8.05 kN)
 - (³/₄)-2710 Lbs. (12.05 kN)
- Safety Factor of 3
- Standard finish: ZN

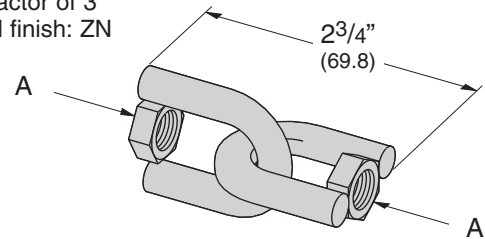

Part No.	A	Wt./C	
		Lbs.	kg
B446C- ³ / ₈	³ / ₈ "-16 HN	26	(11.8)
B446C- ¹ / ₂	¹ / ₂ "-13 HN	31	(14.0)
B446C- ⁵ / ₈	⁵ / ₈ "-11 HN	68	(30.8)
B446C- ³ / ₄	³ / ₄ "-10 HN	90	(40.8)


B590 FIBER WIRE RETAINER

- Installation aid for retaining wires before installing snap closure strip
- Wt./C 1 Lb. (.4 kg)



B617 SHOULDER BOLT

- Standard finish: ZN
- Wt./C 6 Lbs. (2.7 kg)



³/₈"-16 Thread Size

Reference page 162 for general fitting and standard finish specifications. U.L. Wire Fill Chart on pages 230 - 231.