


Beam Clamps

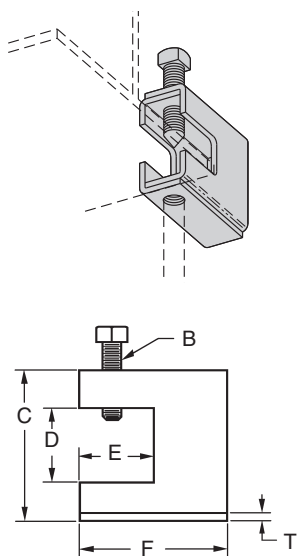

Cat. No.	Rod Size	B	C		D	
			in.	(mm)	in.	(mm)
● B307	1/2"-13	1/2"-13	27/16"	(61.9)	7/8"	(22.2)
● B308	1/2"-13	1/2"-13	29/16"	(65.1)	7/8"	(22.2)
● B321-2	1/2"-13	1/2"-13	39/16"	(90.5)	1 11/16"	(42.8)


Cat. No.	E		F		T		Design Load	
	in.	(mm)	in.	(mm)	in.	(mm)	lbs.	(kN)
● B307	1 1/8"	(28.6)	2 1/2"	(63.5)	7Ga.	(4.5)	1100	(4.89)
● B308	1 1/8"	(28.6)	2 1/2"	(63.5)	1/4"	(6.3)	1500	(7.11)
● B321-2	1 5/8"	(41.3)	3 1/4"	(82.5)	1/4"	(6.3)	1400	(6.23)

- Design Load Safety Factor = 5
- Setscrew included

Anchor Strap

Cat. No.	Flange Width	
	in.	(mm)
● B312-6	Up to 6"	(Up to 152.4)
● B312-9	6"-9"	(152.4-228.6)
● B312-12	9"-12"	(228.6-304.8)


Used with B307, B308 and B321-2 beam clamps

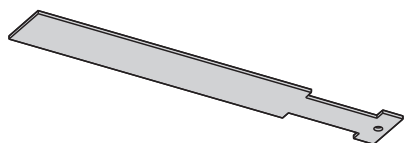

Beam Clamp

Part Number	Design Load*		Max. Flange Thick		Mat'l Thickness	
	lbs	(kN)	in.	(mm)	in.	(mm)
● B212-3/8	1000	(4.45)	1 1/8"	(28.6)	3/8"	(9.5)

*when used in pairs




- Design Load Safety Factor = 5
- Sold in pieces
- Setscrew included

Beam Clamp

Cat. No.	Design Load*		'A' Dimension	
	lbs	(kN)	in.	(mm)
● B441-22	1200	(15.34)	3 3/8"	(85.7)
● B441-22A	1200	(15.34)	5"	(127.0)
● B441Z-22	N/A	(N/A)	3 3/8"	(85.7)

*when used in pairs


- Design Load Safety Factor = 5
- Sold in pieces



Beam Clamps

Cat. No.
● B355

- Design Load 1200 lbs (5.34kN) when used in pairs
- Design Load Safety Factor = 5
- Sold in pieces
- Order HHCS & channel nuts separately

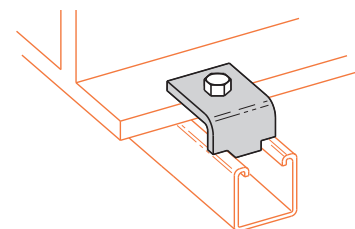

● Green = Fastest shipped items ● Black = Normal lead-time items ● Red = Normally long lead-time items