


# Conduit & cable



- Assemblies support 1/2", 3/4" and 1" conduit.
- W2 series attaches to 1/8" thru 3/8" flanges or #12 wire thru 1/4" plain or threaded rod.
- W6 series attaches to 3/8" thru 7/16" flanges or 3/8" plain or threaded rod.

## Guide-Rite™ Conduit To Rod Fasteners

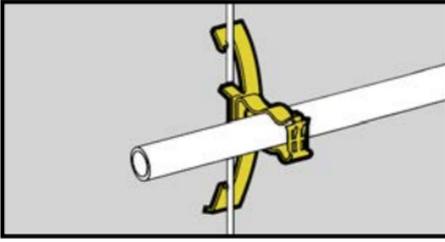


UPC/Part Number	Catalog Number	Conduit Size EMT/Rigid	Box Qty.
78101118540	<b>BG-8-12-W2</b>	1/2", 3/4"	100
78101118640	<b>BG-16-W2</b>	1"	100
78101195519	<b>BG-8-12-W6</b>	1/2", 3/4"	100
78101195520	<b>BG-16-W6</b>	1"	100

Patent #4958792



50 Lbs.


**Static Load Capacity**



25 Lbs.

Note: An independent means of support is required by NEC Article 300.11. Refer to pages 221-222 for additional support methods.

Read safety/installation instruction sheets in packages before use.

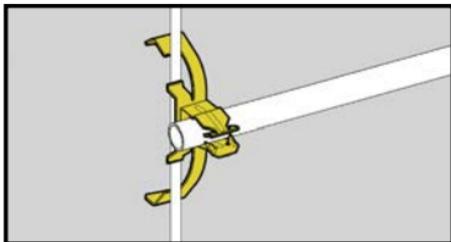


- Assemblies support 1/2", 3/4" and 1" conduit.
- W2 series attaches to 1/8" thru 3/8" flanges or #12 wire thru 1/4" plain or threaded rod.
- W6 series attaches to 3/8" thru 7/16" flanges or 3/8" plain or threaded rod.

## Push-Type Conduit To Rod Fasteners




UPC/Part Number	Catalog Number	Conduit Size	Box Qty.
78101119325	<b>BP-8-W2</b>	1/2" EMT	100
78101119420	<b>BP-12-W2</b>	3/4" EMT or 1/2" IMC. Rigid	100
78101119505	<b>BP-16-W2</b>	1" EMT or 3/4" IMC, Rigid	100
78101195521	<b>BP-8-W6</b>	1/2" EMT	100
78101195522	<b>BP-12-W6</b>	3/4" EMT or 1/2" IMC. Rigid	100
78101195523	<b>BP-16-W6</b>	1" EMT or 3/4" IMC, Rigid	100



25 Lbs.

### Ultimate Static Load Capacity



15 Lbs.

Note: An independent means of support is required by NEC Article 300.11. Refer to pages 221-222 for additional support methods.

Read safety/installation instruction sheets in packages before use.