



Eaton Basic ePDUs

Cost effective single-phase power distribution solutions up to 30 amps.

The Eaton® Basic ePDU™ product line is designed to provide high reliability power distribution to critical power loads. These units feature a small form factor and lightweight chassis that is easy to mount. Rackmount models feature a rotating mounting bracket that allows for vertical mounting. Vertical models offer blind mount bracket and keyhole button mounting options. The high outlet density and a variety of plug/receptacle configurations make it easy to find a configuration that meets your needs. These configurations are stocked for high availability.

Key features and benefits:

- Cord lengths up to 15 feet
- Rackmount or 24", 48" and 60" lengths for outlet accessibility
- High outlet density up to 36 outlets
- Variable clip foot and button mounting options
- Single-phase 15A to 30A, 120-volt and 240-volt configurations
- UL 60950-1 approved for IT or data center use



EATON

Powering Business Worldwide

Three-year warranty

Register your Eaton ePDU and receive a three-year extended warranty.


1U Rackmount ePDU

B-Line Part #	Eaton PQ Part #	Input Plug	Breaker	Max kW	Cord (ft)	Receptacles	Dimensions (H x W x D, in)
SBEPBZ78	EPBZ78	L5-30P	(2) 20A	2.88	15	(20) 5-20R	1.7 x 17.0 x 3.5
SBEPBZ79	EPBZ79	L6-30P	(2) 20A	4.99	15	(16) C13, (4) C19	1.7 x 17.0 x 5.1
SBEPBZ82	EPBZ82	L5-20P/5-20P*	None	1.92	15	(12) 5-20R	1.7 x 17.3 x 2.3
SBEPBZ83	EPBZ83	5-15P	None	1.44	15	(12) 5-15R	1.7 x 17.3 x 2.3
SBEPBZ84	EPBZ84	L5-30P	(2) 20A	2.88	10	(10) 5-20R	1.7 x 17.0 x 3.5
SBEPBZ85	EPBZ85	5-20P	None	1.92	10	(12) 5-20R	1.7 x 17.3 x 2.3
SBEPBZ86	EPBZ86	5-15P	None	1.44	10	(12) 5-15R	1.7 x 17.3 x 2.3
SBEPBZ88	EPBZ88	C20	None	3.33	6	(10) C13, (2) C19	1.7 x 19.0 x 2.4
SBEPBZ91	EPBZ91	L6-30P	(2) 20A	4.99	10	(10) C13	1.7 x 17.0 x 3.5
SBEPBZ94	EPBZ94	L6-30P	(2) 20A	4.99	6	(6) C19	1.7 x 19.0 x 2.4
SBEPBZ95	EPBZ95	L6-20P	None	3.33	6	(12) C13, (1) C19	1.7 x 19.0 x 2.4
SBEPBZ99	EPBZ99	L5-20P	(1) 20A	1.92	6	(12) 5-20R	1.7 x 19.0 x 2.4

* These units ship with an adapter allowing for 5-20P input plug



SBEPBZ94 Rackmount ePDU

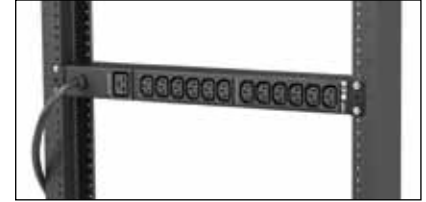

SBEPBZ95 Rackmount ePDU

OU Vertical Mount ePDU

B-Line Part #	Eaton PQ Part #	Input Plug	Breaker	Max kW	Cord (ft)	Receptacles	Dimensions (H x W x D, in)
SBEPBZ71	EPBZ71	L5-20P/5-20P*	(1) 20A	1.92	15	(30) 5-20R	72.0 x 1.5 x 1.5
SBEPBZ72	EPBZ72	L5-20P/5-20P*	(1) 20A	1.92	15	(18) 5-20R	48.0 x 1.5 x 1.5
SBEPBZ73	EPBZ73	5-15P	(1) 15A	1.44	15	(18) 5-15R	48.0 x 1.5 x 1.5
SBEPBZ74	EPBZ74	L5-20P/5-20P*	None	1.92	15	(14) 5-20R	23.9 x 1.5 x 1.5
SBEPBZ75	EPBZ75	5-15P	None	1.44	15	(14) 5-15R	23.9 x 1.5 x 1.5
SBEPBZ77	EPBZ77	L5-20P/5-20P*	(1) 20A	1.92	15	(24) 5-20R	60.0 x 1.5 x 1.5
SBEPBZ80	EPBZ80	L6-30P	(2) 20A	4.99	10	(30) C13, (6) C19	52.9 x 1.9 x 2.2
SBEPBZ89	EPBZ89	C14	None	2.88	6	(16) C13	28.0 x 1.9 x 2.2
SBEPBZ90	EPBZ90	L5-30P	(2) 20A	2.88	15	(24) 5-20R	40.0 x 1.9 x 2.1
SBEPBZ92	EPBZ92	L6-30P	(2) 20A	4.99	10	(20) C13, (4) C19	42.0 x 1.9 x 2.2
SBEPBZ93	EPBZ93	L6-20	None	3.33	10	(20) C13, (4) C19	40.0 x 1.9 x 2.2
SBEPBZ96	EPBZ96	L5-20P	(1) 20A	1.92	6	(24) 5-20R	60.0 x 1.5 x 1.5
SBEPBZ97	EPBZ97	5-20P	(1) 20A	1.92	6	(24) 5-20R	48.0 x 1.5 x 1.5
SBEPBZ98	EPBZ98	5-15P	(1) 15A	1.44	6	(18) 5-15R	40.0 x 1.5 x 1.5

* These units ship with an adapter allowing for 5-20P input plug



SBEPBZ75 Vertical Mount ePDU



ePDU Vertical Application

ePDU Mounting Bracket

B-Line Part #	Description
SB3010FB	ePDU Fixed Mounting Bracket (Rack, Vertical)
SB3011FB	ePDU Adjustable Mounting Bracket (Rack, Vertical)
SB3012	ePDU Fixed Mounting Bracket (Cabinet, Vertical)



SB3010FB Mounting Bracket



SB3011FB Mounting Bracket



SB3012 Mounting Bracket

To learn more about Eaton's Basic ePDUs, please visit: Eaton.com/epdu