

KwikWire™ Accessories Working Loads

Accessory Part No.	Wire Rope Dia.	Lbs. Safety Factor 5
BKA-063-XXX	1/16"	0 - 30
BKL-063-XXX	1/16"	0 - 75
BKL-094-XXX	3/32"	25-150
BKT-063-XXX	1/16"	0 - 75
BKYTX-063-XXX		
BK3TX-063-XXX		
BKH-094-XXX	3/32"	25 - 150
BKYHXX-094-XXX		
BK3HXX-094-XXX		
BKYWXX-063-XXX	1/16"	0 - 75
BK3WXX-063-XXX		
BKYWXX-094-XXX	3/32"	25 - 150
BK3WXX-094-XXX		
BKBY-063-XXX	1/16"	0 - 75
BKYBY-XX-063-XXX		
BK3BY-XX-063-XXX		
BKBZZ-094-XXX	3/32"	25 - 150
BKYBZZ-XX-094-XXX		
BK3BZZ-XX-094-XXX		


Note:

- "XX" = leg length, e.g. "12", "18", or "30"
- "YY" = bolt size, e.g. "25"(1/4" bolt) or "M6"
- "ZZ" = bolt size, e.g. "38"(3/8" bolt) or "M8", "M10"
- "XXX" = straight length, e.g. "40", "80", "120", "180", "240", or "360"
- Catalog number suffix "-XXX" may be omitted to designate a loop size
- Catalog number may be followed by "K" to designate a kit

Introduction To KwikWire™ Accessories

This bulletin contains instructions for the selection, installation, and use of the KwikWire™ accessory products shown in the Single, Double, and Triple Hanger configurations. Read all instructions completely before proceeding to become familiar with the procedure and the parts being used.

Cooper Wire Rope Data

Catalog Number	Construction	Wire Rope Diameter	7 x 7
BKW063	7 x 7	1/16"	
BKW094	7 x 7	3/32"	

KwikWire™ Clamp Working Loads*

Clamp Part No.	Wire Rope Dia.	Lbs. Safety Factor 5
BKC100	1/16"	0-75
	3/32"	25-150

* Working loads shown at left are for hanging vertically. For suspending at 15°, 30°, 45° or 60° angles from vertical use the following percentage of the working loads from the chart:


15° = 96%
30° = 86%
45° = 70%
60° = 50%



Recommendations:

- Do not exceed the safe working load of the product shown in chart
- Do not use for overhead lifting or hoisting
- Do not paint cable near working area of KwikWire Clamp connector
- Do not apply lubricant
- For use in **"DRY LOCATIONS ONLY"**
- Only use to support stationary loads
- Do not splice wire together using KwikWire clamps
- Only for permanent installations. Do not re-use


Single KwikWire™ Hanger Accessory Configurations

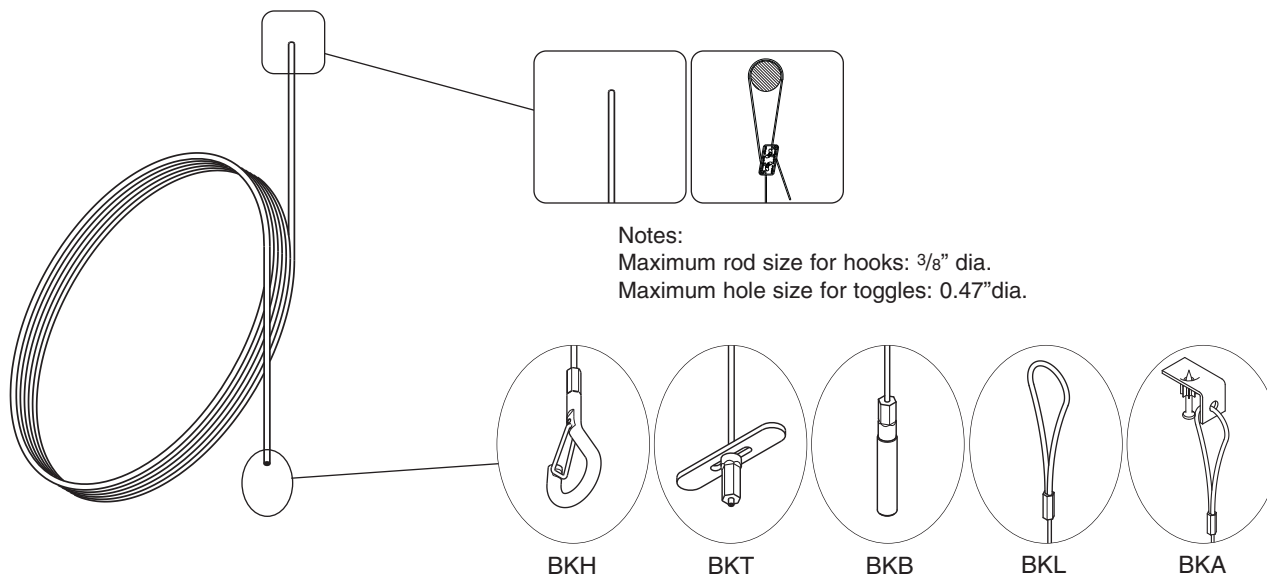


Notes:
Maximum rod size for hooks: 3/8" dia.
Maximum hole size for toggles: 0.47" dia.

KwikWire™ is a trademark of Cooper B-Line

Double KwikWire™ Hanger Accessory Configurations

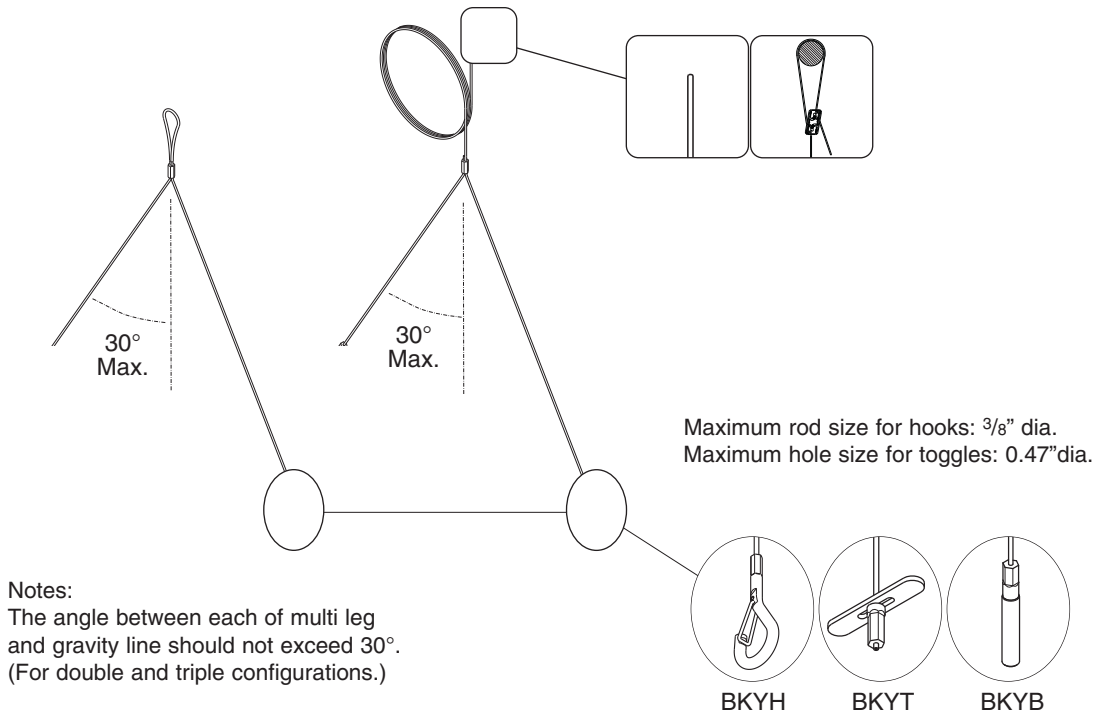

Triple KwikWire™ Hanger Accessory Configurations

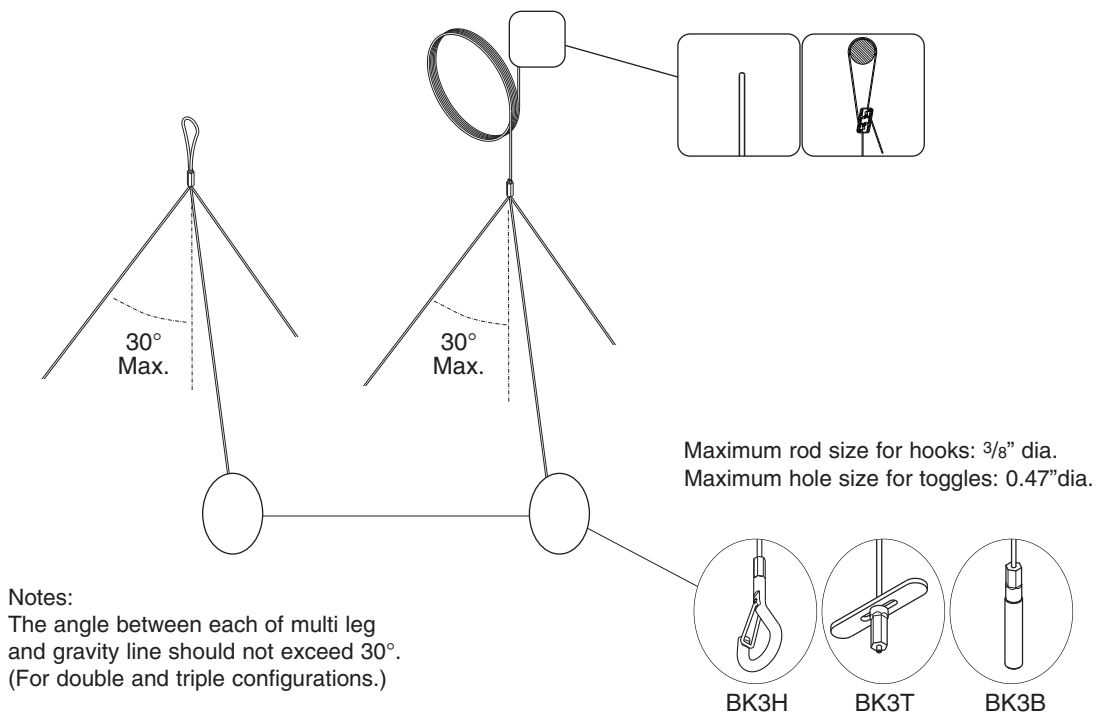

KwikWire™ is a trademark of Cooper B-Line