

LOW-PEAK®


LPN-RK_SPI

Dual-Element, Time-Delay Fuses
Class RK1 – 250 Volt

35-60A



Dimensional Data



Features:

- Permanent replacement fuse indication.
- Current-limitation for maximum short-circuit protection.
- Type 2 protection for IEC and NEMA starters when properly sized.
- High inrush current motor protection.
- Time-delay permits 130% FLA sizing for back-up motor protection.
- Protection against single-phase motor damage.
- Low watt loss power consumption.
- Electrically isolated end caps.
- 125Vdc, UL Listed.

Catalog Symbol: LPN-RK_SPI
Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current (8 seconds for 0-30A sizes)
Current-Limiting
Ampere Rating: 35 to 60A
Voltage Rating: 250Vac (or less)
125Vdc (or less)

Interrupting Rating:
AC: 300,000A RMS Sym.
DC: 100,000 Amperes
Agency Information:
UL Listed – Special Purpose*, Guide JFHR, File E56412
CSA Certified (200,000AIR), Class 1422-02, File 53787
Class RK1 per CSA C22.2, No. 248.12

*Meets all performance requirements of UL Standard 248-12 for Class RK1 fuses.

Catalog Numbers

- LPN-RK-35SPI
- LPN-RK-40SPI
- LPN-RK-45SPI
- LPN-RK-50SPI
- LPN-RK-60SPI
-


Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight**	
		Lbs.	Kg.
35-60	10	1.2	0.544


**Weight per carton.

Fuse Reducers For Class R Fuses

Equipment Fuse Clips	Desired Fuse (Case) Size	Catalog Number (Pairs) 250V
60A	30A	No. 263-R
100A	30A	No. 213-R
	60A	No. 216-R
200A	60A	No. 226-R



Recommended fuseblocks for Class R 250V fuses
See Data Sheet: 1110



For non-indicating version, the LPN-RK_SP is available. See Data Sheet: 1003

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.


LOW-PEAK®

LPN-RK_SPI

Dual-Element, Time-Delay Fuses
Class RK1 – 250 Volt

35-60A

Time-Current Characteristic Curves-Average Melt

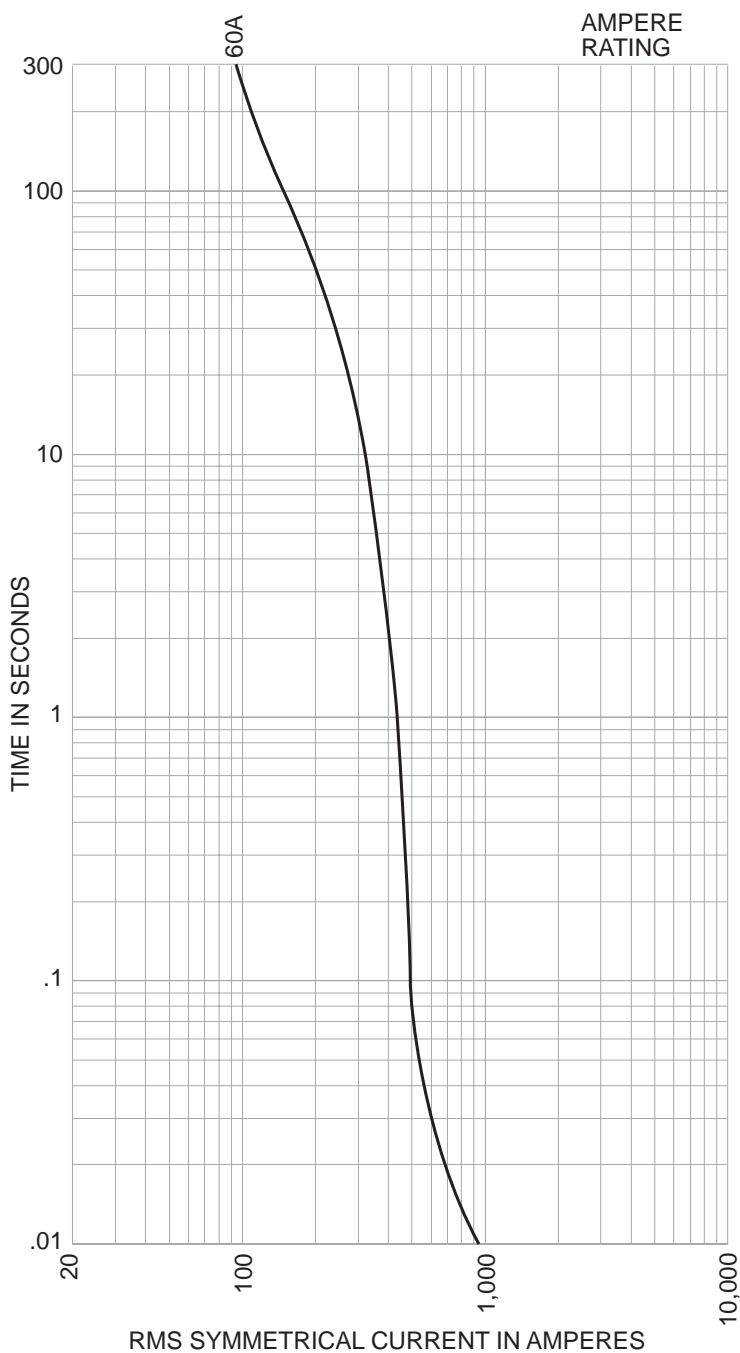


LOW-PEAK®

LPN-RK_SPI

Dual-Element, Time-Delay Fuses
Class RK1 – 250 Volt

35-60A

Current-Limitation Curves

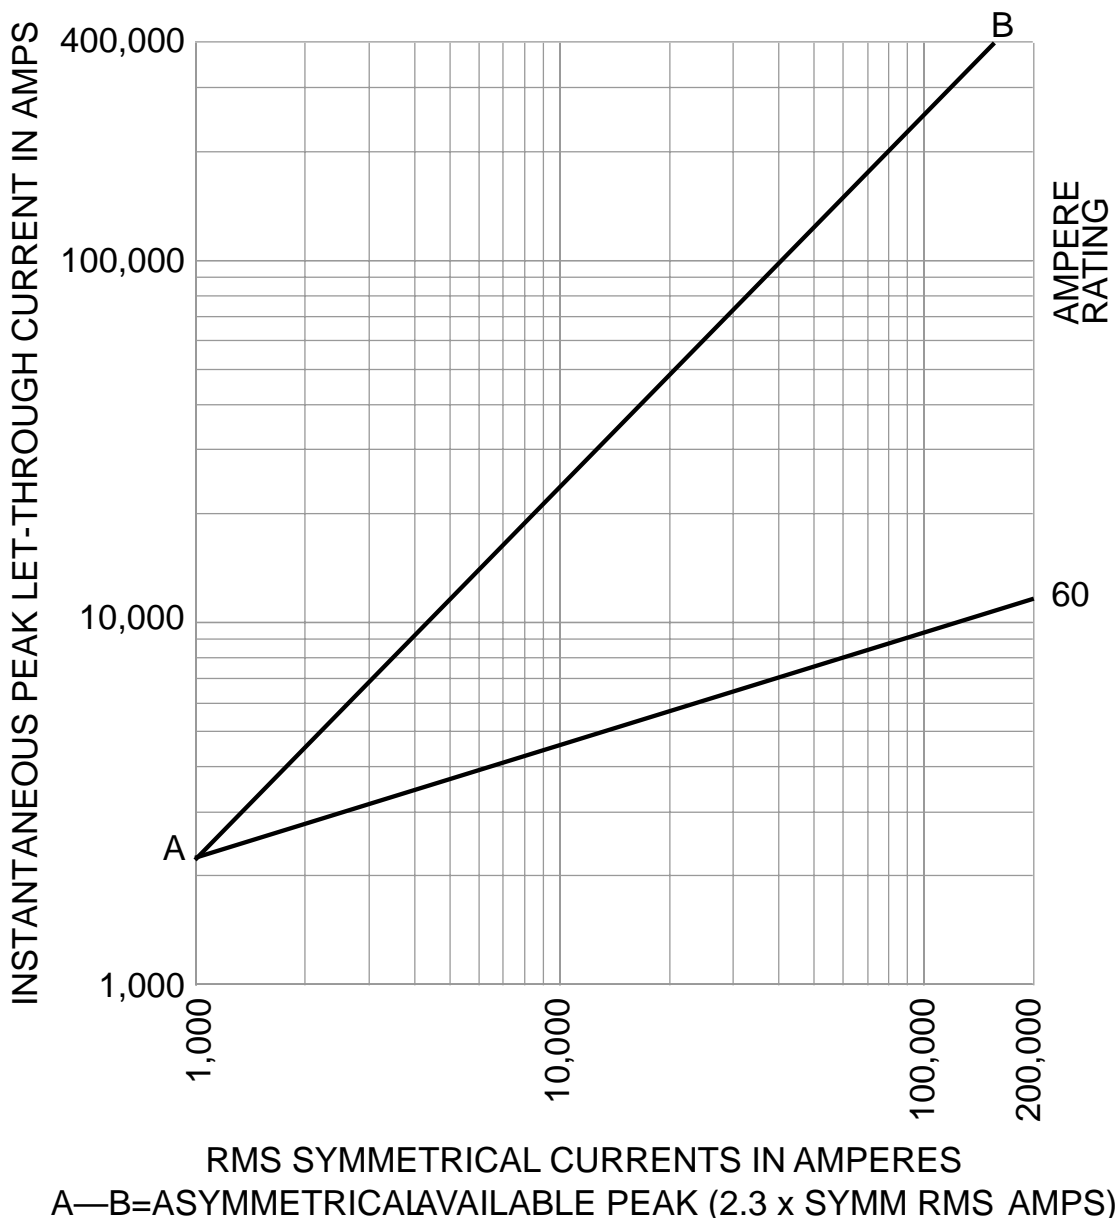

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.