




Typical Photometric Data

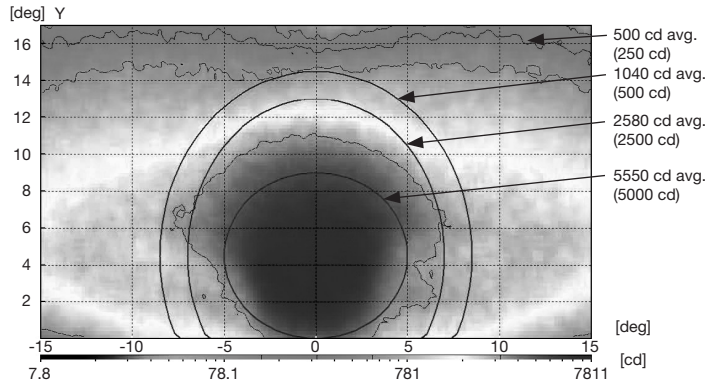

RCL, Light Distribution, White, Fig. A2-6

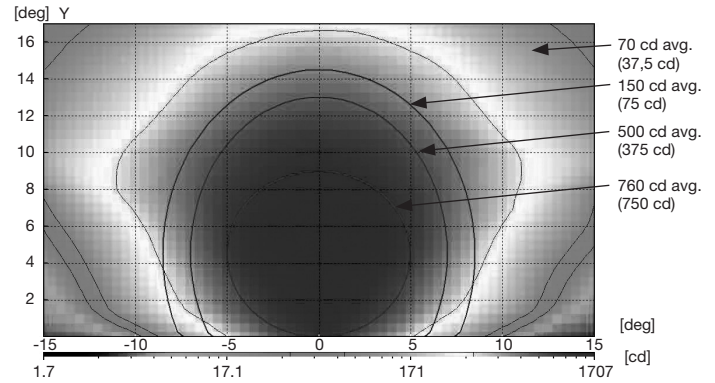

RCL, Light Distribution, Red, Fig. A2-7

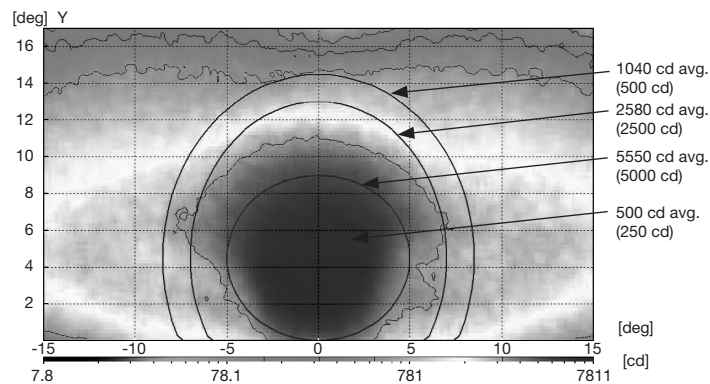

TDZ, Light Distribution, White, Fig. A2-5

Accessories

Description	Part Number	Description	Part Number
Base: L-868B, Class I, 24" Deep*	AC24242H200303	Isolation Transformer – 30/45 W, 6.6/6.6 A	33001
Bolt Set	22500	Isolation Transformer – 65 W, 6.6/6.6 A	33003
Heat Shrink Kit – 1 Piece	10047-2154		

* Two-piece can may be required depending upon the paving technique.

Renewal Parts

Description	Part Number	Description	Part Number
12" Dia. FAA Support Ring Straight (11.25" B.C.)	22504	Gasket, Base Interior	22501
12" Dia. FAA Support Ring, 4 Degree		Power Supply/Fixture Base w/ (1) L-823 Plug	22507
Toe Left (11.25" B.C.)	22505	2 Power Supplies/Fixture Base w/ (1) L-823 Plug	22523
12" Dia. FAA Support Ring, 4 Degree		2 Power Supplies/Fixture Base w/ (2) L-823 Plugs	22508
Toe Right (11.25" B.C.)	22506	Prism Replacement Kit (includes Prism Gasket)	22502
Connector Kit – L-823, 8 AWG, 0.32" to 0.43" O.D.	823KP-D4-D4	Red Cartridge Runway	22510
Connector Kit for Base	22522	White Cartridge Runway and Touchdown Zone	22509

