

Indoor Vandal Resistant LED

Selection Guide

Fail-Safe

Market focused portfolio with products designed for broad applications

Value - competitive pricing in the industry

Performance - market leading performance with industry ratings and certifications to meet the most stringent application requirements




Whether lighting hallways, stairwells, prisons, or shopping plazas in a variety of high abuse applications, **Fail-Safe's** indoor vandal resistant LED products offer a complete family of innovative, affordable, and energy saving LED solutions for your next project.

Click on products to learn more

Good

Better

Best

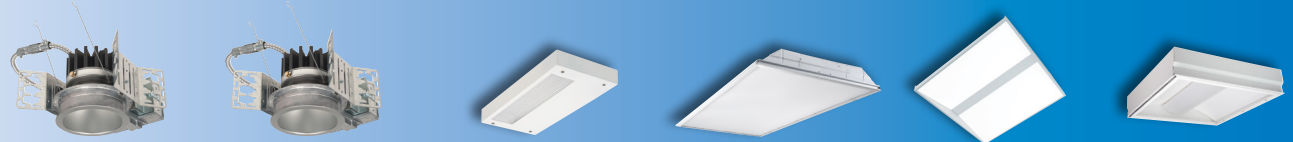

| | | FLD4B | FLD6B | UCLV | GRV | ENV | SGI |
|----------------------------------|--------------------------------|----------|----------|----------------|---------------|--------------------|---------------|
| APPLICABILITY¹ | Behavioral Health | ★★★ | ★★★ | ★★ | ★★ | ★★★ | ★★★ |
| | Indoor Vandal Resistant | ★★★ | ★★★ | ★★★ | ★★★ | ★★★ | ★★★ |
| | Indoor High Abuse | ★★★ | ★★★ | ★ | ★★★ | ★ | ★ |
| | Multifamily homes | ★★★ | ★★★ | ★ | ★★ | ★★ | ★★ |
| FEATURES | Size | 4" Round | 6" Round | 1', 2', 3', 4' | 1x4, 2x2, 2x4 | 1x2, 1x4, 2x2, 2x4 | 1x4, 2x2, 2x4 |
| | Mounting | Recessed | Recessed | Undercabinet | Recessed | Recessed | Recessed |
| | Maximum Lumen Output | 4000 | 7000 | 2400 | 17000 | 6200 | 11500 |
| | Maximum Lens Thickness | 0.187" | 0.500" | 0.187" | 0.187" | 0.375" | 0.375" |
| | Emergency | Optional | Optional | N/A | Optional | Optional | Optional |
| | Occupancy | N/A | N/A | Optional | N/A | N/A | N/A |
| CERTIFICATIONS | IP | IP66 | IP66 | IP63 | N/A | IP66 | IP65 |
| | Wet Location | Standard | Standard | N/A | N/A | Standard | Optional |
| | NSF | Standard | Standard | N/A | N/A | Standard | Optional |

Notes: 1. ★★★ = high applicability, ★★ = medium applicability, ★ = low applicability, blank = non-applicable