

AtLite[®]

StairLite 2

Setting a New Standard for Stairwell Lighting

Features:

- 4' T8 Fluorescent Lamps
- Program Rapid Start Ballasts
- Ultrasonic Motion Detector
 - with Adjustable Time Delay & Motion Sensitivity
- NiCd Battery Backup with 90 Minute Runtime

The StairLite 2 is designed to meet all stairwell lighting requirements in an energy saving fixture. The system utilizes T8 fluorescent lamps controlled by an ultrasonic motion sensor to provide safe and dependable illumination while conserving energy. In addition, a battery backup is provided for continued visibility in the event of a power outage. The StairLite 2 is an innovative product that offers unparalleled performance while blending in with its surrounding environment.

ELECTRICAL

- Choice of Input Voltage: 120 or 277 VAC, 60Hz
- T8 Fluorescent Lamp Technology
- Energy Saving, Field Adjustable Bi-Level or Dual Lamp Operation
- Two, single lamp, Program Rapid Start Ballasts for increased lamp life
- Solid-state status indicator display
- Adjustable Motion Sensitivity *see area of sensor recognition
- Adjustable Time Delay (15 sec to 40 min)
- Sealed, maintenance-free, Nickel Cadmium Battery

HOUSING CONSTRUCTION

- Heavy Duty Steel Housing and cover plate construction
- Durable White Powder Coat finish
- High impact clear Acrylic Lens
- Variety of Electrical & Mounting Knockouts for easy installation


CODE COMPLIANCE

- UL 924 Listed
- Life Safety NFPA 101
- NEC/OSHA
- Most State and Local Codes

WARRANTY

- Fixture - 1 Year
- Battery - 15 Year Pro-Rata (Nickel Cadmium)

DIMENSIONAL SPECS

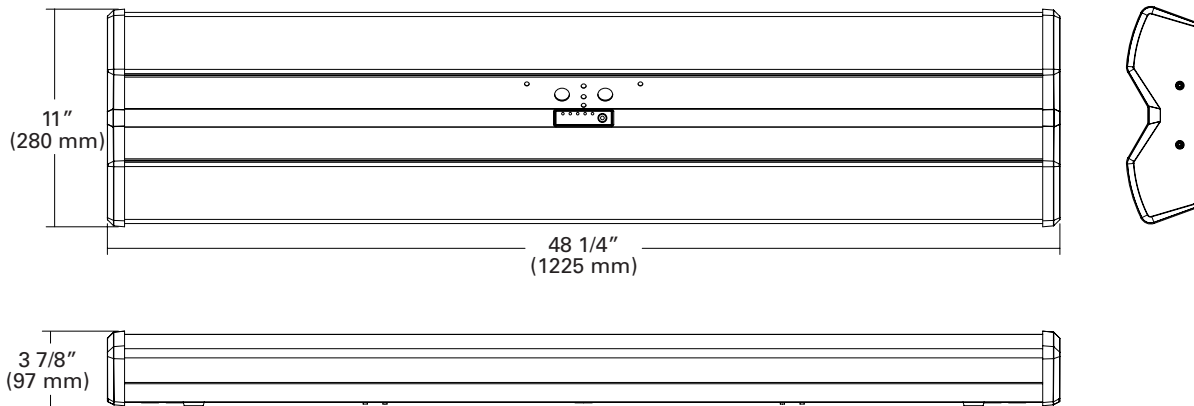

ORDERING INFORMATION - SAMPLE NUMBER: SL24

SL2	Operation	Lamp	Voltage	Mfg
Family SL2=StairLite2	4=AC Only 5=Self Powered	Blank=(2) 4' Lamps F032T8	Blank=120 VAC 7=277 VAC	Blank=IBEW Manufactured 3= IBEW-Local 3 Manufactured

