


Corelite




Stellar

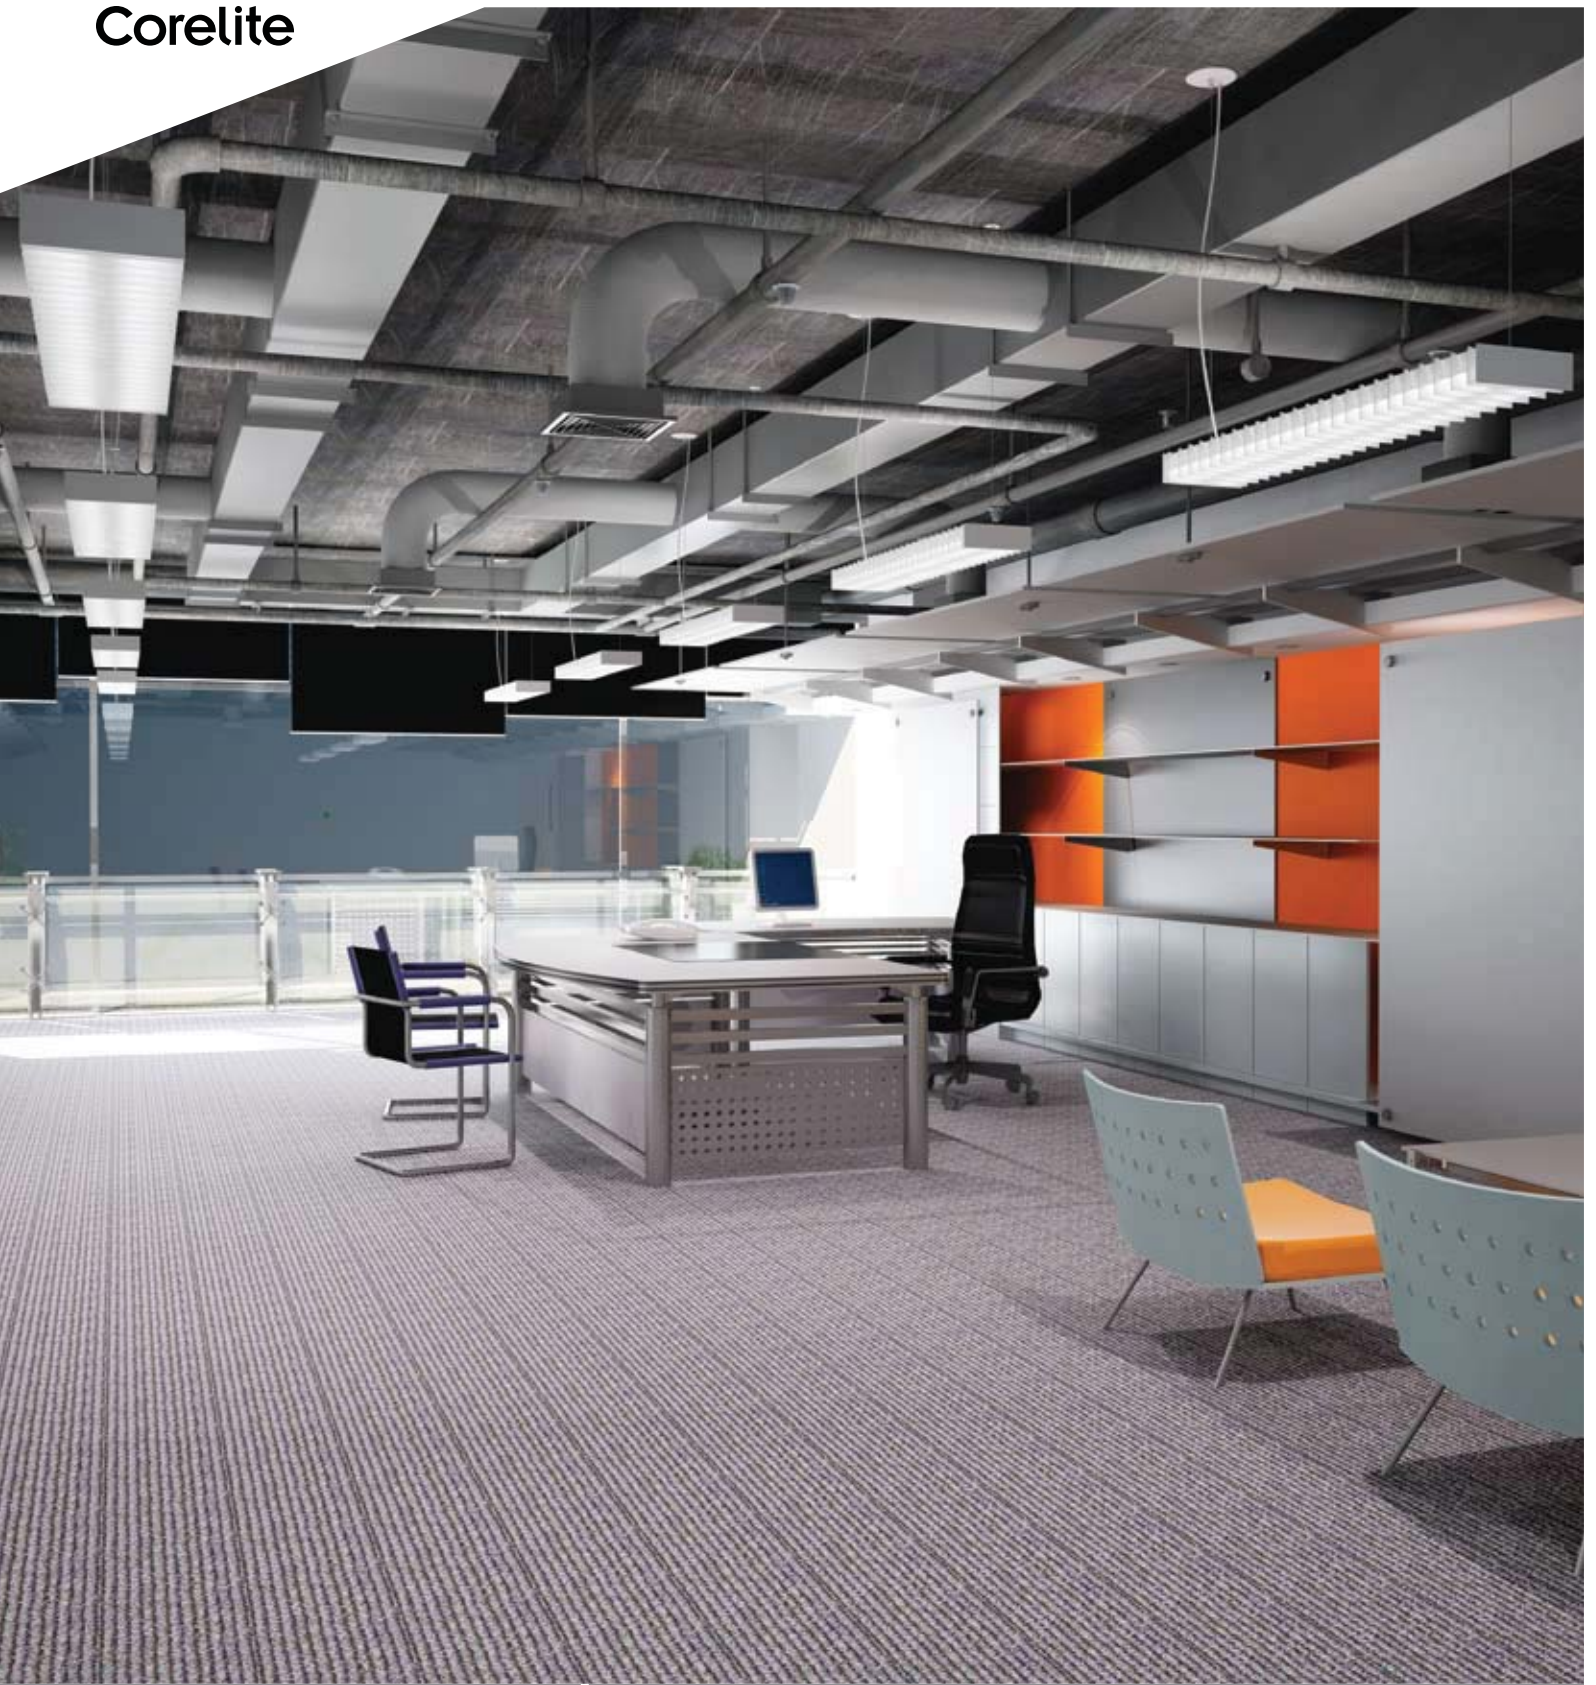


Stellar


A Product of its Surroundings.

The Stellar family of ambient fluorescent lighting, including the new squared Stellar Q series, features an open-baffle design to facilitate efficient direct-indirect light distribution, and a “refined industrial” appearance to echo trends in architecture where structure is often creatively revealed. Stellar fixtures deliver high vertical footcandles making them ideally suited to library stacks and high-ceiling open offices. Furthermore, Stellar series fixtures offer optional downlight kits and a unique optional metallic paint finish enabling the achievement of a truly customized look and feel.




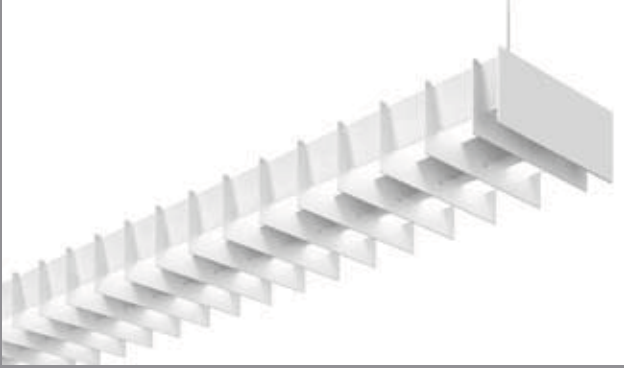


STELLAR Q 2T5
pg. 3-4

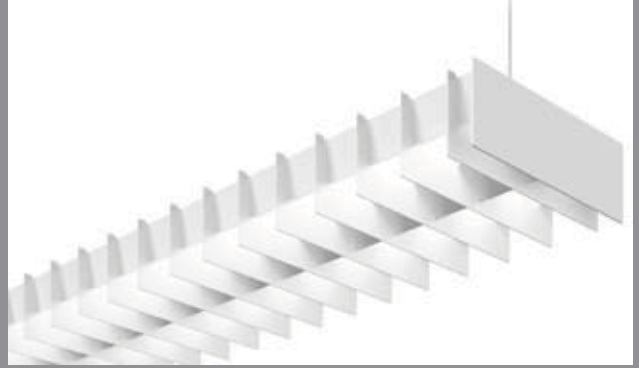

STELLAR Q 2T8
pg. 5-6

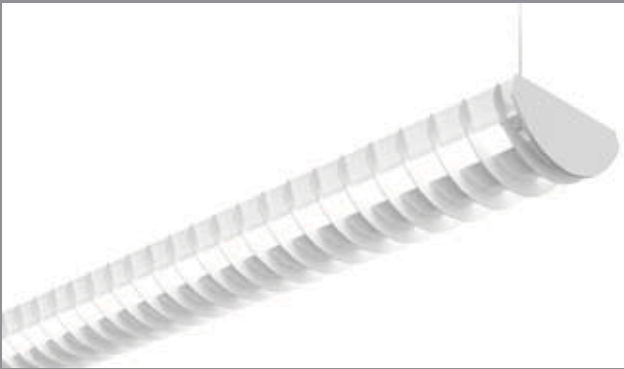

STELLAR 2T5
pg. 7-8

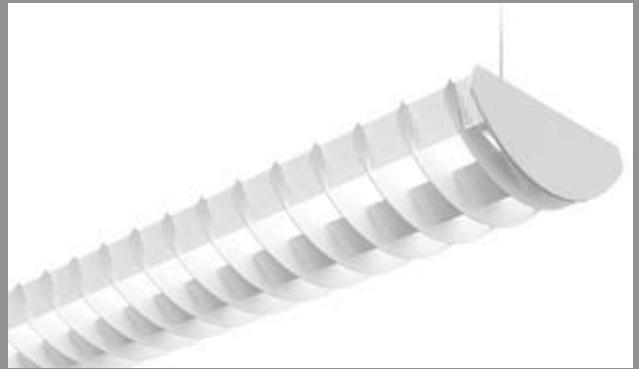

STELLAR 2T8
pg. 9-10





STELLAR 4T5/4T8
pg. 11-12


Stellar Q 2T5 (6")

SUSPENDED | DIRECT-INDIRECT / DIRECT | T5 / T5HO


With its two-lamp T5 specific profile, the squared Stellar Q stands at the very edge of modern design.

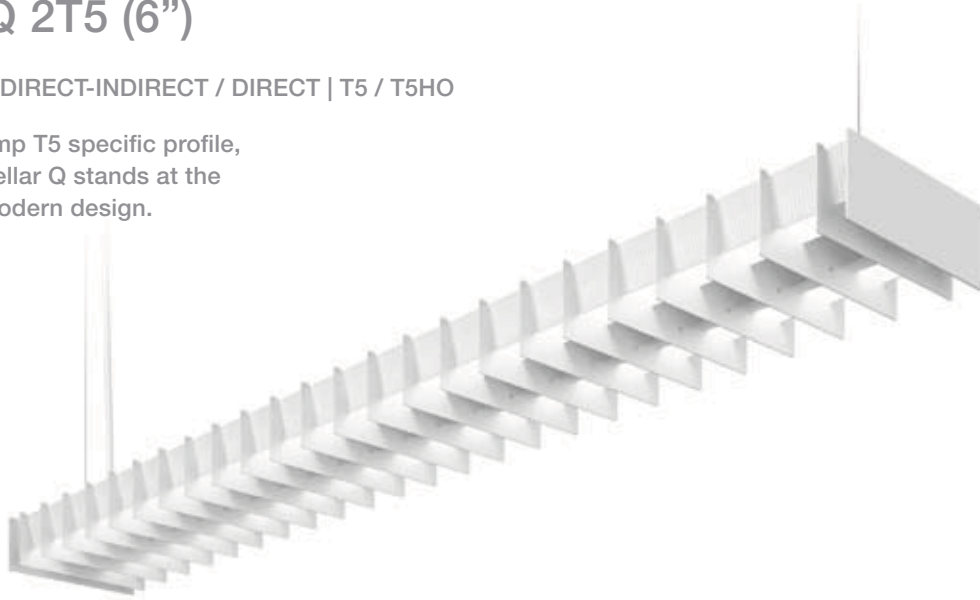

Q1-WB with standard flat end plates




100% Downlight Kit (DL100)



70% Downlight Kit (DL70)

- 2T5 specific design
- 100% or 70% Downlight Kits




Stellar Q1 Surface

SUSPENDED STELLAR Q

Corelite™

ORDERING INFORMATION:

SAMPLE NUMBER: Q1-WB-2T5-1C-UNV-AC48-T1-32'-DL70



2-1/2" [64MM]

6" [152MM]

Construction: Die-formed all aluminum baffle assembly (1.5" blade spacing) mechanically attached to a corrosion resistant formed steel ballast channel. Perforated siderail sections are 23% open with 0.0625" stagger hole spacing. Standard 4'-0", 8'-0", and 12'-0" fixture lengths combine for continuous runs.

Electrical: T5/T5HO fixtures are pre-wired with quick wire connectors and use UL listed Class P, T5/T5HO program rapid start universal voltage electronic ballasts, power factor of 97% with less than 10% THD.

Mounting: Standard aircraft cable mounts on 4'-0", 8'-0", and 12'-0" centers. Refer to spec sheets for various ceiling interface details and rigid pendant mounting details.

Finish: Fixture housings are standard white using electrostatically applied polyester powder coat paint. Consult factory for custom finishes.

End Plates: Laser cut 14-gauge cold rolled steel, mechanically attached without exposed fasteners.

SERIES
Q1=Stellar Q Suspended

OPTICS UP
W=White

OPTICS DOWN
B= Baffle

NUMBER OF LAMPS
2=2 Lamps

LAMP TYPE
N5=T5 Normal Output
T5=T5 High Output

NUMBER OF CIRCUITS
1= 1 Circuit
2=2 Circuits

WIRING*
C=Standard Circuit
D=Dimming
E=Emergency
B=Battery Pack
T=Nightlight
Y=Daylight

VOLTAGE*
120=120V
277=277V
347=347V
UNV=Universal (120V-277V)

SUSPENSION
A=Aircraft Cable
P=Rigid Pendant

POWER FEED*
C=Straight Cord
K=Curly Cord
P=Rigid Pendant

SUSPENSION LENGTH
-Fixed Cable
12", 15", 18", 21", 24" or 27" (+/- 1/2" adjustment)


-Adjustable Cable
48", 120", 240", 300", or 360"
(infinite adjustment along entire length of cable)

-Rigid Pendant
12", 15", 18", 21", 24" or 27"
(additional pendant lengths available, consult factory)

CEILING TYPE*
T1=1" T-Bar
T9=9/16" T-Bar
TS=Slotted T-Bar
ST=Structure
JB=4" Octagonal J-Box

OPTIONS
DL100=100% Downlight Kit
DL70=70% Downlight Kit

48" 96" 144"

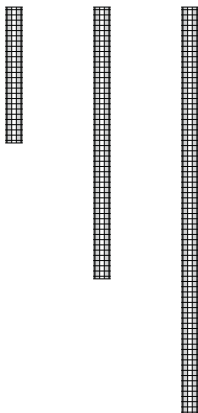

Dimensions do not include end plates or caps

SUSPENDED



PROJECT NAME:	TYPE:
CATALOG #:	

*Not all options available. Please consult your Cooper Lighting Representative for availability and technical information. Specifications and dimensions subject to change without notice.


Stellar Q 2T8 (9")

SUSPENDED | DIRECT-INDIRECT / DIRECT | T8


With its two-lamp T8 specific profile, the squared Stellar Q stands at the very edge of modern design.

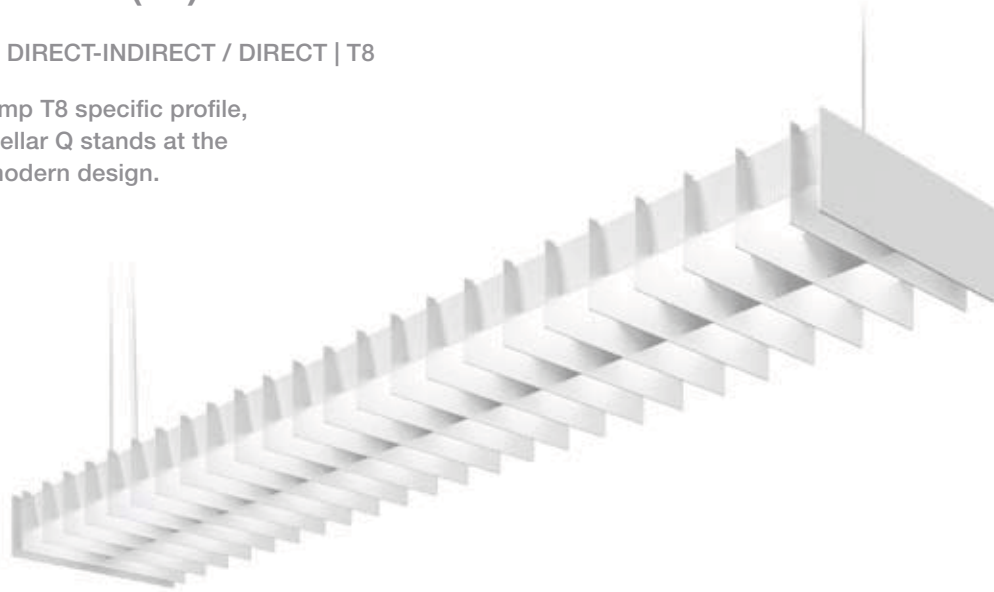

Q2-WB with standard flat end plates




100% Downlight Kit (DL100)



70% Downlight Kit (DL70)

- 2T8 specific design
- 100% or 70% Downlight Kits




Stellar Q2 Surface

SUSPENDED STELLAR Q

Corelite™

ORDERING INFORMATION:

SAMPLE NUMBER: Q2-WB-2T8-1C-UNV-AC48-T1-32'-DL70

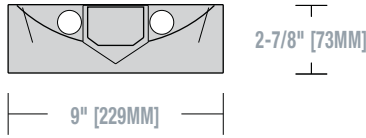

Construction: Die-formed all aluminum baffle assembly (2" blade spacing) mechanically attached to a corrosion resistant formed steel ballast channel. Perforated siderail sections are 23% open with 0.0625" stagger hole spacing. Standard 4'-0", 8'-0", and 12'-0" fixture lengths combine for continuous runs.

Electrical: T8 fixtures are pre-wired with quick wire connectors and use UL listed Class P, 265ma T8 instant start universal voltage electronic ballasts, power factor of 95% with less than 10% THD. Fixtures and electrical components certified to UL and CUL standards.

Mounting: Standard aircraft cable mounts on 4'-0", 8'-0", and 12'-0" centers. Refer to spec sheets for various ceiling interface details and rigid pendant mounting details.

Finish: Fixture housings are standard white using electrostatically applied polyester powder coat paint. Consult factory for custom finishes.

End Plates: Laser cut 14-gauge cold rolled steel, mechanically attached without exposed fasteners.

SERIES
Q2=Stellar Q Suspended

OPTICS UP
W=White

OPTICS DOWN
B= Baffle

NUMBER OF LAMPS
2=2 Lamps

LAMP TYPE
T8=T8 Normal Output

NUMBER OF CIRCUITS
1=1 Circuit
2=2 Circuits

WIRING*
C=Standard Circuit
D=Dimming
E=Emergency
B=Battery Pack
T=Nightlight
Y=Daylight

VOLTAGE*
120=120V
277=277V
347=347V
UNV=Universal (120V-277V)

SUSPENSION
A=Aircraft Cable
P=Rigid Pendant

POWER FEED*
C=Straight Cord
K=Curly Cord
P=Rigid Pendant

SUSPENSION LENGTH
-Fixed Cable
12", 15", 18", 21", 24" or 27" (+/- 1/2" adjustment)


-Adjustable Cable
48", 120", 240", 300", or 360"
(infinite adjustment along entire length of cable)

-Rigid Pendant
12", 15", 18", 21", 24" or 27"
(additional pendant lengths available, consult factory)

CEILING TYPE*
T1=1" T-Bar
T9=9/16" T-Bar
TS=Slotted T-Bar
ST=Structure
JB=4" Octagonal J-Box

RUN LENGTH
Specify luminaire length in feet.
-Individually Mounted
Luminaires may be 4', 8', or 12' in length.
-Continuously Mounted
Standard row configurations over 12' consist of 8' and 12' sections.

OPTIONS
DL100=100% Downlight Kit
DL70=70% Downlight Kit

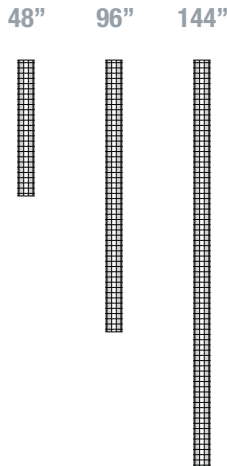

Dimensions do not include end plates or caps

SUSPENDED



PROJECT NAME:	TYPE:
CATALOG #:	

*Not all options available. Please consult your Cooper Lighting Representative for availability and technical information. Specifications and dimensions subject to change without notice.


Stellar 2T5 (6")

SUSPENDED | DIRECT-INDIRECT / DIRECT | T5 / T5HO

The industrial styled Stellar provides three light distributions for additional flexibility.

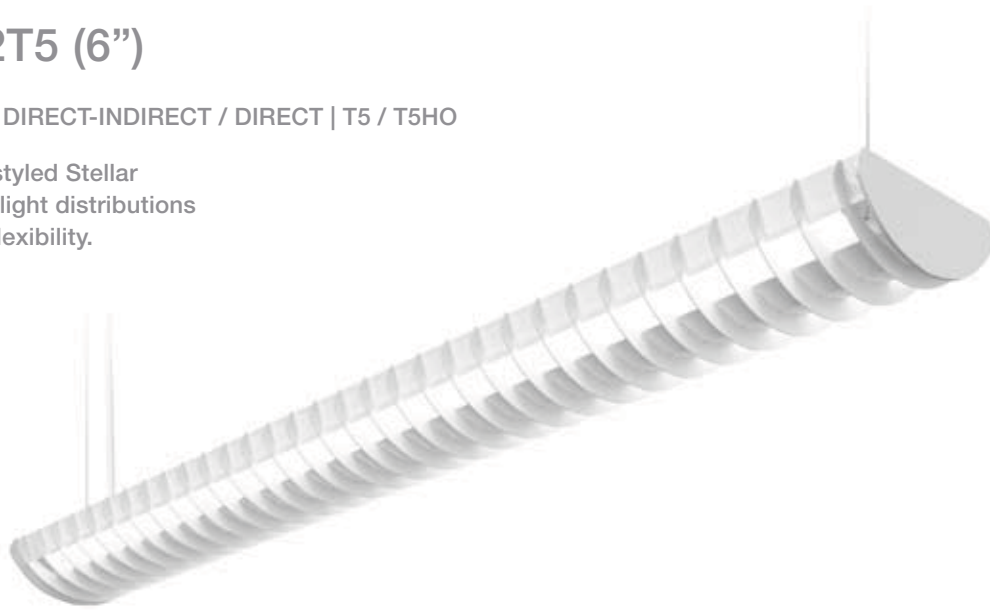

S1-WB with standard flat end plates



100% Downlight Kit (DL100)



70% Downlight Kit (DL70)

- 2T5 specific design
- 100% or 70% Downlight Kits



Stellar Wall



Stellar 2T5 Surface

SUSPENDED STELLAR

Corelite™

ORDERING INFORMATION:

SAMPLE NUMBER: S1-WB-2T5-1C-UNV-AC48-T1-32'-DL70



Construction: Die-formed all aluminum baffle assembly (1.5" blade spacing) mechanically attached to a corrosion resistant formed steel ballast channel. Perforated siderail sections are 23% open with 0.0625" stagger hole spacing. Standard 4'-0", 8'-0", and 12'-0" fixture lengths combine for continuous runs.

SERIES
S1=Stellar Suspended

OPTICS UP
W=White

OPTICS DOWN
B= Baffle

Electrical: T5/T5HO fixtures are prewired with quick wire connectors and use UL listed Class P, T5/T5HO program rapid start universal voltage electronic ballasts, power factor of 97% with less than 10% THD.

NUMBER OF LAMPS
2=2 Lamps

LAMP TYPE
N5=T5 Normal Output
T5=T5 High Output

NUMBER OF CIRCUITS
1= 1 Circuit
2=2 Circuits

WIRING*
C=Standard Circuit
D=Dimming
E=Emergency
B=Battery Pack
T=Nightlight
Y=Daylight

VOLTAGE*
120=120V
277=277V
347=347V
UNV=Universal (120V-277V)

Mounting: Standard aircraft cable mounts on 4'-0", 8'-0", and 12'-0" centers. Refer to spec sheets for various ceiling interface details and rigid pendant mounting details.

SUSPENSION
A=Aircraft Cable
P=Rigid Pendant

POWER FEED*
C=Straight Cord
K=Curly Cord
P=Rigid Pendant

SUSPENSION LENGTH
-Fixed Cable
12", 15", 18", 21", 24" or 27" (+/- 1/2" adjustment)

-Adjustable Cable
48", 120", 240", 300", or 360"
(infinite adjustment along entire length of cable)

-Rigid Pendant
12", 15", 18", 21", 24" or 27"
(additional pendant lengths available, consult factory)


CEILING TYPE*
T1=1" T-Bar
T9=9/16" T-Bar
TS=Slotted T-Bar
ST=Structure
JB=4" Octagonal J-Box

Finish: Fixture housings are standard white using electrostatically applied polyester powder coat paint. Consult factory for custom finishes.

RUN LENGTH
Specify luminaire length in feet.
-Individually Mounted
Luminaires may be 4', 8', or 12' in length.
-Continuously Mounted
Standard row configurations over 12' consist of 8' and 12' sections.

End Plates: Laser cut 14-gauge cold rolled steel, mechanically attached without exposed fasteners.

OPTIONS
DL100=100% Downlight Kit
DL70=70% Downlight Kit

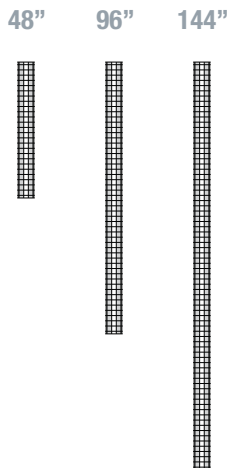

Dimensions do not include end plates or caps

SUSPENDED



PROJECT NAME:	TYPE:
CATALOG #:	

*Not all options available. Please consult your Cooper Lighting Representative for availability and technical information. Specifications and dimensions subject to change without notice.

Stellar 2T8 (9")

SUSPENDED | DIRECT-INDIRECT / DIRECT | T8

The industrial styled Stellar provides three light distributions for additional flexibility.

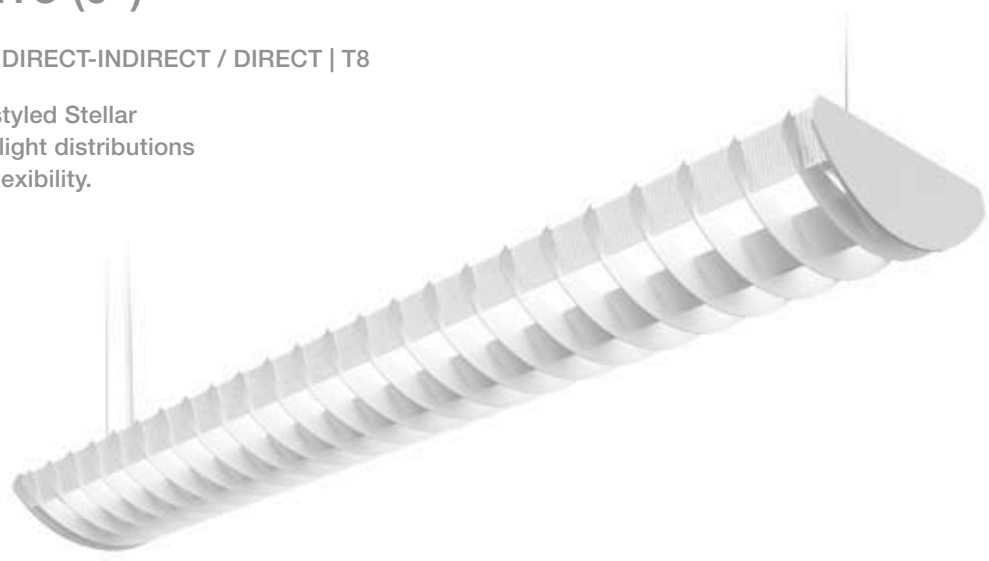

S2-WB with standard flat end plates



100% Downlight Kit (DL100)




70% Downlight Kit (DL70)

- 2T8 specific design
- 100% or 70% Downlight Kits



Stellar Wall




Stellar 2T8 Surface

SUSPENDED STELLAR

Corelite™

ORDERING INFORMATION:

SAMPLE NUMBER: S2-WB-2T8-1C-UNV-AC48-T1-32'-DL70

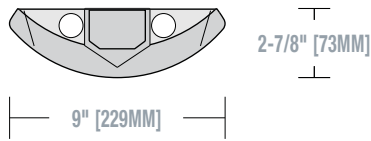

Construction: Die-formed all aluminum baffle assembly (2" blade spacing) mechanically attached to a corrosion resistant formed steel ballast channel. Perforated siderail sections are 23% open with 0.0625" stagger hole spacing. Standard 4'-0", 8'-0", and 12'-0" fixture lengths combine for continuous runs.

SERIES
S2=Stellar Suspended

OPTICS UP
W=White

OPTICS DOWN
B= Baffle

Electrical: T8 fixtures are pre-wired with quick wire connectors and use UL listed Class P, 265ma T8 instant start universal voltage electronic ballasts, power factor of 95% with less than 10% THD. Fixtures and electrical components certified to UL and CUL standards.

NUMBER OF LAMPS
2=2 Lamps

LAMP TYPE
T8=T8 Normal Output

NUMBER OF CIRCUITS
1=1 Circuit
2=2 Circuits

WIRING*
C=Standard Circuit
D=Dimming
E=Emergency
B=Battery Pack
T=Nightlight
Y=Daylight

VOLTAGE*
120=120V
277=277V
347=347V
UNV=Universal (120V-277V)

Mounting: Standard aircraft cable mounts on 4'-0", 8'-0", and 12'-0" centers. Refer to spec sheets for various ceiling interface details and rigid pendant mounting details.

SUSPENSION
A=Aircraft Cable
P=Rigid Pendant

POWER FEED*
C=Straight Cord
K=Curly Cord
P=Rigid Pendant

SUSPENSION LENGTH
-Fixed Cable
12", 15", 18", 21", 24" or 27" (+/- 1/2" adjustment)

-Adjustable Cable
48", 120", 240", 300", or 360"
(infinite adjustment along entire length of cable)

-Rigid Pendant
12", 15", 18", 21", 24" or 27"
(additional pendant lengths available, consult factory)


CEILING TYPE*
T1=1" T-Bar
T9=9/16" T-Bar
TS=Slotted T-Bar
ST=Structure
JB=4" Octagonal J-Box

RUN LENGTH
Specify luminaire length in feet.
-Individually Mounted
Luminaires may be 4', 8', or 12' in length.
-Continuously Mounted
Standard row configurations over 12' consist of 8' and 12' sections.

Finish: Fixture housings are standard white using electrostatically applied polyester powder coat paint. Consult factory for custom finishes.

End Plates: Laser cut 14-gauge cold rolled steel, mechanically attached without exposed fasteners.

OPTIONS
DL100=100% Downlight Kit
DL70=70% Downlight Kit

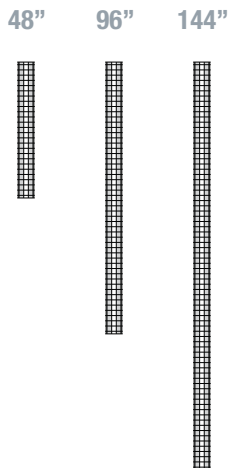

Dimensions do not include end plates or caps

SUSPENDED



PROJECT NAME:	TYPE:
CATALOG #:	

*Not all options available. Please consult your Cooper Lighting Representative for availability and technical information. Specifications and dimensions subject to change without notice.


Stellar 4T5/4T8 (12")

SUSPENDED | DIRECT-INDIRECT / DIRECT | T5 / T5HO / T8

The industrial styled Stellar provides three light distributions for additional flexibility.

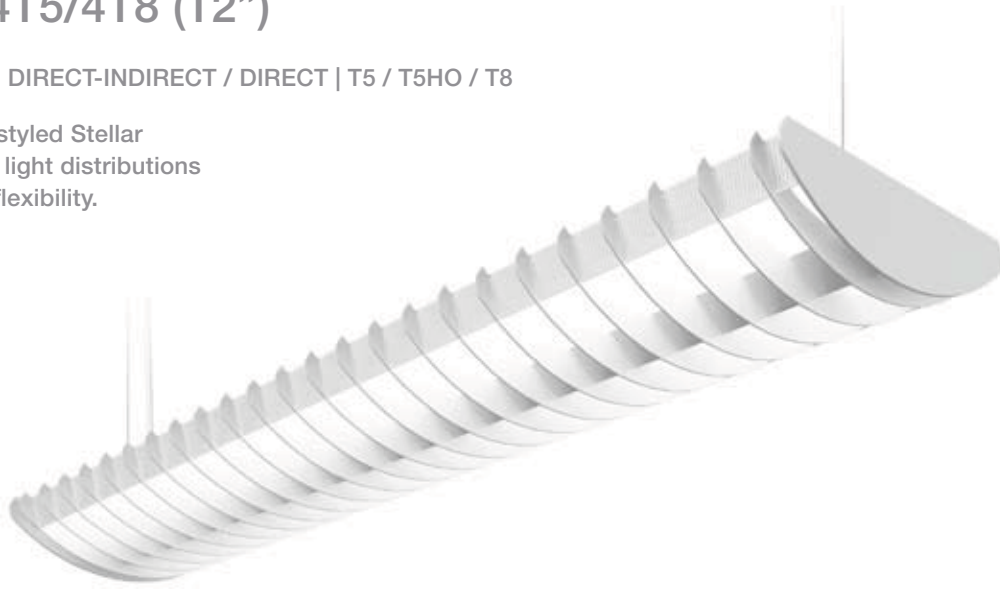

S4-WB with standard flat end plates



100% Downlight Kit
(DL100)



70% Downlight Kit
(DL70)

- 4-lamp specific design
- 100% or 70% Downlight Kits




Stellar Wall

SUSPENDED STELLAR

Corelite™

ORDERING INFORMATION:

SAMPLE NUMBER: S4-WB-4T8-1C-UNV-AC48-T1-32'-DL70

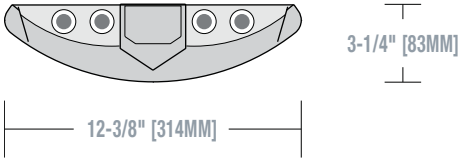

Construction: Die-formed all aluminum baffle assembly (3" blade spacing) mechanically attached to a corrosion resistant formed steel ballast channel. Perforated siderail sections are 23% open with 0.0625" stagger hole spacing. Standard 4'-0", 8'-0", and 12'-0" fixture lengths combine for continuous runs.

Electrical: T5/T5HO fixtures are pre-wired with quick wire connectors and use UL listed Class P, T5/T5HO program rapid start universal voltage electronic ballasts, power factor of 97% with less than 10% THD. T8 fixtures are pre-wired with quick wire connectors and use UL listed Class P, 265ma T8 instant start universal voltage electronic ballasts, power factor of 95% with less than 10% THD. Fixtures and electrical components certified to UL and CUL standards.

Mounting: Standard aircraft cable mounts on 4'-0", 8'-0", and 12'-0" centers. Refer to spec sheets for various ceiling interface details and rigid pendant mounting details.

Finish: Fixture housings are standard white using electrostatically applied polyester powder coat paint. Consult factory for custom finishes.

End Plates: Laser cut 14-gauge cold rolled steel, mechanically attached without exposed fasteners.

SERIES
S4=Stellar Suspended

OPTICS UP
W=White

OPTICS DOWN
B= Baffle

NUMBER OF LAMPS
4=4 Lamps

LAMP TYPE
N5=T5 Normal Output
T5=T5 High Output
T8=T8 Normal Output

NUMBER OF CIRCUITS
1=1 Circuit
2=2 Circuits

WIRING*
C=Standard Circuit
D=Dimming
E=Emergency
B=Battery Pack
T=Nightlight
Y=Daylight

VOLTAGE*
120=120V
277=277V
347=347V
UNV=Universal (120V-277V)

SUSPENSION
A=Aircraft Cable
P=Rigid Pendant

POWER FEED*
C=Straight Cord
K=Curly Cord
P=Rigid Pendant

SUSPENSION LENGTH
-Fixed Cable
12", 15", 18", 21", 24" or 27" (+/- 1/2" adjustment)


-Adjustable Cable
48", 120", 240", 300", or 360"
(infinite adjustment along entire length of cable)

-Rigid Pendant
12", 15", 18", 21", 24" or 27"
(additional pendant lengths available, consult factory)

CEILING TYPE*
T1=1" T-Bar
T9=9/16" T-Bar
TS=Slotted T-Bar
ST=Structure
JB=4" Octagonal J-Box

RUN LENGTH
Specify luminaire length in feet.
-Individually Mounted
Luminaires may be 4', 8', or 12' in length.
-Continuously Mounted
Standard row configurations over 12' consist of 8' and 12' sections.

OPTIONS
DL100=100% Downlight Kit
DL70=70% Downlight Kit

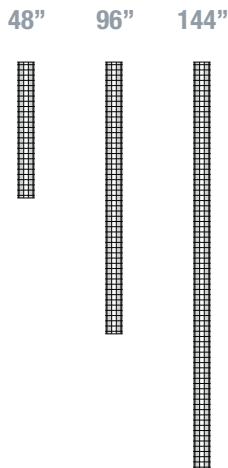

Dimensions do not include end plates or caps

SUSPENDED

PROJECT NAME:	TYPE:
CATALOG #:	

*Not all options available. Please consult your Cooper Lighting Representative for availability and technical information. Specifications and dimensions subject to change without notice.





Corelite

4675 Holly Street
Denver, CO 80216

P: 303-393-1522
F: 303-393-1477

Cooper Lighting

Customer First Center
1121 Highway 74 South
Peachtree City, GA 30269

P: 770-486-4800
F: 770-486-4801

www.cooperlighting.com

International Sales, USA

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269

P: 770-486-4800
F: 770-486-4801

Canada

Cooper Lighting
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8

P: 905-507-4000
F: 905-568-7049

The Cooper Lighting Family

Halo
Metalux
Lumark
Sure-Lites
Neo-Ray
Corelite
Portfolio
Iris
Shaper
io
Lumière
Invue
McGraw-Edison
Streetworks
Fail-Safe
PDS
MWS
RSA
Ametrix

Domestic Facilities

Cranbury, New Jersey
Elk Grove Village, Illinois
Irving, Texas
Ontario, California
Peachtree City, Georgia

Canadian Facilities

Calgary, Alberta T2E 7V9
Mississauga, Ontario L5R 1B8

Cooper Lighting and Corelite logos are valuable trademarks of Cooper Industries in the United States and other countries.
You are not permitted to use the Cooper Trademarks without the prior written consent of Cooper Industries.

Cooper Industries, Ltd.
600 Travis, Ste. 5800
Houston, TX 77002-1001
P: 713-209-8400
www.cooperindustries.com