


Z3 - 2x2



LED Level 2 - 44W / 3480 Lumens (78.8 LPW)<sup>2</sup>  
 LED Level 1 - 34W / 2740 Lumens (80.2 LPW)<sup>2</sup>  
 (2) 24W T5 - 50W / 2712 Lumens (52 LPW)<sup>2</sup>

Z3 - 1x2




LED Level 2 - 45W / 3300 Lumens (72.5 LPW)<sup>2</sup>  
 LED Level 1 - 34W / 2550 Lumens (74.7 LPW)<sup>2</sup>  
 (2) 24W T5 - 50W / 2712 Lumens (52 LPW)<sup>2</sup>

ZMINI - 1x1



LED Level 2 - 22W / 1400 Lumens (64 LPW)<sup>1</sup>  
 (1) 32 TIT - 32W / 1430 Lumens (44 LPW)<sup>1</sup>

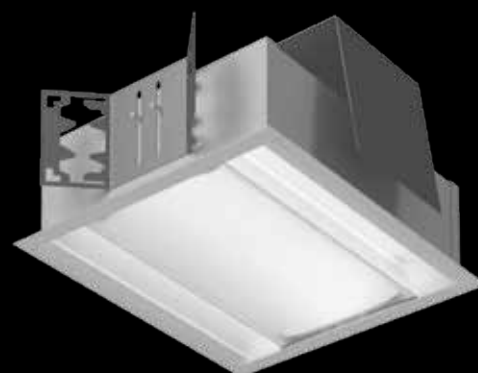

... and Performance

While fluorescent sources continue to be a viable mainstream solution for ambient lighting applications, LED technology is surpassing the performance of fluorescent lamps. Corelite's Z3 and R3 2x2 LED fixtures produce only 3% fewer delivered lumens than one high output T5 lamp yet consume 32% less energy.

Until today, LED sources in ambient lighting applications have been sold on the environmental and maintenance benefits alone. With Corelite's recessed LED family, the full advantage of LED technology is realized not only through the environmental impacts but through dramatic energy savings and unmatched lighting performance.

1: Extrapolated Photometry 2: Photometric data derived from the following ies files: P30767, P30768, ITL67077, P30765, ITL62435

**Corelite**  
 4675 Holly Street  
 Denver, Colorado 80216

P: 303-393-1522  
 F: 303-393-1477

**Cooper Lighting**  
 Customer First Center  
 1121 Highway 74 South  
 Peachtree City, GA 30269

P: 770-486-4800  
 F: 770-486-4801

[www.cooperlighting.com](http://www.cooperlighting.com)

**International Sales, USA**  
 Cooper Lighting  
 1121 Highway 74 South  
 Peachtree City, GA 30269

P: 770-486-4800  
 F: 770-486-4801

**Canada**  
 Cooper Lighting  
 5925 McLaughlin Road  
 Mississauga, Ontario L5R 1B8

P: 905-507-4000  
 F: 905-568-7049


**The Cooper Lighting Family**  
 Halo  
 Metalux  
 Lumark  
 Sure-Lites  
 Neo-Ray  
 Corelite  
 Portfolio  
 Iris  
 Shaper  
 io  
 Lumière  
 Invue  
 McGraw-Edison  
 Streetworks  
 Fail-Safe  
 MWS  
 DLS  
 RSA  
 Ametrix

**Domestic Facilities**  
 Cranbury, New Jersey  
 Elk Grove Village, Illinois  
 Irving, Texas  
 Ontario, California  
 Peachtree City, Georgia

**Canadian Facilities**  
 Calgary, Alberta T2E 7V9

Cooper Lighting and Corelite logos are valuable trademarks of Cooper Industries in the United States and other countries. You are not permitted to use the Cooper Trademarks without the prior written consent of Cooper Industries.

**Cooper Industries, Ltd.**  
 600 Travis, Ste. 5800  
 Houston, TX 77002-1001  
 P: 713-209-8400  
[www.cooperindustries.com](http://www.cooperindustries.com)

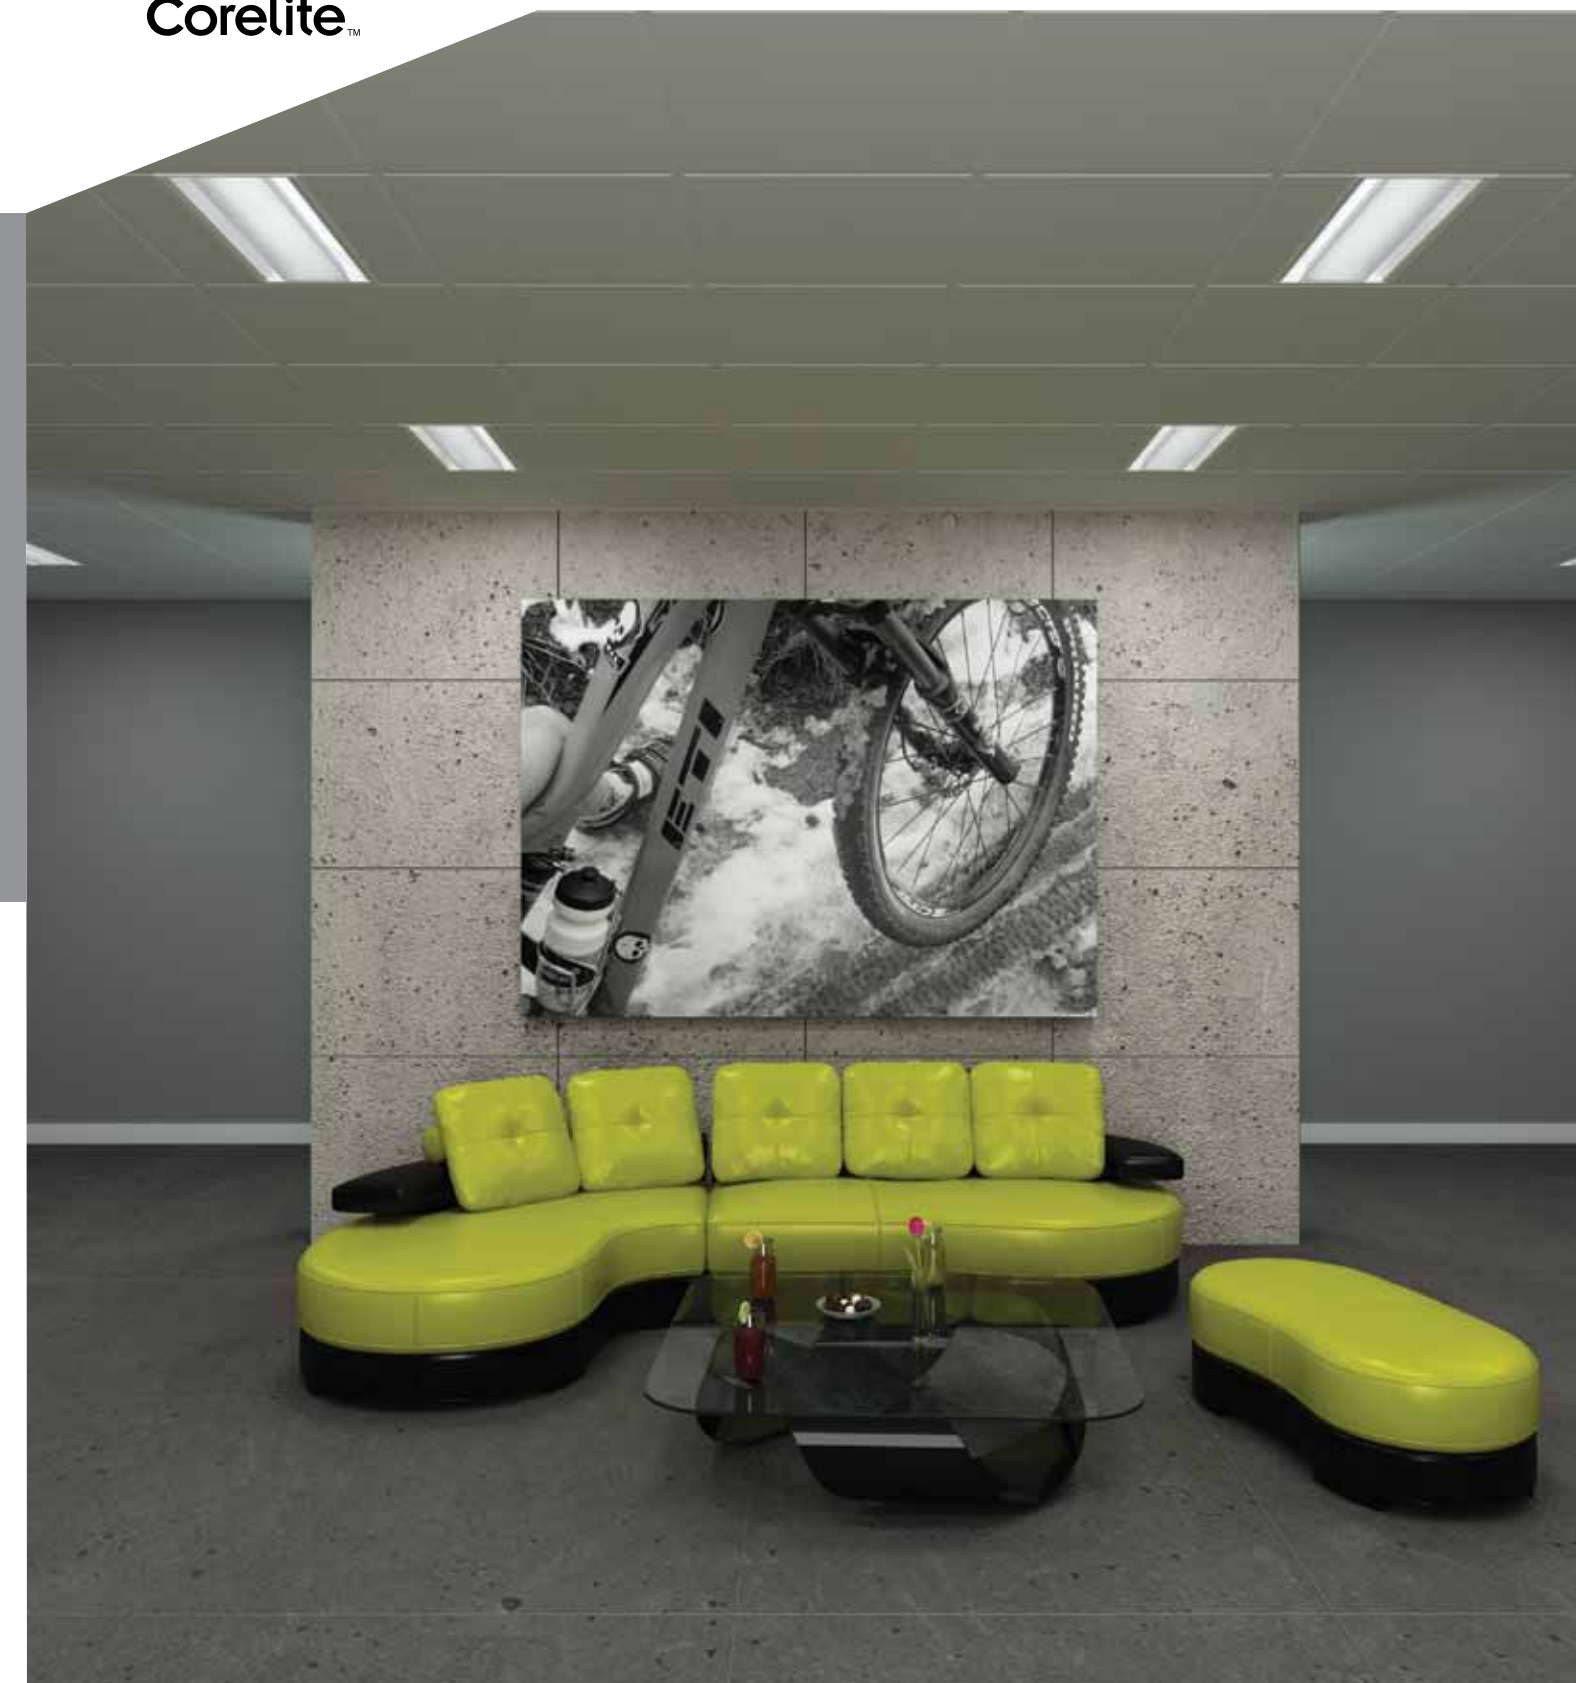

LINEAR LED  
 P L A T F O R M

Class R LED

Recessed Lighting Solutions



**R3 - 2x2**



**LED Level 2** - 44W / 3480 Lumens (78.8 LPW)<sup>2</sup>  
**LED Level 1** - 34W / 2740 Lumens (80.2 LPW)<sup>2</sup>  
**(2) 24W T5** - 50W / 2712 Lumens (52 LPW)<sup>2</sup>



**R3 - 1x2**




**LED Level 2** - 45W / 3300 Lumens (72.5 LPW)<sup>2</sup>  
**LED Level 1** - 34W / 2550 Lumens (74.7 LPW)<sup>2</sup>  
**(2) 24W T5** - 50W / 2712 Lumens (52 LPW)<sup>2</sup>



**RMINI - 1x1**



**LED Level 2** - 22W / 1400 Lumens (64 LPW)<sup>1</sup>  
**(1) 32 TTT** - 32W / 1430 Lumens (44 LPW)<sup>1</sup>

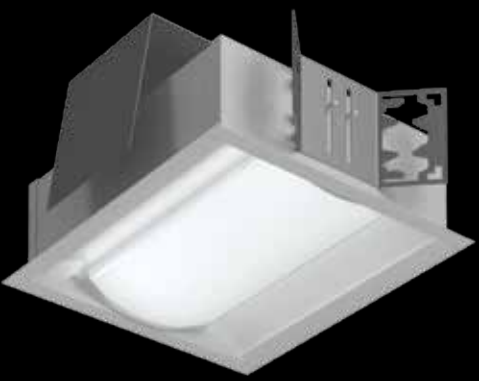

**Unmatched in Application...**


Corelite's R3 and Z3 LED fixtures combine the technology of Cooper Lighting's internally developed Linear LED Platform with the high sense of style and superior brightness management that characterizes the Class R family. The proprietary low-power, glare-free LED platform delivers a soft, diffuse volume of pure white light that carries the general character of a fluorescent source while simultaneously eliminating unsightly socket shadows and the hassle of luminaire maintenance. In addition to the aesthetic advantage, a guaranteed system life of 50,000 hours combined with exceptional efficacy make the Class R LED family the ultimate solution to satisfy the most stringent energy requirements. The R3 and Z3 LED fixtures maintain Class R's dedication to shallow plenum applications with shallow 3-3/4" deep housings while continuing to provide optimal visual comfort with an ultra-light carbon footprint. Available in 1x1, 1x2, and 2x2, Corelite's recessed LED offering is unsurpassed in application flexibility and performance.



**ALM 1.0**  
patent pending



- **Low-power .25 watt discrete LED array**
- **90 Lumens Per Watt\***
- **Future proof modular design**
- **Dimmable 0-10v (15%-100%)**
- **3 Color Temperatures**
- **85 CRI**



**The Future of LED**


The explosion of performance growth within LED technology guarantees the availability of higher lumens-per-watt packages in the future. To address future retrofits of higher performing packages, Cooper Lighting has designed critical features into the module design to allow for simple physical replacement of the module.



**Plug-N-Play Connectors**  
Plug-N-Play quick disconnects offer safe and simple snap together wiring for simple service in the field.



**Serialized Modules**  
Each module carries a bar code or serial number that offers traceability to every component to ensure an identical color match for future replacements.



**Simple Removal/Replacement**  
The ALM module has been designed to be easily removed with standard hardware so that any maintenance person can easily service in the field.



Linear Prismatic Lens - WL (R3 shown)



Rectangular Perf Inlay - WG (Z3 shown)



Nano Prism Lens - WN (Z3 shown)



Round Perf Inlay - WD (R3 shown)

**ORDERING INFORMATION:**  
**SAMPLE NUMBER: ZM-WL-2L30-1C-120-11-G1**

<b>SERIES</b>	R3=Class R3 Series Recessed (2x2, 1x2) RM=Class RM Series Recessed (1x1) Z3=Class Z3 Series Recessed (2x2, 1x2) ZM=Class ZM Series Recessed (1x1)	
<b>REFLECTOR</b>	W=White	
<b>SHIELDING</b>	D=Round Perf Inlay G=Rectangular Perf Inlay L=Linear Prismatic Lens N=Nano Prism Lens	
<b>LIGHT LEVELS</b>	1=Light Level 1 ** (R3/Z3 only) 2=Light Level 2 **	
<b>LAMP TYPE</b>	L30=LED 3000K L35=LED 3500K L40=LED 4000K	
<b>NUMBER OF CIRCUITS*</b>	1=1 Circuit	
<b>WIRING</b>	C=Standard Circuit B=Battery* D=Dimming*	E=Emergency* Y=Daylight* T=Nightlight*
<b>VOLTAGE</b>	120=120V 277=277V 347=347V* UNV=Universal (120V-277V)	
<b>SIZE</b>	22=2'x2' (R3/Z3 only) 12=1'x2' (R3/Z3 only) 11=1'x1' (RM/ZM only)	
<b>CEILING TYPE</b>	T1=1" Grid, Slot-Grid, 9/16" Tegular (R3/Z3 only) T9=9/16" Grid (R3/Z3 only) CC=CC-Concealed Ceiling mount, Corelite provides special mounting bracket. G1=G1-Grid ceiling mount, requires additional mounting hardware by others. (RM/ZM only)	
<b>OPTIONS*</b>	AR=Air Return CP=Chicago Plenum NY=New York City Construction	AM=Anti-Microbial Coating W6=6' Whip Flex W12=12' Whip Flex

\*\* 2x2 - Light Level 1 = 2740 lms, Light Level 2 = 3480 lms  
 \*\* 1x2 - Light Level 1 = 2550 lms, Light Level 2 = 3300 lms  
 \*\* 1x1 - Light Level 2 = 1400 lms (approximate lumens)

PROJECT NAME: \_\_\_\_\_ TYPE: \_\_\_\_\_

CATALOG #: \_\_\_\_\_  
\* Not all options available. Please consult your Cooper Lighting Representative for availability and technical information. Specifications and dimensions subject to change without notice.