


BCLED
LED Wall Bracket

Metalux

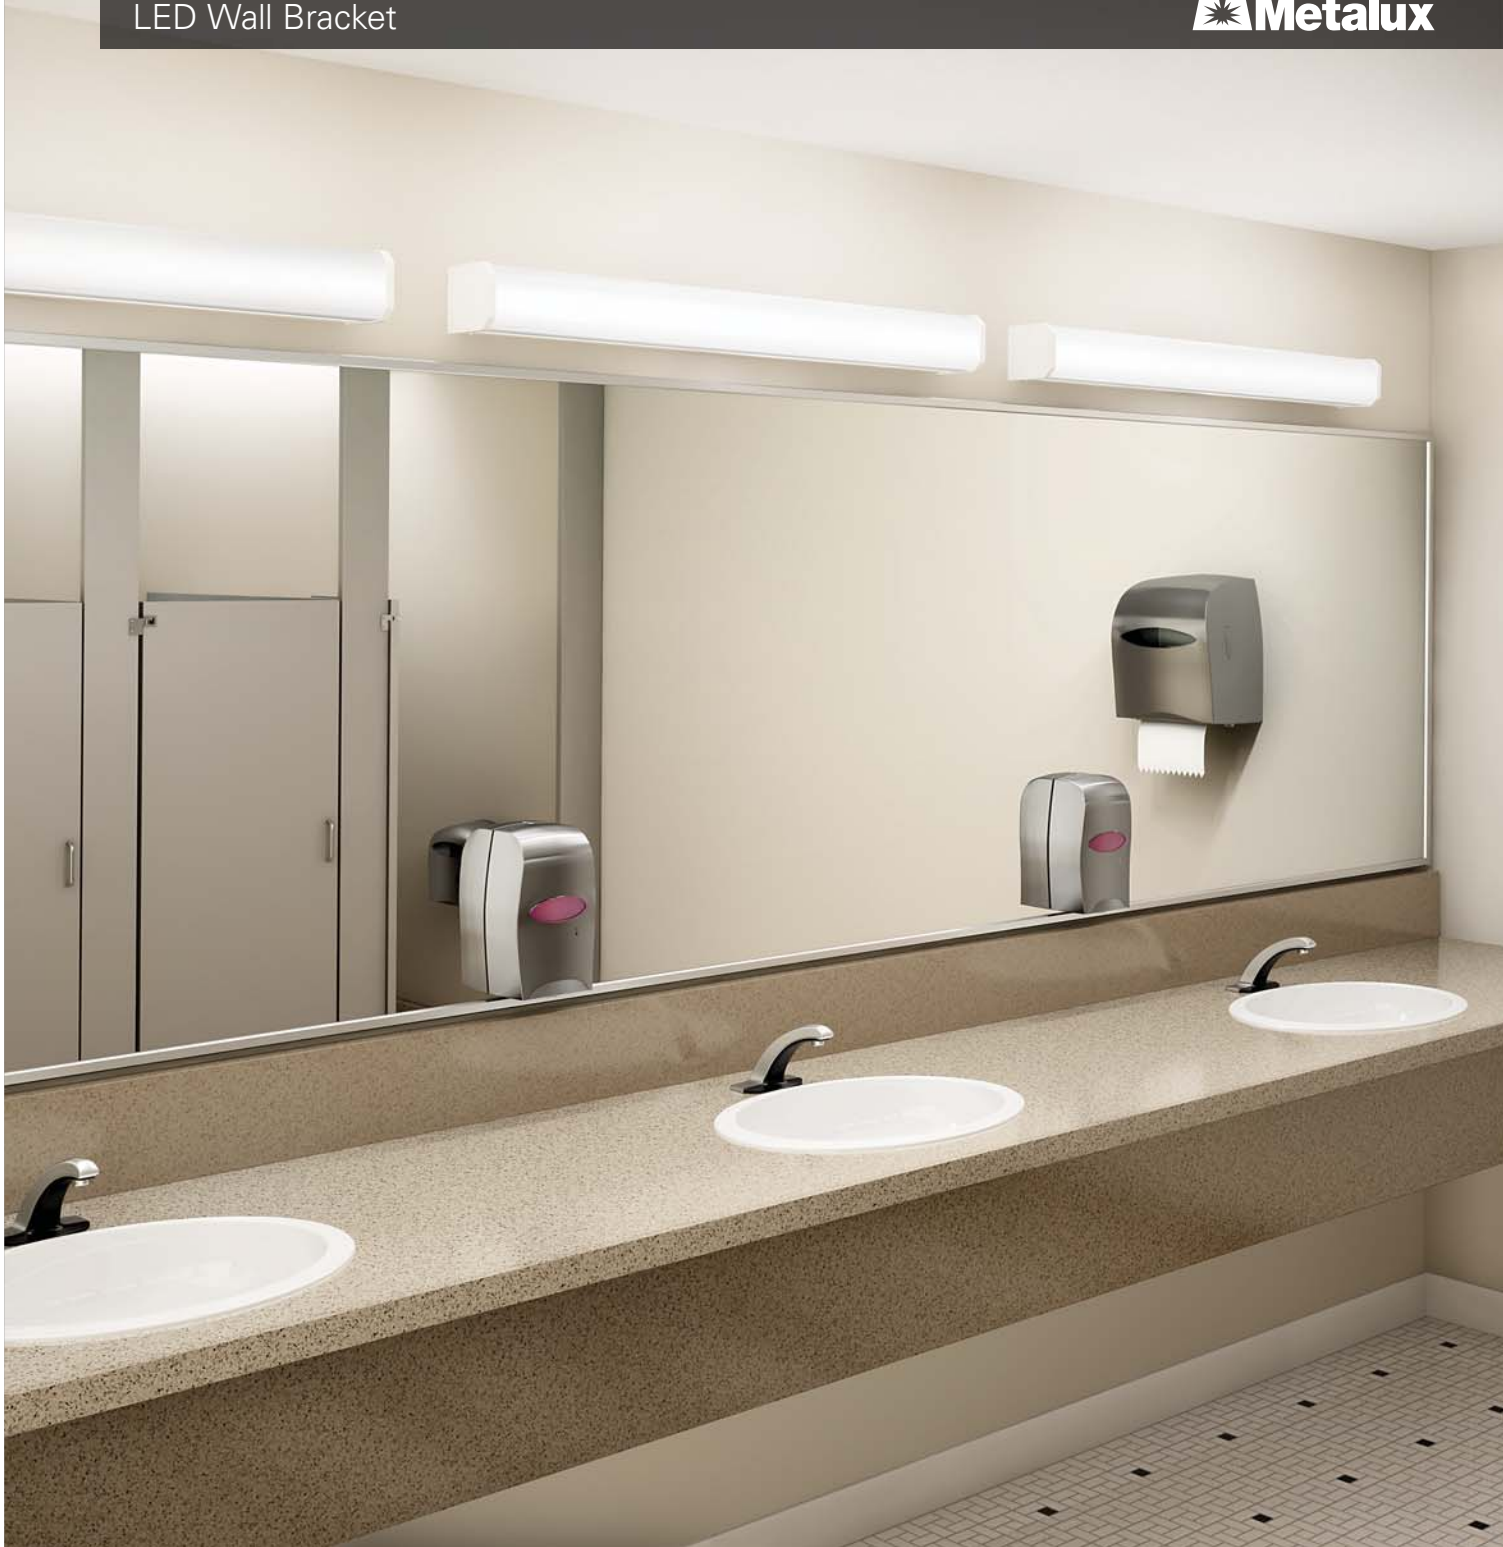

EATON

Powering Business Worldwide



Metalux's **BCLED** is a versatile LED ceiling and wall mount series which can be used in a broad range of commercial and industrial applications. This series provides customers with a high quality luminaire utilizing the latest LED, solid state lighting and electronic driver technology for optimal performance and maximized energy efficiency. With a traditional opal white lens, the BCLED produces a 180 degree, uniform light distribution and is a perfect alternative to traditional fluorescent solutions.

Construction

- Ceiling and Wall: 4 ft. and 2 ft.
- Depth: 4.25"
- Sustainable materials
- cULus, damp location rated
- ROHS compliant
- Five-year warranty

Performance

- Smooth, frost lens offers even illumination
- Excellent performance, ranging up to 98 lm/W
- Energy savings in excess of 30% compared to traditional fluorescent products
- Three Correlated Color Temperatures (3000K, 3500K and 4000K)
- 4 ft.: L70 @ 60,000 hrs.,
2 ft.: L70 @ 60,000 hrs.
- Binning: Per ANSI, 3-step MacAdam ellipse

Options

- 12 - MTO lumen packages in three different CCTs
- 0 to 10V dimmable driver (standard) with optional DALI solutions
- Emergency – EL (700), EL10W (10 Watts) and EL14 (1400)
- Convenience outlet is available
- Fuse options available

Controls

- BCLED includes 0-10V (analog) dimming for control using wall dimmers, Greengate Room Controllers, occupancy and/or daylight sensors and lighting controls panels from Eaton.
- BCLED is available with native Fifth Light DALI drivers for complete digital energy management using the capable and scalable Fifth Light controllers and software.





Innovation you can rely on™

Ordering Information

Sample Number: 4BCLED-LD4-40SL-F-UNV-L835-CD1-U

Rating	Width	Series	LED Type	LED Lumens Output ³			Shielding	
[Blank]=Standard	2=2 ft. Width 4=4 ft. Width	BCLED=LED Wall Bracket	LD4=LED 4.0	8SL=800 Lumens ⁵ 16SL=1600 Lumens ⁵ 20SL=2000 Lumens ⁵ 24HL=2400 Lumens ⁵	28HL=2800 Lumens ⁵ 28SL=2800 Lumens ⁷ 32SL=3200 Lumens ⁵ 36SL=3600 Lumens ⁵	40SL=4000 Lumens ⁵ 44HL=4400 Lumens ⁵ 48HL=4800 Lumens ⁵	F=Frost Acrylic (standard)	
Voltage ¹		Options			Driver Type			
347V=347 Volt 480V=480 Volt UNV=Universal Voltage 120-277 ² UNC=Universal Voltage 347/480 ⁷		GL=Single Element Fuse GM=Double Element Fuse Emergency ⁶ EL7W=7-watt, 120V-277V emergency battery pack installed ⁴ EL14W=14-watt 120V-277V emergency battery pack installed ⁴			CCT L830=3000K L835=3500K L840=4000K			CD=0-10V Dimming Driver SD=Step-dim Driver (Bi Level) ^{7,8} 5LTD=Fifth Light (DALI) Driver ^{7,8}
Number of Drivers	Options	Packaging	Accessories (Order Separately)					
1=1 Driver	CO=Convenience Outlet (120V only) RS1=Rotary Switch (1 Circuit, 120V only) PS1=Pull Switch (1 Circuit)	U=Unit Pack	AVC-Chain/Set=36" Chain Hanger (Use 1 Set Per Fixture) SCF=Fixed Stem Set (Specify Length) SCS=Swivel Stem Set (Specify Length) SCA=Adjustable 48" Stem Set A1B/Spacer-U=Spacer 1-1/2" to 2-1/2" from ceiling (Use 2 Per Fixture)					

NOTES: 1. Products also available in non-US voltage and frequencies for international markets. 2. Not available when specifying emergencies, voltage must be specific. 3. Nominal lumen output. 4. With integral test switch/indicator/laser test. For approximate delivered lumens multiply the lumens per watt of the desired fixture by the wattage of the emergency battery pack (100 lm/W x 7=700 lumens). IES-format photometry for luminaire under emergency operation available. 5. 2 ft. model. 6. No integral emergency for 2 ft. models. 7. Only available in 4 ft. models. 8. Step dim and DALI only available in 3600, 4000, 4400 and 4800 lumen packages.

Specifications & dimensions subject to change without notice. Consult your Eaton Representative for availability and ordering information.

Photometrics

BCLED 4', 3000 Lumens	BCLED 4', 4000 Lumens
<p>Electronic Driver Linear LED 3500K Spacing criterion: (II) 1.3 x mtg height, (L) 1.4 x mtg height Lumens = 3171 Input Watts = 32.5W Efficacy = 97.6 lm/W Test: 4BCLED-LD4-32SL-F-UNV-L835-CD1-U.IES</p>	<p>Electronic Driver Linear LED 3500K Spacing criterion: (II) 1.3 x mtg height, (L) 1.4 x mtg height Lumens = 3990 Input Watts = 42.5W Efficacy = 93.9 lm/W Test: 4BCLED-LD4-40SL-F-UNV-L835-CD1-U.IES</p>

2' Lumen Maintenance		
Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (Hours)
35°C	> 86%	165,000

4' Lumen Maintenance		
Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (Hours)
35°C	> 91%	169,000

Certification Data			
cULus - Damp Location	LM79/LM80 Compliant	ROHS Compliant	NOM Compliant

**Our Lighting
Product Lines**

Halo
Halo Commercial
Portfolio
Iris
RSA
Metalux
Corelite
Neo-Ray
Fail-Safe
MWS
Ametrix
Shaper
io
Lumark
McGraw-Edison
Invue
Lumière
Streetworks
AtLite
Sure-Lites

**Our Controls
Product Lines**

Greengate
iLumin
Zero 88
Fifth Light Technology
iLight (International Only)

Eaton
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172



© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. BR519008EN
November 18, 2015

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Product availability, specifications,
and compliances are subject to
change without notice.