

The Possibilities of Light



STRAIGHT & NARROW
GENERATION II

STRAIGHT & NARROW GEN II

Based on the success of the Straight & Narrow family of products the second generation offers the following **ENHANCEMENTS**

QUALITY

Fully extruded single piece housing offers precise in-line appearance and enhanced rigidity

PERFORMANCE

Increased fixture efficiency

CONTRACTOR FRIENDLY

Pre-installed light trays for ease of a quality installation and a unique joiner assembly for a seamless appearance

CONTINUOUS LIGHT

Staggered lamping throughout minimizing socket shadow

DIFFUSERS

New flush and regressed white acrylic lay-in lenses for a clean trimless appearance and easy maintenance

SHIELDING

Unique snap-in louver design for easy installation and enhanced retention


ADAPTABILITY

Continuous runs provided to the nearest foot


SHIELDING




S90/S91
High Performance
Parabolic Louver

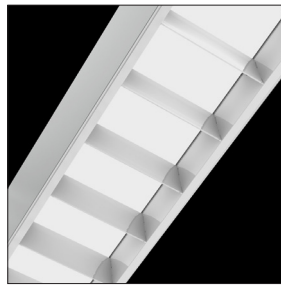


S90P/S91P
High Performance Parabolic
Louver with Acrylic Overlay

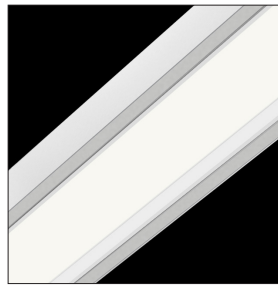

S22R/S23R
Co-Extruded
Regressed Lens
60% Transmission

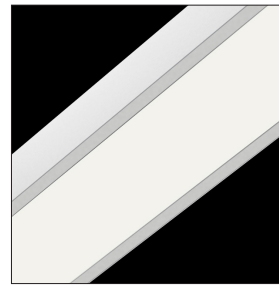


S92/S93
Flush Acrylic Lens
60% Transmission

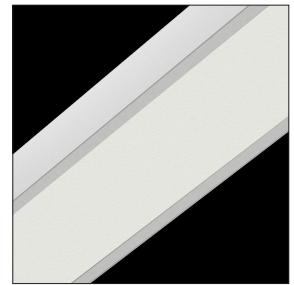


S92HT/S93HT
Flush Acrylic
High Transmission Lens
87% Transmission


CORNER OPTIONS

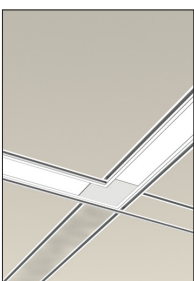

22DR
Unlit Corner

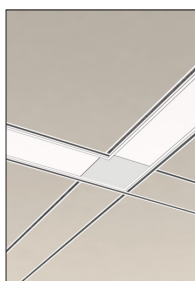

23DR
Unlit Corner

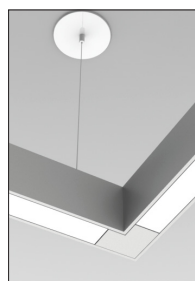

22DP
Unlit Corner




23DP
Unlit Corner


MR-16 DOWNLIGHT



23DR
Beginning of Run/
End of Run




23DS/DP/DW
Beginning of Run/
End of Run



23DR
Middle of Run

RECESSED


22 DR



Direct Recessed
 Width: 2 3/8" (aluminum extruded housing)
 No. of Lamps: 1
 Lamp Types: T5 or T5HO staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

SUSPENDED

22 DP



Direct Pendant
 Width: 2 3/8" (aluminum extruded housing)
 No. of Lamps: 1
 Lamp Types: T5 or T5HO staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

WALL MOUNT

22 DW



Direct Wall
 Width: 2 3/8" (aluminum extruded housing)
 No. of Lamps: 1
 Lamp Types: T5 or T5HO staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay


SURFACE

22 DS



Surface Direct
 Width: 2 3/8" (aluminum extruded housing)
 No. of Lamps: 1
 Lamp Types: T5 or T5HO staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

23 DR



Direct Recessed
 Width: 4" (aluminum extruded housing)
 No. of Lamps: 1 or 2
 Lamp Types: T5, T5HO or T8 staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

23 DP



Direct Pendant
 Width: 4" (aluminum extruded housing)
 No. of Lamps: 1 or 2
 Lamp Types: T5, T5HO or T8 staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

23 DW



Direct Wall
 Width: 4" (aluminum extruded housing)
 No. of Lamps: 1 or 2
 Lamp Types: T5, T5HO or T8 staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

23 DS




Surface Direct
 Width: 4" (aluminum extruded housing)
 No. of Lamps: 1 or 2
 Lamp Types: T5, T5HO or T8 staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

23 XR



Direct Recessed Wallwasher
 Width: 4" (steel housing)
 No. of Lamps: 1
 Lamp Types: T5 or T5HO
 Shielding: none
 All white trim and kicker plate

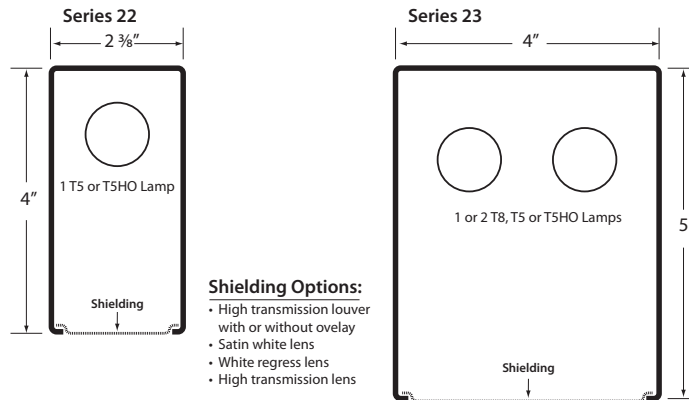

DIRECT-INDIRECT (Currently Generation I)

22 DIP



Direct-Indirect Pendant
 Width: 2 3/8" (aluminum extruded housing)
 No. of Lamps: 1
 Lamp Types: T5 or T5HO
 Shielding: Flush lens, high performance louver with or without overlay

23 DIP



Direct-Indirect Pendant
 Width: 4" (aluminum extruded housing)
 No. of Lamps: 1 or 2
 Lamp Types: T5, T5HO or T8 staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

22 DIW



Direct-Indirect Wall
 Width: 2 3/8" (aluminum extruded housing)
 No. of Lamps: 1
 Lamp Types: T5 or T5HO
 Shielding: Flush lens, high performance louver with or without overlay

23 DIW



Direct-Indirect Wall
 Width: 4" (aluminum extruded housing)
 No. of Lamps: 1 or 2
 Lamp Types: T5, T5HO or T8 staggered
 Shielding: Flush lens, high transmission lens, regress lens or high performance louver with or without overlay

Cooper Lighting

Customer First Center
1121 Highway 74 South
Peachtree City, GA 30269

P: 770-486-4800
F: 770-486-4801
www.cooperlighting.com

Neo-Ray

100 Andrews Road
Hicksville, NY 11801

P: 516-470-1000
F: 516-470-1077

International Sales, USA

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269

P: 770-486-4800
F: 770-486-4801

Canada

Cooper Lighting
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8

P: 905-507-4000
F: 905-568-7049

The Cooper Lighting Family

Halo
Metalux
Lumark
Sure-Lites
Neo-Ray
AtLite
Corelite
Portfolio
Iris
Shaper
io
Lumière
Invue
McGraw-Edison
Streetworks
Fail-Safe
PDS
MWS
RSA
Ametrix

Domestic Facilities

Cranbury, New Jersey
Hicksville, New York
Elk Grove Village, Illinois
Irving, Texas
Ontario, California
Peachtree City, Georgia

Canadian Facilities

Calgary, Alberta T2E 7V9
Mississauga, Ontario L5R 1B8

Cooper Industries, Ltd.
600 Travis, Ste. 5800
Houston, TX 77002-1001
P: 713-209-8400
www.cooperindustries.com