



Quick Ship

Made To Order

Quick Ship Brochure



Quick Ship

Made To Order

neoray™

FIXTURES IN A FLASH IS WHAT IT'S ALL ABOUT!

The Neoray Quick Ship Program has been designed to offer some of our most popular Neoray Products in 5-15 day shipping windows to facilitate short lead time projects while never having to accept a lesser product.

AVAILABLE PRODUCTS

Architectural Recessed

202/204	5 Days
222	5 Days
232	10 Days
242/244	5 Days
272/274	10 Days
7A	10 Days


Perimeter

79PF	10 Days
76	10 Days
74IC	5 Days

PROGRAM GUIDELINES

- Quick Ship window is from date of released order to manufacturing (signed drawings only required for continuous runs)
- Place QS-in front of eligible products standard SKU number (detailed nomenclature enclosed)
- Standard architectural white finish only
- Emergency Battery Packs available with no additional lead times¹
- Quick Ship Cove Perimeter products not available in corner applications
- UNV ballasts only
- Normal Shipping policies apply
- Individual linear and perimeter orders that exceed 400' and recessed orders in excess of 100 luminaires may extend lead times. Neoray will make all efforts to maintain long run quantity orders within our quick ship window. For longer run orders, consult factory for a committed shipping window
- Minimum order value is \$1000.00

NOTES: 1 Standard battery pack lumens: up to 500 lumens for T8, Biax and T5. Up to 800 lumens for T5HO.

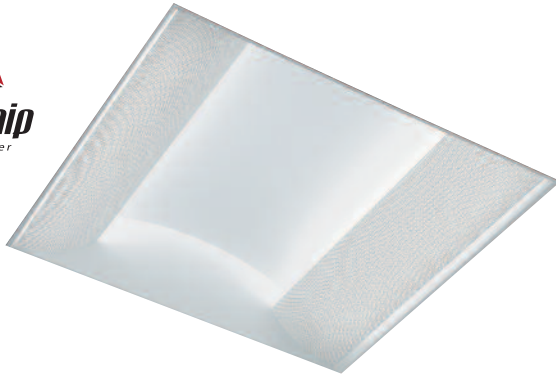

FENESTRA 202/204



- 2' x 2' & 2' x 4' Side Basket
- T5, T5HO or 40W Biax Lamps

ORDERING INFORMATION


SERIES 202=2' x 2' 204=2' x 4'	MOUNTING R=Recessed	NUMBER OF LAMPS (Not Included) 2=2 Lamps	LAMP TYPE T5 T5HO BX40W (2x2)	CEILING TYPE ETG=15/16" Exposed T-Grid STG=Slot T-Grid	VOLTAGE U=Universal Voltage	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching	EMERGENCY EM=Emergency Pack ¹
---	-------------------------------	--	---	---	---------------------------------------	--	---	--

For flexible whip, please include the following on a separate line item, with appropriate quantities:

DESCRIPTION	CATALOG NUMBER
Flexible Whip, 120V, #14AWG	SW120-6-001
Flexible Whip, 277V, #14AWG	SW277-6-001

#3 Conductor (Black / White / Ground)

NOTES: 1 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens for Biax; up to 800 lumens for T5HO.

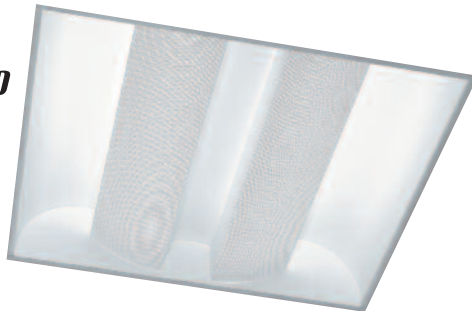

FENESTRA 222



- 2' x 2' Split Basket
- T5, T5HO or 40W Biax Lamps
- Static & Air Return

ORDERING INFORMATION

SERIES 222=2' x 2'	OPTIONS A=Air Return (leave blank for static)	MOUNTING R=Recessed	NUMBER OF LAMPS (Not Included) 2=2 Lamps	LAMP TYPE BX40W T5 T5HO	CEILING TYPE ETG=15/16" Exposed T-Grid STG=Slot T-Grid	VOLTAGE U=Universal Voltage	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching	EMERGENCY EM=Emergency Pack ¹
------------------------------	---	-------------------------------	--	---	---	---------------------------------------	--	---	--

For flexible whip, please include the following on a separate line item, with appropriate quantities:


DESCRIPTION	CATALOG NUMBER
Flexible Whip, 120V, #14AWG	SW120-6-001
Flexible Whip, 277V, #14AWG	SW277-6-001

#3 Conductor (Black / White / Ground)

NOTES: 1 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens.



FENESTRA 232

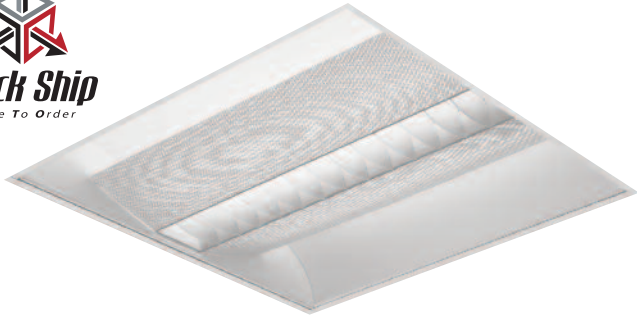

- 2' x 2' Split Basket
- T5, T5HO or 40W Biax Lamps
- Dual-level Switched Option

ORDERING INFORMATION

232	R	3			U	EB		
SERIES 232=2' x 2'	MOUNTING R=Recessed	NUMBER OF LAMPS (Not Included) 3=3 Lamps	LAMP TYPE BX40W T5 T5HO	CEILING TYPE ETG=15/16" Exposed T-Grid STG=Slot T-Grid	VOLTAGE U=Universal Voltage	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching DU=Dual Switching	EMERGENCY EM=Emergency Pack ¹

For flexible whip, please include the following on a separate line item, with appropriate quantities:


DESCRIPTION	CATALOG NUMBER
Flexible Whip, 120V, #14AWG	SW120-6-001
Flexible Whip, 277V, #14AWG	SW277-6-001

#3 Conductor (Black / White / Ground)

NOTES: 1 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens.



FENESTRA 242/244

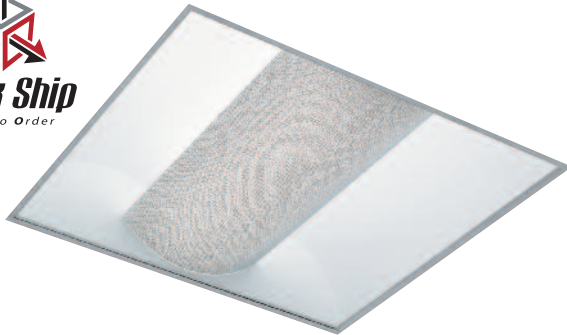

- 2' x 2' & 2' x 4' Center Basket
- T5, T5HO, T8 or 40W Biax Lamps
- Dual-level Switched 3T8 Option

ORDERING INFORMATION

	R				U	EB		
SERIES ¹ 242=2' x 2' 244=2' x 4'	MOUNTING R=Recessed	NUMBER OF LAMPS (Not Included) 2=2 Lamps 3=3 Lamps	LAMP TYPE BX40W T8 T5 T5HO	CEILING TYPE ETG=15/16" Exposed T-Grid STG=Slot T-Grid	VOLTAGE U=Universal Voltage	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching DU=Dual Switching	EMERGENCY EM=Emergency Pack ²

For flexible whip, please include the following on a separate line item, with appropriate quantities:

DESCRIPTION	CATALOG NUMBER
Flexible Whip, 120V, #14AWG	SW120-6-001
Flexible Whip, 277V, #14AWG	SW277-6-001

#3 Conductor (Black / White / Ground)

NOTES: 1 242 and 244 not available in 1 lamp configuration. 2 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens for T8, Biax.





FENESTRA 272/274



- 2' & 2' x 4' Narrow Center Basket
- T5, T5HO or 40W Biax Lamps

ORDERING INFORMATION

SERIES 272=2' x 2' 274=2' x 4'	R MOUNTING R=Recessed	NUMBER OF LAMPS (Not Included) 1=1 Lamp (BX40W) 2=2 Lamps (T5)	LAMP TYPE T5 T5HO BX40W ¹	CEILING TYPE ETG=15/16" Exposed T-Grid STG=Slot T-Grid	U VOLTAGE U=Universal Voltage	EB BALLAST EB=Electronic Ballast (Standard)	SI SWITCHING OPTIONS SI=Single Switching	EMERGENCY EM=Emergency Pack ²
---	---	--	--	---	--	---	---	--

For flexible whip, please include the following on a separate line item, with appropriate quantities:

DESCRIPTION	CATALOG NUMBER
Flexible Whip, 120V, #14AWG	SW120-6-001
Flexible Whip, 277V, #14AWG	SW277-6-001

#3 Conductor (Black / White / Ground)

NOTES: 1 BIAx lamp only in (1) lamp configurations for 272 and 274. 2 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens for Biax and T5



7A



- 2-1/4" Regressed Aluminum Extruded Frame
- 4' Individuals
- Frosted Acrylic Overlay
- T5, T5HO or T8 Lamps

ORDERING INFORMATION

7A	648	R				U	EB	SI		SP95
SERIES 7A=Recessed	FIXTURE SIZE 648=6" x 48"	MOUNTING R=Recessed	NUMBER OF LAMPS (Lamps Not Included) 1=1 Lamp (T5, T5HO) 2=2 Lamps (T8)	LAMP TYPE T8 T5 T5HO	CEILING TYPE STG=Slot T-Grid ETG=15/16" Exposed T-Grid	VOLTAGE U=Universal	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching	EMERGENCY EM=Emergency Pack ¹	SHIELDING OPTIONS SP95=AC1965B Frosted Acrylic

For flexible whip, please include the following on a separate line item, with appropriate quantities:

DESCRIPTION	CATALOG NUMBER
Flexible Whip, 120V, #14AWG	SW120-6-001
Flexible Whip, 277V, #14AWG	SW277-6-001

#3 Conductor (Black / White / Ground)

NOTES: 1 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens for T8 and T5; up to 800 lumens for T5HO.



79PF PERIMETER



- 3', 4', 6', 8' Units
- T5, T5HO, T8 Lamps
- Individual, Intermediate, Beginning & End-of-Row Fixtures


ORDERING INFORMATION

79PF					U	EB	SI	
SERIES 79PF=Pentaflex™	NUMBER OF LAMP (Not Included) 1=1 Lamp 2=2 Lamps	LAMP TYPE T8 T5 T5HO	FIXTURE LENGTH 8=8' 6=6' 4=4' 3=3'	FIXTURE LENGTH D=Individual B=Beginning of Run I=Intermediate E=End of Run	VOLTAGE U=Universal	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching	EMERGENCY EM=Emergency Pack 1

NOTES: 1 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens.



SERIES 76

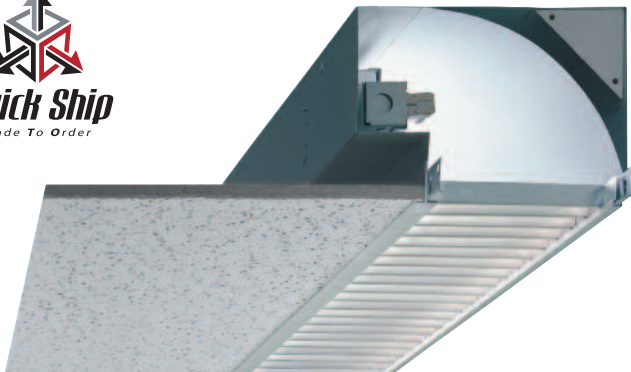

- T5, T5HO, T8 Lamps
- Three Shielding Types

ORDERING INFORMATION


76				U	EB	SI		
SERIES 76=Perimeter	NUMBER OF LAMP (Not Included) 1=1 Lamp 2=2 Lamps	LAMP TYPE T5 T5HO T8	RUN LENGTH Overall Nominal Run Length __ft.	VOLTAGE U=Universal	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching	EMERGENCY EM=Emergency Pack 1	SHIELDING OPTIONS S58=KSH-12 Clear Acrylic S72=Bold Baffle S79=Parabolic Baffle

NOTES: 1 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens.





SERIES 74IC

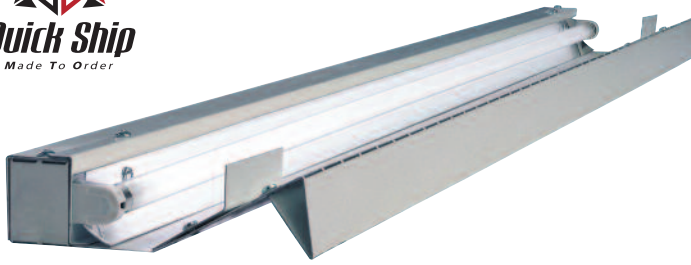

- T5, T5HO, and T8 lamps
- Compact 3" x 8" cross-section
 - 3', 4', 6', or 8' lengths
- Uniform indirect illumination

ORDERING INFORMATION

74IC	I	C				U	EB		
SERIES 74=Cove™	LIGHT OUTPUT I=Indirect	MOUNTING C=Cove	NUMBER OF LAMPS (Per Cross Section) 1=1 Lamp 2=2 Lamps	LAMP TYPE T8 T5 T5HO	RUN LENGTH Overall Nominal Run ___ ft.	VOLTAGE U=Universal	BALLAST EB=Electronic Ballast (Standard)	SWITCHING OPTIONS SI=Single Switching	EMERGENCY OPTIONS EM=Emergency Pack 1

NOTES: 1 Standard EM pack (1) lamp 90 minute operation, up to 500 lumens.



Cooper Lighting

Customer First Center
1121 Highway 74 South
Peachtree City, GA 30269

P: 770-486-4800
F: 770-486-4801
www.cooperlighting.com

Neo-Ray

100 Andrews Road
Hicksville, NY 11801

P: 516-470-1000
F: 516-470-1077

International Sales, USA

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269

P: 770-486-4800
F: 770-486-4801

Canada

Cooper Lighting
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8

P: 905-501-3000
F: 905-501-3172

The Cooper Lighting Family

Halo
Metalux
Lumark
Sure-Lites
Neo-Ray
AtLite
Corelite
Portfolio
Iris
Shaper
io
Lumière
Invue
McGraw-Edison
Streetworks
Fail-Safe
PDS
MWS
RSA
Ametrix

Domestic Facilities

Cranbury, New Jersey
Hicksville, New York
Elk Grove Village, Illinois
Irving, Texas
Ontario, California
Peachtree City, Georgia

Canadian Facilities

Calgary, Alberta T2E 7V9
Mississauga, Ontario L5R 1B8

Cooper Industries, Ltd.
600 Travis, Ste. 5800
Houston, TX 77002-1001
P: 713-209-8400
www.cooperindustries.com