

J

Wallplates



	Page		Page
REPEL Wallplates	J-1	Oversize Wallplates	J-17
Wallplate Dimensional Information	J-2	Toggle Switch	J-17
Mounting Holes	J-2	Decorator	J-17
Plate and Cover Openings	J-2	Duplex Receptacle	J-17
Wallplate Sizes	J-3	Single Receptacle	J-17
Standard Size Wallplates	J-4	Blank - Box Mounted	J-18
Toggle Switch	J-4	Combination 2-Gang	J-18
Duplex Receptacle	J-5	Telephone & Coax	J-18
Single Receptacle	J-5	Accessories	J-18
Decorator	J-6	LED Accent Lights	J-19
Blank - Box Mounted	J-7	Vertical Louvered Faceplate	J-20
Louver	J-7	Vertical Scoop Faceplate With Push Button Switch	J-20
Telephone & Coax	J-8	Vertical Scoop Faceplate	J-20
Combination 2-Gang	J-8	Horizontal Louvered Faceplate	J-20
Combination 3-Gang	J-8	Specification Information	J-21
Combination 4-Gang	J-9		
Power Outlet	J-9		
Standard Size Wallplate Guide for Power Devices	J-9		
Extra Depth	J-10		
Pre-Marked Special Use	J-10		
Mid-Size Wallplates	J-11		
Toggle Switch	J-11		
Duplex Receptacle	J-11		
Single Receptacle	J-12		
Decorator	J-12		
Screwless Decorator	J-13		
Screwless Toggle	J-13		
Screwless Receptacle	J-13		
Blank - Box & Strap Mounted	J-14		
Telephone & Coax	J-14		
Combination 2-Gang	J-15		
Combination 3-Gang	J-15		
Power Outlet	J-15		
Mid-Size Wallplate Guide for Power Devices	J-15		
Sectional Wallplates	J-16		
Pre-Marked Special Use	J-16		

Rugged design and quality materials make Arrow Hart wallplates the best choice

Whether faced with a commercial, institutional or industrial setting, you will find the desired material, configuration, style, size and color you need.



Standard Size wallplates for precision cuts



Mid-Size and Oversize wallplates for applications that require additional wall coverage



Extra Depth wallplates to provide a flush fit to the wall when an old work outlet box is used



Specification Grade Thermoplastic

- Available in both Nylon and Polycarbonate constructions
- Virtually unbreakable plates reduce installation and replacement costs
- Preferred for industrial, institutional, and other high-traffic areas
- Exclusive timesaving Screw-Catch™ feature holds mounting screws captive and simplifies installation
- High gloss finish is soil-resistant
- Available in Standard Size and Mid-Size configurations with screwless and Pre-Marked Special Use versions available



Specification Grade Metal Wallplates

- Constructed of non-corrosive 302/304 Stainless Steel, Brass, or Chrome
- Solid brass is coated with transparent lacquer to resist premature oxidation
- Available in Standard, Mid-Size, and Oversize configurations with Pre-Marked Special Use versions available
- Shipped with removable protective film
- 302/304 Stainless is non-magnetic and non-corrosive for rugged durability
- Recommended for industrial, institutional, and commercial applications

REPEL Wallplates

Arrow Hart's REPEL Wallplates are the first of their kind with Agion® Additive



REPEL offers built-in product protection



Stainless Steel

Wallplates feature a powder coating that incorporates Agion® Silver Antimicrobial Additive



Polycarbonate

Wallplates incorporate Agion® Silver Antimicrobial additive into the plate material

REPEL switches are also available. See section D for ordering information.



REPEL wallplates are perfect for:

- Healthcare Facilities
- Schools, Classrooms, and Dormitories
- Assisted Living Facilities
- Food Service Areas
- Industrial Facilities
- Commercial Office Space
- Retail Common Areas

NOTE: REPEL products do not protect the user against disease causing organisms and ongoing regular cleaning practices should be maintained. Agion is a registered trademark of Agion Technologies, Inc., Wakefield, MA.

Mounting Holes for Wallplates and Covers

These are the most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.


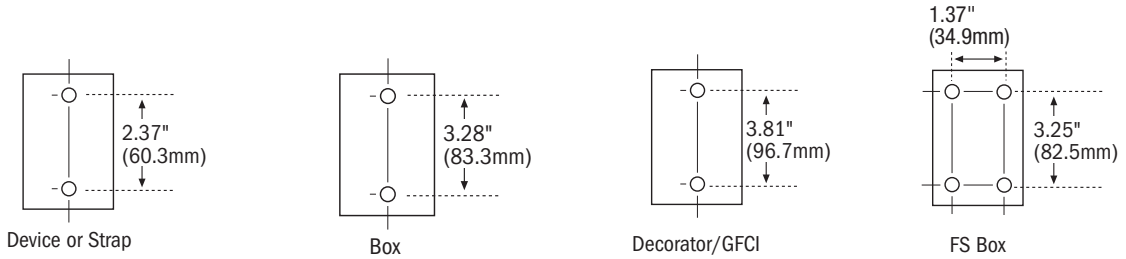



Plate and Cover Opening Dimensions

Cover Openings

Nominal dimensions for plate and cover openings conform to industry standards and practices.

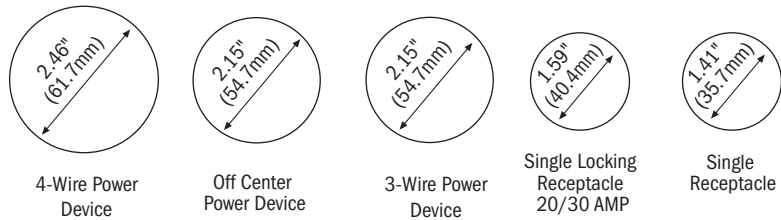



Common Opening Configurations

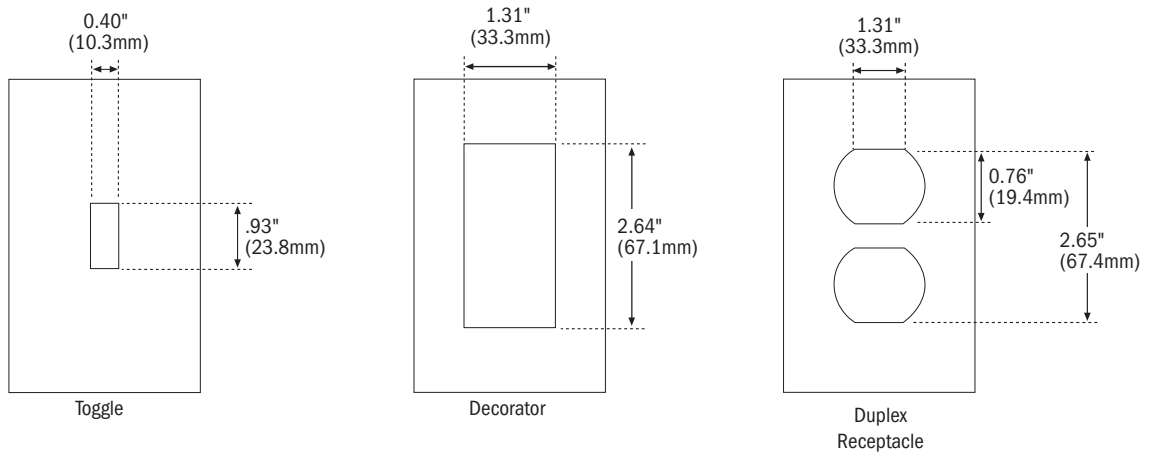

Wallplate Sizes

Description		Height	Width	First Gang to Edge	Gang to Gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (69.8mm)	1.37" (34.9mm)	—
	Mid-Size	4.87" (123.8mm)	3.12" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.3mm)	3.50" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.4mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.1mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)

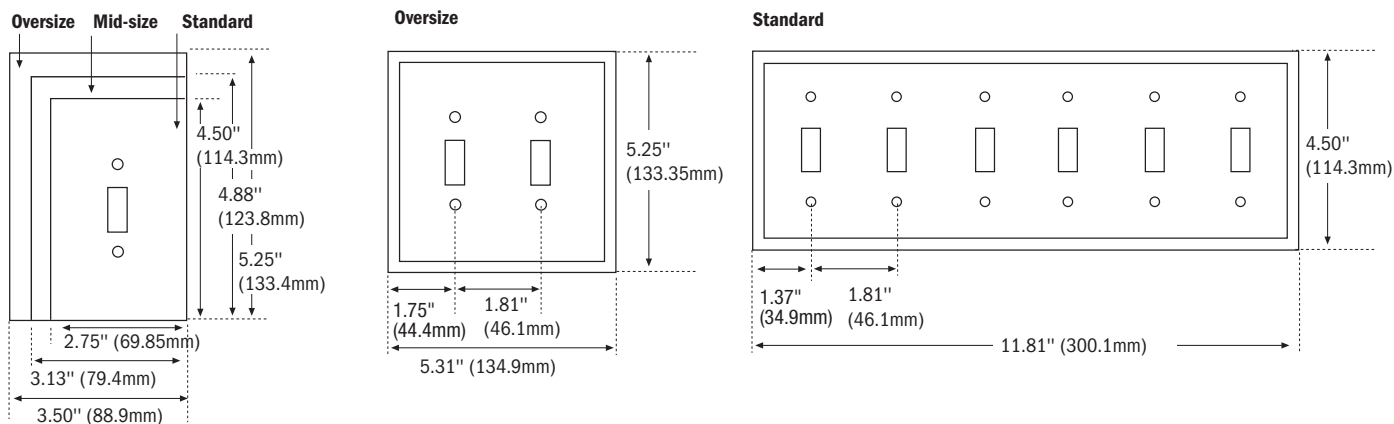

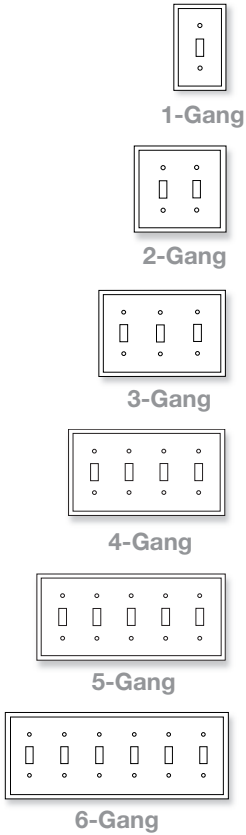

Toggle Switch

Description	Material	Catalog No.	Colors		
1-Gang Toggle	Nylon	□ 5134__	A, B, BK, GY, LA, RD, V, W		•
	Thermoset	□ 2134__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93071	—		•
	REPEL, 302/304 Stainless Steel	□ 93071AM	—	•	•
2-Gang Toggle	Nylon	□ 5139__	A, B, BK, GY, LA, RD, V, W		•
	Thermoset	□ 2139__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93072	—		•
	REPEL, 302/304 Stainless Steel	□ 93072AM	—	•	•
3-Gang Toggle	Nylon	□ 5141__	A, B, BK, GY, LA, V, W		•
	Thermoset	□ 2141__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93073	—		•
	REPEL 302/304, Stainless Steel	□ 93073AM	—	•	•
4-Gang Toggle	Nylon	□ 5154__	A, B, BK, GY, LA, V, W		•
	Thermoset	□ 2154__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93074	—		•
	REPEL 302/304 Stainless Steel	□ 93074AM	—	•	•
5-Gang Toggle	Thermoset	□ 2155__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93075	—		•
6-Gang Toggle	Thermoset	□ 2156__	A, B, V, W		•
	302/304 Stainless Steel	□ 93076	—		•

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

- NAFTA Compliant - see page O-30
- REPEL Wallplates - see page J-1



Certifications

2000 series wallplates are cULus certified
 5000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21

Duplex Receptacle


Description	Material	Catalog No.	Colors		
1-Gang Duplex	Nylon	□ 5132__	A, B, BK, GY, LA, RD, V, W		•
	Thermoset	□ 2132__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93101	—		•
	REPEL 302/304 Stainless Steel	□ 93101AM	—	•	•
	Brass	□ 94101	—		•
2-Gang Duplex	Nylon	□ 5150__	A, B, BK, GY, LA, RD, V, W		•
	Thermoset	□ 2150__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93102	—		•
	REPEL 302/304 Stainless Steel	□ 93102AM	—	•	•
	Brass	□ 94102	—		•
3-Gang Duplex	302/304 Stainless Steel	□ 93103	—		•
	REPEL, 302/304 Stainless Steel	□ 93103AM	—	•	•



1-Gang





2-Gang



3-Gang

Single Receptacle

Description	Material	Catalog No.	Colors		
1-Gang Single Receptacle with 1.406" (35.712mm) Hole	Nylon	□ 5131__	A, B, BK, GY, LA, V, W		•
	Thermoset	□ 2131__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93091	—		•
	REPEL, 302/304 Stainless Steel	□ 93091AM	—	•	•
	Brass	□ 94091	—		•





1-Gang

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key


-  NAFTA Compliant - see page O-30
-  REPEL Wallplates - see page J-1

Certifications

2000 series wallplates are cULus certified
 5000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21

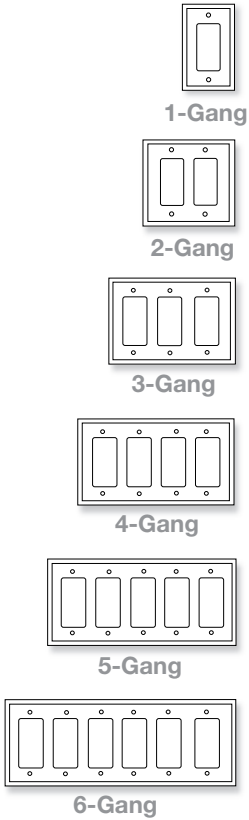

Decorator

Description	Material	Catalog No.	Colors		
1-Gang Decorator	Nylon	<input type="checkbox"/> 5151 __	A, B, BL, BK, GY, LA, RD, V, W		•
	Thermoset	<input type="checkbox"/> 2151 __	A, B, BK, GY, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93401	—		•
	REPEL, 302/304 Stainless Steel	<input type="checkbox"/> 93401AM	—	•	•
2-Gang Decorator	Nylon	<input type="checkbox"/> 5152 __	A, B, BK, GY, LA, V, W		•
	Thermoset	<input type="checkbox"/> 2152 __	A, B, BK, GY, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93402	—		•
	REPEL, 302/304 Stainless Steel	<input type="checkbox"/> 93402AM	—	•	•
3-Gang Decorator	Nylon	<input type="checkbox"/> 5153 __	A, B, BK, GY, LA, V, W		•
	Thermoset	<input type="checkbox"/> 2153 __	A, B, BK, GY, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93403	—		•
	REPEL, 302/304 Stainless Steel	<input type="checkbox"/> 93403AM	—	•	•
4-Gang Decorator	Nylon	<input type="checkbox"/> 5154 __	A, B, BK, GY, LA, V, W		•
	Thermoset	<input type="checkbox"/> 2154 __	A, B, BK, GY, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93404	—		•
	REPEL, 302/304 Stainless Steel	<input type="checkbox"/> 93404AM	—	•	•
5-Gang Decorator	Thermoset	<input type="checkbox"/> 2155 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93405	—		•
6-Gang Decorator	Thermoset	<input type="checkbox"/> 2156 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93406	—		•

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key



- NAFTA Compliant - see page O-30
- REPEL Wallplates - see page J-1

Certifications

2000 series wallplates are cULus certified
 5000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified


Specification Information:
 Wallplates: J-21

Blank - Box Mounted


Description	Material	Catalog No.	Colors		
1-Gang	Nylon	□ 5129__	A, B, BK, GY, LA, V, W		•
	Thermoset	□ 2129__	A, B, LA, V, W		•
	302/304 Stainless Steel	□ 93151	—		•
	REPEL, 302/304 Stainless Steel	□ 93151AM	—	•	•
	Brass	□ 94151	—		•
2-Gang	Nylon	□ 5137__	A, B, BK, GY, LA, V, W		•
	Thermoset	□ 2137__	A, B, LA, V, W		•
	302/304 Stainless Steel,	□ 93152	—		•
	REPEL, 302/304 Stainless Steel	□ 93152AM	—	•	•
3-Gang	302/304 Stainless Steel	□ 93153	—		•
	REPEL, 302/304, Stainless Steel	□ 93153AM	—	•	•
4-Gang	302/304 Stainless Steel	□ 93154	—		•
	REPEL, 302/304 Stainless Steel	□ 93154AM	—	•	•




1-Gang



2-Gang





3-Gang



4-Gang

Louver

Description	Material	Catalog No.	
Horizontal	302/304 Stainless Steel	□ 93630	•
Vertical	302/304 Stainless Steel	□ 93631	•



93630





93631

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

-  NAFTA Compliant - see page O-30
-  REPEL Wallplates - see page J-1

Certifications

2000 series wallplates are cULus certified
 5000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21



1-Gang,
0.375"
Hole



1-Gang,
0.625"
Hole



2-Gang, Toggle
& Single Receptacle



2-Gang, Toggle
& Duplex Receptacle



2-Gang, Toggle &
Decorator




2-Gang, Toggle & Blank




2-Gang, Duplex
Receptacle & Blank



2-Gang, Duplex
Receptacle & Decorator



3-Gang, 2 Toggles &
Duplex Receptacle



3-Gang, 2 Toggles &
Decorator

Specification Information:

Wallplates: J-21

Telephone & Coax

Description	Material	Catalog No.	Colors	
1-Gang with 0.375" (9.525mm) Hole	Nylon	□ 5128__	B, GY, V, W	•
	Thermoset	□ 2128__	A, B, LA, V, W	•
	302/304 Stainless Steel	□ 93696		•
1-Gang with 0.625" (15.875mm) Hole	Nylon	□ 5159__	B, GY, V, W	•
	Thermoset	□ 2159__	A, B, V, W	•
	302/304 Stainless Steel	□ 93591	-	•

Combination 2-Gang

Description	Material	Catalog No.	Colors	
Toggle & Single Receptacle	302/304 Stainless Steel	□ 93512	—	•
Toggle & Duplex Receptacle	Nylon	□ 5138__	A, B, BK, GY, LA, V, W	•
	Thermoset	□ 2138__	A, B, GY, LA, V, W	•
	302/304 Stainless Steel	□ 93532	—	•
Toggle & Decorator	Brass	□ 94532	—	•
	Nylon	□ 5153__	A, B, BK, GY, LA, V, W	•
	Thermoset	□ 2153__	A, B, LA, V, W	•
	302/304 Stainless Steel	□ 93432	—	•
Toggle & Blank	Nylon	□ 5171__	A, B, BK, LA, V	•
Duplex Receptacle & Blank	Nylon	□ 5170__	A, B, BK, LA, V	•
Duplex Receptacle & Decorator	Thermoset	□ 2157__	A, LA, V, W	•

Combination 3-Gang

Description	Material	Catalog No.	Colors	
2 Toggles & Duplex Receptacle	Nylon	□ 5158__	B, GY, V, W	•
	Thermoset	□ 2158__	A, B, LA, V, W	•
	302/304 Stainless Steel	□ 93543	—	•
2 Toggles & Decorator	Thermoset	□ 2173__	A, LA, V, W	•
	302/304 Stainless Steel	□ 93443	—	•

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)


Icon Key


NAFTA Compliant - see page O-30

Certifications

2000 series wallplates are cULus certified
5000 series wallplates are cULus certified
90000 series wallplates are UL and CSA certified


Combination 4-Gang

Description	Material	Catalog No.	Colors	
3 Toggles & Duplex Receptacle	Thermoset	□ 2174__	A, LA, V, W	•
	302/304 Stainless Steel	□ 93554	—	•



4-Gang, 3 Toggles & Duplex Receptacle

Power Outlet

Description	Material	Catalog No.	Colors	
1-Gang with 1.59" (40.5mm) Hole	302/304 Stainless Steel	□ 93111	—	•
1-Gang with 2.15" (54.8mm) Hole	Thermoset	□ 2068	A, B, V, W	•
	302/304 Stainless Steel	□ 93221	—	•
	Chrome	□ 39CH*	—	•
2-Gang with 2.15" (54.7mm) Hole	Thermoset	□ 2168__	A, B, LA, V, W	•
	302/304 Stainless Steel	□ 93227	—	•
	Chrome	□ 68*	—	•
2-Gang with 2.15" (54.7mm) Off Center Hole	Chrome	□ 192*	—	•
2-Gang with 2.28" (57.9mm) Hole	302/304 Stainless Steel	□ 93228	—	•
2-Gang with 2.47" (62.7mm) Hole	302/304 Stainless Steel	□ 93223	—	•
	Chrome	□ 69*	—	•
2-Gang with 2.47" (62.7mm) Hole	Nylon	□ 5169__	B, V, W	•

* UL certified



93111



93221



192



93223, 69



2168
93227, 68



93228

Standard Size Wallplate Guide for Power Devices

Power Device Catalog No.	Wallplate Catalog No.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N	39CH, 68, 2068, 2168, 93221, 93227
5515N, 5744N, 5754N, 8430N, 8450N, 8460N, 9460N	69, 5169, 93223
122B	192

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key


 NAFTA Compliant - see page O-30

Certifications

2000 series wallplates are cULus certified
5000 series wallplates are cULus certified
90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21

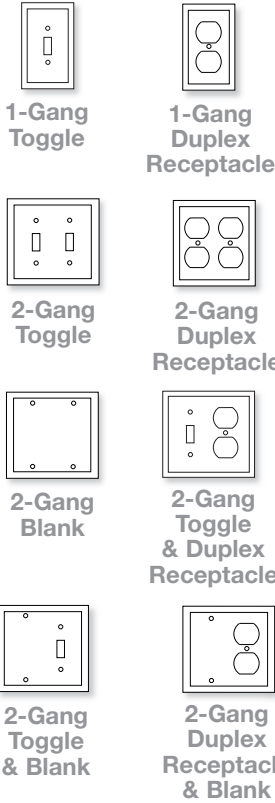

Extra Depth*					
Description	Material	Catalog No.	Colors		
1-Gang Toggle	Thermoset	□ 4134__	V, W		•
1-Gang Duplex Receptacle	Thermoset	□ 4132__	V, W		•
2-Gang Toggle	Thermoset	□ 4139__	V, W		•
2-Gang Duplex Receptacle	Thermoset	□ 4150__	V, W		•
2-Gang Blank	Thermoset	□ 4137__	V, W		•
2-Gang Toggle & Duplex Receptacle	Thermoset	□ 4138__	V, W		•
2-Gang Toggle & Blank	Thermoset	□ 4171__	V, W		•
2-Gang Duplex Receptacle & Blank	Thermoset	□ 4170__	V, W		•

*Extra Depth Wallplates are approximately 10% deeper than standard size/standard depth counterparts.



Pre-Marked Special Use, Standard Size					
Description	Material	Catalog No.	Colors		
1-Gang Toggle	Nylon	□ EM5134__	RD		•
"Emergency"	302/304 Stainless Steel	□ EM93071	—		•
1-Gang Duplex Receptacle	Nylon	□ IG5132__	GY, V, RN, W		•
"Isolated Ground"	302/304 Stainless Steel	□ IG93101	—		•
1-Gang Duplex Receptacle	Nylon	□ EM5132__	RD		•
"Emergency"	302/304 Stainless Steel	□ EM93101	—		•
1-Gang Single Receptacle with 1.40" (35.7mm) Hole	Nylon	□ IG5131__	V, RN		•
"Isolated Ground"					
2-Gang Single Receptacle with 2.44" (61.9mm) Hole	302/304 Stainless Steel	□ IG4518C	—		•
"Isolated Ground"					
2-Gang Duplex Receptacle	302/304 Stainless Steel	□ EM93102	—		•
"Emergency"					

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

NAFTA Compliant - see page O-30



Certifications

2000 series wallplates are cULus certified
 4000 series wallplates are cULus certified
 5000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified

Specification Information:


Wallplates: J-21

Toggle Switch


Description	Material	Catalog No.	Colors		
1-Gang Toggle	Polycarbonate	<input type="checkbox"/> PJ1 __	A, B, BK, GY, LA, RD, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ1AM __	GY, RD, V, W	•	
	Thermoset	<input type="checkbox"/> 2034 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93971	—		•
2-Gang Toggle	Polycarbonate	<input type="checkbox"/> PJ2 __	A, B, BK, GY, LA, RD, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ2AM __	GY, RD, V, W	•	
	Thermoset	<input type="checkbox"/> 2039 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93972	—		•
3-Gang Toggle	Polycarbonate	<input type="checkbox"/> PJ3 __	B, BK, GY, LA, RD, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ3AM __	GY, RD, V, W	•	
	Thermoset	<input type="checkbox"/> 2041 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93973	—		•
4-Gang Toggle	Polycarbonate	<input type="checkbox"/> PJ4 __	A, B, BK, GY, LA, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ4AM __	GY, V, W	•	
	Thermoset	<input type="checkbox"/> 2054 __	A, LA, V, W		•
5-Gang Toggle	Polycarbonate	<input type="checkbox"/> PJ5 __	A, B, BK, GY, LA, V, W		
6-Gang Toggle	Polycarbonate	<input type="checkbox"/> PJ6 __	A, B, BK, GY, LA, V, W		




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang




6-Gang

Duplex Receptacle

Description	Material	Catalog No.	Colors		
1-Gang	Polycarbonate	<input type="checkbox"/> PJ8 __	A, B, BK, BL, GY, LA, RD, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ8AM __	GY, RD, V, W	•	
	Thermoset	<input type="checkbox"/> 2032 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93901	—		•
2-Gang	Polycarbonate	<input type="checkbox"/> PJ82 __	A, B, BK, GY, LA, RD, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ82AM __	GY, RD, V, W	•	
	Thermoset	<input type="checkbox"/> 2050 __	A, V, LA, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93902	—		•



1-Gang





2-Gang

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

-  NAFTA Compliant - see page O-30
-  REPEL Wallplates - see page J-1

Certifications

2000 series wallplates are cULus certified
 5000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21




1-Gang
with 1.406"
Hole

Single Receptacle


Description	Material	Catalog No.	Colors	
1-Gang with 1.406" (35.712mm) Hole	Thermoset	<input type="checkbox"/> 2031 __	A, B, LA, V, W	•
	302/304 Stainless Steel	<input type="checkbox"/> 93991	—	•




1-Gang




2-Gang




3-Gang



4-Gang



5-Gang



6-Gang

Decorator

Description	Material	Catalog No.	Colors		
1-Gang	Polycarbonate	<input type="checkbox"/> PJ26 __	A, B, BK, BL, GY, LA, RD, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ26AM __	GY, RD, V, W	•	
	Thermoset	<input type="checkbox"/> 2051 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93934	—		•
2-Gang	Polycarbonate	<input type="checkbox"/> PJ262 __	A, B, BK, BL, GY, LA, RD, RN, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ262AM __	GY, RD, V, W	•	
	Thermoset	<input type="checkbox"/> 2052 __	A, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93935	—		•
3-Gang	Polycarbonate	<input type="checkbox"/> PJ263 __	A, B, BK, GY, LA, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ263AM __	GY, V, W	•	
	Thermoset	<input type="checkbox"/> 2063 __	A, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93936	—		•
4-Gang	Polycarbonate	<input type="checkbox"/> PJ264 __	A, B, BK, GY, LA, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ264AM __	GY, V, W	•	
	Thermoset	<input type="checkbox"/> 2064 __	A, LA, V, W		•
5-Gang	Polycarbonate	<input type="checkbox"/> PJ265 __	A, B, BK, GY, LA, V, W		
6-Gang	Polycarbonate	<input type="checkbox"/> PJ266 __	A, B, BK, GY, LA, V, W		

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Specification Information:

Wallplates: J-21


Icon Key





- NAFTA Compliant - see page O-30
- REPEL Wallplates - see page J-1

Certifications


PJ & PJS series wallplates are cULus certified
 2000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified


Screwless Decorator

Description	Material	Catalog No.	Colors	
1-Gang	Polycarbonate	<input type="checkbox"/> PJS26 __	A, B, BK, GY, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS26AM __	GY, V, W	•
2-Gang	Polycarbonate	<input type="checkbox"/> PJS262 __	A, B, BK, GY, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS262AM __	GY, V, W	•
3-Gang	Polycarbonate	<input type="checkbox"/> PJS263 __	A, BK, GY, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS263AM __	GY, V, W	•
4-Gang	Polycarbonate	<input type="checkbox"/> PJS264 __	A, BK, GY, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS264AM __	GY, V, W	•
5-Gang	Polycarbonate	<input type="checkbox"/> PJS265 __	A, BK, GY, LA, V, W	
6-Gang	Polycarbonate	<input type="checkbox"/> PJS266 __	A, BK, GY, LA, V, W	




Screwless Toggle

Description	Material	Catalog No.	Colors	
1-Gang	Polycarbonate	<input type="checkbox"/> PJS1 __	A, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS1AM __	V, W	•
2-Gang	Polycarbonate	<input type="checkbox"/> PJS2 __	A, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS2AM __	V, W	•
3-Gang	Polycarbonate	<input type="checkbox"/> PJS3 __	A, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS3AM __	V, W	•
4-Gang	Polycarbonate	<input type="checkbox"/> PJS4 __	A, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS4AM __	V, W	•



Screwless Receptacle



Description	Material	Catalog No.	Colors	
1-Gang	Polycarbonate	<input type="checkbox"/> PJS8 __	A, LA, V, W	
	REPEL Polycarbonate	<input type="checkbox"/> PJS8AM __	V, W	•



Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

-  NAFTA Compliant - see page O-30
-  REPEL Wallplates - see page J-1

Certifications


PJ & PJS series wallplates are cULus certified

Specification Information:

Wallplates: J-21



1-Gang



2-Gang

Blank - Box & Strap Mounted

Description	Material	Catalog No.	Colors		
1-Gang Box Mounted	Polycarbonate	<input type="checkbox"/> PJ13 __	A, B, BK, GY, LA, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ13AM __	GY, V, W	•	
	Thermoset	<input type="checkbox"/> 2029 __	A, B, LA, V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93951	—		•
1-Gang Strap Mounted	Polycarbonate	<input type="checkbox"/> PJ14 __	A, B, BK, GY, LA, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ14AM __	GY, V, W	•	
2-Gang Box Mounted	Polycarbonate	<input type="checkbox"/> PJ23 __	A, B, BK, GY, LA, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ23AM __	GY, V, W	•	
	Thermoset	<input type="checkbox"/> 2037 __	A, LA, V, W		•
2-Gang Strap Mounted	Polycarbonate	<input type="checkbox"/> PJ24 __	A, B, BK, GY, LA, V, W		
	REPEL Polycarbonate	<input type="checkbox"/> PJ24AM __	GY, V, W	•	



1-Gang with 0.375" Hole



1-Gang with 0.406" Hole, Box Mounted



1-Gang with 0.406" Hole, Strap Mounted

Telephone & Coax

Description	Material	Catalog No.	Colors		
1-Gang with 0.37" (9.5mm) Hole	Thermoset	<input type="checkbox"/> 2028 __	V, W		•
	302/304 Stainless Steel	<input type="checkbox"/> 93996	—		•
1-Gang with 0.40" (10.3mm) Hole, Box Mounted	Polycarbonate	<input type="checkbox"/> PJ11 __	A, B, BK, GY, LA, V, W		
1-Gang with 0.40" (10.3mm) Hole, Strap Mounted	Polycarbonate	<input type="checkbox"/> PJ12 __	A, B, BK, GY, LA, V, W		

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

- NAFTA Compliant - see page O-30
- REPEL Wallplates - see page J-1


Certifications


PJ & PJS series wallplates are cULus certified
 2000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21

Combination 2-Gang

Description	Material	Catalog No.	Colors	
Toggle & Duplex Receptacle	Polycarbonate	<input type="checkbox"/> PJ18 __	A, B, BK, GY, LA, RD, V, W	
	Thermoset	<input type="checkbox"/> 2038 __	A, B, LA, V, W	•
	302/304 Stainless Steel	<input type="checkbox"/> 93932	—	•
Toggle & Decorator	Polycarbonate	<input type="checkbox"/> PJ126 __	A, BK, GY, LA, V, W	
	Thermoset	<input type="checkbox"/> 2053 __	A, LA, V, W	•
	302/304 Stainless Steel	<input type="checkbox"/> 93937	—	•
Toggle & Blank	Polycarbonate	<input type="checkbox"/> PJ113 __	A, B, BK, GY, LA, V, W	
Duplex Receptacle & Blank	Polycarbonate	<input type="checkbox"/> PJ138 __	A, B, BK, GY, LA, RD, V, W	
Duplex Receptacle & Decorator	Polycarbonate	<input type="checkbox"/> PJ826 __	A, B, BK, GY, LA, RD, V, W	

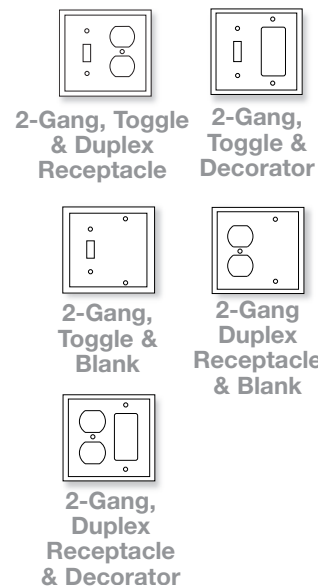


Combination 3-Gang

Description	Material	Catalog No.	Colors	
2 Toggles & Duplex Receptacle	Polycarbonate	<input type="checkbox"/> PJ28 __	A, B, BK, GY, LA, RD, V, W	
2 Toggles & Decorator	Polycarbonate	<input type="checkbox"/> PJ226 __	A, B, BK, GY, LA, RD, V, W	



Power Outlet

Description	Material	Catalog No.	Colors	
1-Gang with 1.40" (35.7mm) Hole	Polycarbonate	<input type="checkbox"/> PJ7 __	A, B, BK, GY, LA, RD, V, W	
1-Gang with 1.59" (40.5mm) Hole	Polycarbonate	<input type="checkbox"/> PJ720 __	B, GY, V, W	
1-Gang with 2.15" (54.7mm) Hole	Polycarbonate	<input type="checkbox"/> PJ724 __	B, BK, V, W	
	Nylon	<input type="checkbox"/> 5068 __	B, V	•
	Thermoset	<input type="checkbox"/> 2068 __	A, B, V, W	•
2-Gang with 2.15" (54.7mm) Hole	Polycarbonate	<input type="checkbox"/> PJ703 __	B, V, W	



Mid-Size Wallplate Guide for Power Devices

Power Device Catalog No.	Wallplate Catalog No.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N	5068, PJ724, PJ703

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key


 NAFTA Compliant - see page O-30

Certifications

PJ & PJS series wallplates are cULus certified
 2000 series wallplates are cULus certified
 5000 series wallplates are cULus certified
 90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21

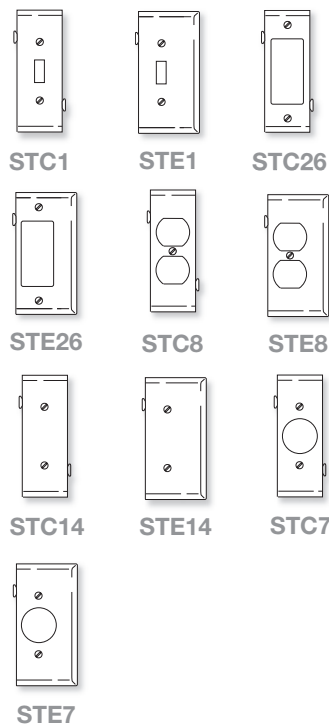

Sectional Wallplates

Description	Material	Location	Catalog No.	Colors
1-Gang Toggle	Polycarbonate	Center	<input type="checkbox"/> STC1 __	V, W
		End	<input type="checkbox"/> STE1 __	V, W
1-Gang Decorator	Polycarbonate	Center	<input type="checkbox"/> STC26 __	V, W
		End	<input type="checkbox"/> STE26 __	V, W
1-Gang Duplex Receptacle	Polycarbonate	Center	<input type="checkbox"/> STC8 __	V, W
		End	<input type="checkbox"/> STE8 __	V, W
1-Gang Blank	Polycarbonate	Center	<input type="checkbox"/> STC14 __	V, W
		End	<input type="checkbox"/> STE14 __	V, W
1-Gang Single Receptacle 1.40" (35.7mm) Hole	Polycarbonate	Center	<input type="checkbox"/> STC7 __	V,
		End	<input type="checkbox"/> STE7 __	V, W

Pre-Marked Special Use

Description	Material	Catalog No.	Colors
1-Gang Toggle "Emergency"	Polycarbonate	<input type="checkbox"/> PJ1EM __	RD
1-Gang Decorator "Computer"	Polycarbonate	<input type="checkbox"/> PJ26CO __	BL, V, W
1-Gang Decorator "Emergency"	Polycarbonate	<input type="checkbox"/> PJ26EM __	RD
1-Gang Decorator "GFCI Protected"	Polycarbonate	<input type="checkbox"/> PJ26GF __	V, W
1-Gang Orange Decorator "Isolated Ground"	Polycarbonate	<input type="checkbox"/> PJ26IG	—
1-Gang Orange Single Receptacle, 1.40" (35.7mm) Hole "Isolated Ground"	Polycarbonate	<input type="checkbox"/> PJ7IG	—
1-Gang Duplex Receptacle "Computer"	Polycarbonate	<input type="checkbox"/> PJ8CO __	V, W
1-Gang Duplex Receptacle "Emergency"	Polycarbonate	<input type="checkbox"/> PJ8EM __	RD
1-Gang Duplex Receptacle "GFCI Protected"	Polycarbonate	<input type="checkbox"/> PJ8GF __	V, W
1-Gang Duplex Receptacle "Isolated Ground"	Polycarbonate	<input type="checkbox"/> PJ8IG __	RN
2-Gang Toggle "Emergency"	Polycarbonate	<input type="checkbox"/> PJ2EM __	RD
2-Gang Duplex Receptacle "Emergency"	Polycarbonate	<input type="checkbox"/> PJ82EM __	RD

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)


Specification Information:

Wallplates: J-21

Certifications


PJ & PJS series wallplates are cULus certified
ST series wallplates are cULus certified

Toggle Switch


Description	Material	Catalog No.	Colors	
1-Gang	Thermoset	□ 2144__	A, B, LA, V, W	•
	302/304 Stainless Steel	□ 93871	—	•
2-Gang	Thermoset	□ 2149__	A, B, LA, V, W	•
	302/304 Stainless Steel	□ 93872	—	•
3-Gang	Thermoset	□ 2741__	V, W	•
	302/304 Stainless Steel	□ 93873	—	•
4-Gang	302/304 Stainless Steel	□ 93874	—	•




1-Gang



2-Gang




3-Gang



4-Gang


Decorator

Description	Material	Catalog No.	Colors	
1-Gang	Thermoset	□ 2751__	V, W	•
	302/304 Stainless Steel	□ 93834	—	•



1-Gang

Duplex Receptacle

Description	Material	Catalog No.	Colors	
1-Gang	Thermoset	□ 2142__	A, B, LA, V, W	•
	302/304 Stainless Steel	□ 93801	—	•
2-Gang	Thermoset	□ 2750__	V, W	•
	302/304 Stainless Steel	□ 93802	—	•




1-Gang



2-Gang

Single Receptacle

Description	Material	Catalog No.	Colors	
1-Gang with 1.40" (35.7mm) Hole	Thermoset	□ 2731__	V, W	•
	302/304 Stainless Steel	□ 93891	—	•



1-Gang,
1.406" Hole

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

 NAFTA Compliant - see page O-30

Certifications

2000 series wallplates are cULus certified
90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21



1-Gang



2-Gang



2-Gang,
Toggle &
Duplex
Receptacle



1-Gang,
0.375" Hole



GFER



2160



231



153

Blank - Box Mounted

Description	Material	Catalog No.	Colors	
1-Gang	Thermoset	□ 2729__	V, W	•
	302/304 Stainless Steel	□ 93851	—	•
2-Gang	302/304 Stainless Steel	□ 93852	—	•

Combination 2-Gang

Description	Material	Catalog No.	Colors	
Toggle & Duplex Receptacle	Thermoset	□ 2148__	B, V, W	•

Telephone & Coax

Description	Material	Catalog No.	Colors	
1-Gang with 0.37" (9.5mm) Hole	Thermoset	□ 2728__	V, W	•
	302/304 Stainless Steel	□ 93896	—	•

Wallplate Accessories

Description	Finish/Material	Catalog No.	Colors	
GFCI Extension Ring for use with GFCIs, 7/8" spacer	—	□ GFER-__**	B, BK, LA, V, W	
Adapter - Decorator to Blank	—	□ 2160__	B, V, LA, W	•
Adapter - Decorator to Toggle	—	□ 2161__	V, W	•
Toggle & Receptacle Wallplate Screws #6-32 x 1/2" (12.7mm) for Toggle & Receptacle Wallplates	Baked Enamel Head/Metal	□ 231__	A, B, V, LA, W	
	Nylon	□ 232__	RD, V, W	
Toggle & Receptacle Wallplate Screws #6-32 x 5/16" (7.9mm) for Toggle & Receptacle Wallplates	Baked Enamel Head/Metal	□ 2231__	V, LA, W	
Recessed Pilot Light Lamp Holder with 6 Watt Clear S-6 Bulb	—	□ 153*†	—	•

*For use with louver wallplate

** cULus certified

† UL, CSA certified

Color Ordering Information

For ordering wallplates, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), RN (Orange), V (Ivory), W (White)

Icon Key

NAFTA Compliant - see page O-30

Certifications

2000 series wallplates are cULus certified
90000 series wallplates are UL and CSA certified

Specification Information:

Wallplates: J-21

Advanced LED technology

Arrow Hart's innovative LED Accent Lights provide functional task lighting or pathway illumination.



LED Accent Lights

LED light provides powerful illumination with 30 lumens for LNL3 and LNL2 models and 15 lumens for LNL1 and LNL4 models

Fits into standard junction box with one-gang plaster ring for easy installation

Polycarbonate lens protects electronics from tampering

Energy-efficient LED 3W or 4W light available in white, amber and red



Additional Features and Benefits

- Integrated, illuminated push-button switch standard on LNL2 model
- Wet location configurations available
- Low voltage models available
- Narrow depth is ADA compliant
- White painted faceplate is standard; black and brushed nickel paint options are available
- Operates on standard 120V power supply
- Aluminum louvered or scoop faceplate displays light evenly



LNL1 Series

LED Accent Lights

LED Nightlights with Vertical Louvered Faceplate

W	V/AC	Description	Cat. No.	Faceplate	LED Colors
4	120	Standard	<input type="checkbox"/> LNL1__120	W, B, BN	A, R, W
		Wet Location	<input type="checkbox"/> LNL1__120-WL	W, B, BN	A, R, W
12-24	Low Voltage	Standard	<input type="checkbox"/> LNL1__LV	W, B, BN	A, R, W
		Low Voltage, Wet Location	<input type="checkbox"/> LNL1__LV-WL	W, B, BN	A, R, W



LNL2 Series

LED Chart Lights with Push Button Switch & Vertical Scoop Faceplate

W	V/AC	Description	Cat. No.	Faceplate	LED Colors
3	120	Standard	<input type="checkbox"/> LNL2__120	W	W
		Wet Location	<input type="checkbox"/> LNL2__120-WL	W	W
12-24	Low Voltage	Standard	<input type="checkbox"/> LNL2__LV	W	W
		Low Voltage, Wet Location	<input type="checkbox"/> LNL2__LV-WL	W	W



LNL3 Series

LED Nightlights with Vertical Scoop Faceplate

W	V/AC	Description	Cat. No.	Faceplate	LED Colors
3	120	Standard	<input type="checkbox"/> LNL3__120	W, B, BN	A, R, W
		Wet Location	<input type="checkbox"/> LNL3__120-WL	W, B, BN	A, R, W
12-24	Low Voltage	Standard	<input type="checkbox"/> LNL3__LV	W, B, BN	A, R, W
		Low Voltage, Wet Location	<input type="checkbox"/> LNL3__LV-WL	W, B, BN	A, R, W



LNL4 Series

LED Nightlights with Horizontal Louvered Faceplate

W	V/AC	Description	Cat. No.	Faceplate	LED Colors
4	120	Standard	<input type="checkbox"/> LNL4__120	W, B, BN	A, R, W
		Wet Location	<input type="checkbox"/> LNL4__120-WL	W, B, BN	A, R, W
12-24	Low Voltage	Standard	<input type="checkbox"/> LNL4__LV	W, B, BN	A, R, W
		Low Voltage, Wet Location	<input type="checkbox"/> LNL4__LV-WL	W, B, BN	A, R, W

Color Ordering Information

For ordering, include Cat. No. followed by the color code. Faceplates: W (White), B (Black), BN (Brushed Nickel)
LED color: A (Amber), R (Red) W (White). **Example:** LNL4WA120 (white faceplate and amber LED).

Specification Information:
LED Accent Lights: J-22

Certifications

LED accent lights are UL and CSA certified.
ADA Compliant

Wallplates

Standard Size
Mid-Size
Oversize
REPEL

	Wallplate Type	Standard Size, Mid-Sized & Oversize Wallplates				REPEL	
	Material Type	Thermoset	Nylon	Stainless Steel	Polycarbonate	REPEL Polycarbonate Mid-Sized Wallplates PJ_AM and PJS_AM Series	REPEL Stainless Steel Standard Size Wallplates 93070_AM, 93090_AM, 93100_AM, 93400_AM Series
	Manufacturing Process	Injection Molded	Injection Molded	Stamped	Injection Molded	Injection Molded	Stamped
	Testing & Code Compliance	UL Listed to UL 514D, file no. E33216	UL Listed to UL 514D, file no. E33216	UL Listed to UL 514D, file no. E92003	UL Listed to UL 514D, file no. E33216	UL Listed to UL 514D, file no. E33216	UL Listed to UL 514D, file no. E92003
		cUL certified to C22.2, no. 42.1, UL file E33216	cUL certified to C22.2, no. 42.1, UL file E33216	CSA certified to C22.2, no. 42.1	cUL, UL file E33216 certified to C22.2, no. 42.1	Agion® Antimicrobial Additive: EPA approved for use as product ingredient	Agion® Antimicrobial Additive: EPA approved for use as product ingredient
Specifications: Environmental	Flammability	Meets UL 94 requirements; 5V rated	Meets UL 94 requirements; 5V rated	N/A	Meets UL 94 requirements 5VA rated	Meets UL 94 requirements; 5V rated	N/A
	Temperature Rating	-40°C to 90°C (-40°F to 194°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40° to 70° C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
Materials:	Body	0.080" thick thermoset urea or phenolic	0.060" thick thermoplastic	0.032" thick stainless steel alloy, 18% chromium and 8% nickel for corrosion resistance	0.08" thick thermoplastic polycarbonate	0.071" thick polycarbonate with Agion® Antimicrobial Additive incorporated	0.032" thick 302/304 stainless steel alloy, 18% chromium and 8% nickel for corrosion resistance, DuPont® Alesta® powder coating with Agion® Antimicrobial incorporated
	Inner Wallplate	N/A	N/A	N/A	0.071" thick polycarbonate	PJS_AM only: 0.071" thick polycarbonate	N/A


NOTE: REPEL products do not protect the user against disease causing organisms and ongoing regular cleaning practices should be maintained. Agion is a registered trademark of Agion Technologies, Inc., Wakefield, MA

Commercial Specification
Grade LED Accent Lights


120 V/AC
60 Hz

	Series Type	Louvered Faceplate LNL1, LNL4 Series	Scoop Faceplate LNL2, LNL3 Series
Illumination		12 LEDs providing 15 Lumens LED life rated 30,000 hours	6 LEDs providing 30 Lumens LED life rated 20,000 hours
Power Consumption		>4 Watts	>3 Watts
Housing		Diecast aluminum	Diecast aluminum
Testing & Code Compliance		<ul style="list-style-type: none"> Listed to UL 1598 CSA certified 	<ul style="list-style-type: none"> Listed to UL 1598 CSA certified
Power Supply		120 V/AC	120 V/AC
Installation		Single-gang junction box	Single-gang junction box
Environmental:	Temperature Rating	25°C (77°F)	25°C (77°F)
	Flammability Rating	UL 945-5V	UL 945-5V
Materials:	Faceplate	Aluminum	Aluminum
	Back body	ABS Plastic	ABS Plastic
	Strap	Aluminum	Aluminum
	Wire	18 AWG, 600V, 105°C	18 AWG, 600V, 105°C


LNL1 Series

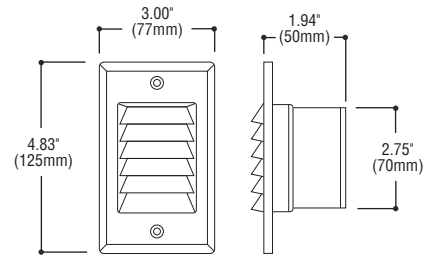


LNL2 Series

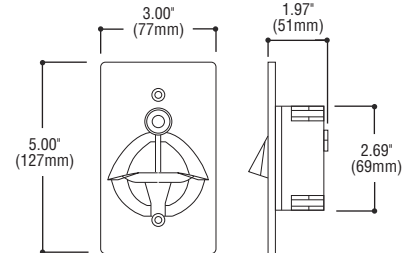

LNL3 Series

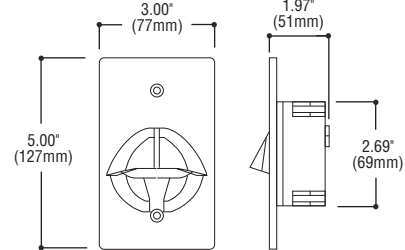

LNL4 Series

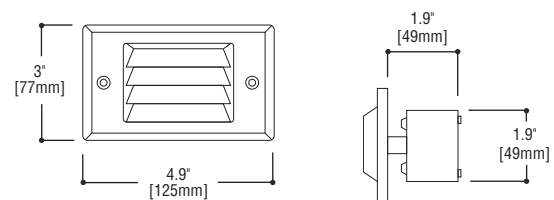

Photometrics

