



Weatherproof Covers and Boxes



	Page		Page
NEC® Compliance	K-1	Metal Weatherproof Covers	K-8
Weatherproof Receptacle Covers	K-3	Weatherproof Covers with Devices	K-9
Deluxe Weatherproof Covers for FS/FD Boxes	K-3	1-Gang Weatherproof Boxes	K-10
Standard Weatherproof Covers for FS/FD Boxes	K-3	Cast Aluminum FS Boxes	K-10
Weatherproof Covers for 30A, 50A & 60A Straight Blade Receptacles	K-4	Non-Metallic FS Box	K-10
Weatherproof Covers for 50A Locking Devices in FS/FD Boxes	K-4	Weather Protective Boots	K-11
Weatherproof Covers for Power-Lock™ Devices in FS/FD Boxes	K-4	Plug and Connector Weather Protective Boots	K-11
Weatherproof Nylon Covers for 15A, 20A & 30A Devices . .	K-5	50A Armored Plug & Connector Weather Protective Boots	K-11
Weatherproof While-In-Use Covers	K-5		
Metal WeatherBox™	K-5		
Original WeatherBox™ 1-Gang	K-2, K-6		
Original WeatherBox™ 2-Gang	K-2, K-6		
Non-Metallic Weather Protective Covers	K-7		
Weatherproof Receptacle Covers	K-7		
Weatherproof Switch Covers	K-7		
Protective Receptacle Covers	K-7		

**Tough environments
require tough solutions**

Our broad offering of weatherproof products are designed for impact resistance, corrosion resistance, UV resistance and longevity in virtually any outdoor or indoor wet or damp location.

**Deluxe Weatherproof
Covers**

Corrosion resistant diecast aluminum, self-closing design provides superior protection in wet and damp locations. Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).

**Metal WeatherBox™
While-In-Use Covers**

Diecast aluminum construction with NEMA 3R rating, meets NEC® 406.8(B)(1), and protects electrical connections while-in-use.

**Non-Metallic Weatherproof
Covers**

UL listed for wet locations with cover closed these rugged covers resist high impact and sunlight. Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).

**WeatherBox™
While-In-Use Covers**

Patented moveable hinge design allows for horizontal or vertical mounting and protects your connections while-in-use. Meets NEC® 406.8 (B)(1).

**Weatherproof Switch Cover**

Provides protection for switching in wet or damp locations. Meets NEC® 404.4.

**Weatherproof Nylon Covers**

UL listed for wet and damp locations, these rugged glass reinforced nylon covers provide protection for both straight blade and locking applications. Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).

**Cast Aluminum FS Boxes**

Powder coated finish for exceptional durability.

**Weather Protective Boots**

Provide protection from the elements for plugs & connector bodies ranging from 15 to 50A.

Wet Locations for 15A and 20A Receptacles



NEC 406.8

The NEC defines Wet Locations as installations underground or in concrete slabs or masonry in direct contact with the earth; in locations subject to saturation with water or other liquids, such as vehicle washing areas; and in unprotected locations exposed to weather.

NEC Article 406.8 (B) (1) requires all 15- and 20-ampere, 125- and 250-volt receptacles installed in a wet location to have an enclosure that is weatherproof whether or not the plug is inserted. These receptacles must use a While-In-Use cover.

Applicable Arrow Hart products:

WIU-1	WIUMV-1
WIU-1D	WIUMH-1
WIU-2	

Wet Locations for Other Receptacles



NEC 406.8 (B) (2)

All other receptacles installed in a wet location shall comply with (B)(2)(a) or (B)(2)(b).

(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g. portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.

Applicable Arrow Hart products:

WLRS1	7420	7420C	20416N	S1951	S3962	S994	S993
WLRS2	7420CR	7770	20416D	S1952	S2966	S989	
WLRA1	7420A	7788	WP1	S1954	S3966	S966	
AH7879	5741NS	20446N	WP2	S2962	S992	S1966	

Damp Locations for Receptacles



NEC 406.8 (A)

A damp location is defined as a location protected from weather and not subject to saturation with water or other liquids but subject to moderate degrees of moisture. Examples of such locations include partially protected locations under canopies, marquees, roofed pen porches, and like locations, and interior locations subject to moderated degrees of moisture, such as basements, barns, and cold storage buildings.

NEC Article 406.8 (A) requires receptacles installed in damp locations to have an enclosure for the receptacle that is weatherproof when the receptacle is covered (attachment plug is not inserted and receptacle cover is closed).

An installation suitable for wet locations shall also be considered suitable for damp locations.

Therefore, all catalog numbers noted for compliance to 406.8 (B)(1) and 406.8 (B)(2) are also suitable for use in damp locations.

Applicable Arrow Hart products:

S1961	S1962
-------	-------

Wet or Damp Locations for Switches



NEC 404.4

A surface-mounted switch or circuit breaker in a damp or wet location shall be enclosed in a weatherproof enclosure, and flush-mounted switches and circuit breakers in damp or wet locations shall be equipped with a weatherproof cover.

Applicable Arrow Hart products:

S983	S2983
S984	S3999

Award-winning design offers superior functionality


The Original WeatherBox™ While-in-Use protective covers combine the best of advanced materials, technology and industrial design for years of solid protection and uninterrupted use in challenging outdoor conditions.

Patented movable polycarbonate hinges allow for easy mounting either horizontally or vertically, will not rust or corrode in wet conditions, and are non-conductive

Durable one-piece corrosion-resistant polycarbonate cover offers additional strength and weather protection

Easy to open/close with a lockable clasp


Three easy-to-install molded inserts for use with decorator devices, duplex or single receptacles, and toggle switches

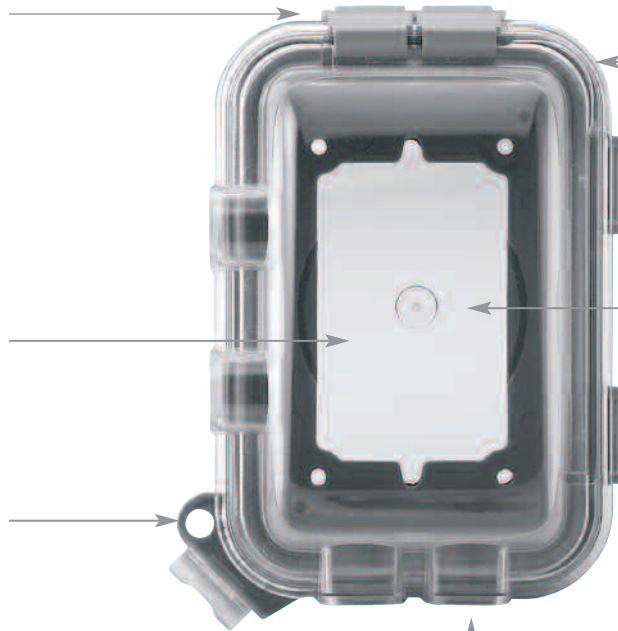

Pre-applied gasket makes it easy to mount the box

Deep, see-through design of cover offers plenty of space for plugs and cords, along with easy visual confirmation of plug status

Cord opening fits #12 AWG or lighter cord

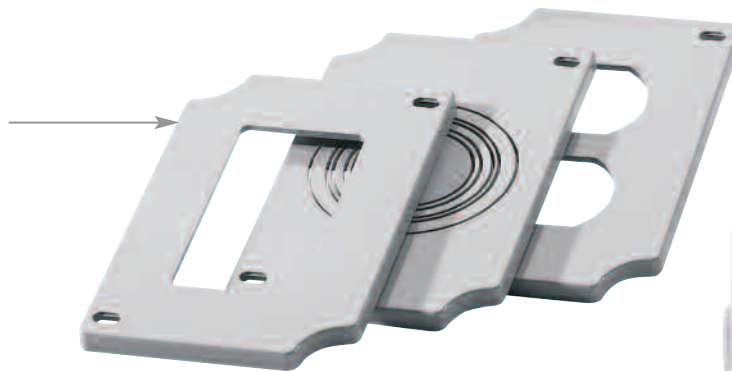

The 2008 NEC® Article 406.8 (B)(1) requires all 15- and 20-ampere, 125- and 250-volt receptacles installed outdoors in wet locations to be installed in enclosures that are weatherproof with or without a plug inserted.



2005 Gold
ADEX Award
by *Design Journal*

Industrial Specification Grade Device Covers

Metal Covers for FS/FD Boxes

Deluxe Weatherproof Covers for FS/FD Boxes

FEATURES


- UL listed for wet locations (cover closed) and damp locations (cover open or closed).
- Meets 2008 NEC 406.8 (A) and 406.8 (B)(2).
- Diecast copper free aluminum with epoxy finish provides maximum corrosion resistance.
- Self-closing spring door assures full protection.
- EPDM gasketing material on WLRD1 and WLRs1 provide excellent resistance to ozone, weathering and temperatures from -46° C to 127° C (-50°F to 260°F).

Diecast Aluminum Receptacle Covers




Product Description	Catalog No.	
Duplex receptacle cover, horizontal mounting	<input type="checkbox"/> WLRD1	•
Single receptacle cover, vertical mounting, 1.38" (34.9mm) face diameter, use with 15A, 20A straight blade and 15A Hart-Lock™ receptacles	<input type="checkbox"/> WLRs1	•
Single receptacle cover, vertical mounting, 1.56" (39.7mm) face diameter, use with 20A and 30A Hart-Lock™ receptacles	<input type="checkbox"/> WLRs2	•
Adapter, flush mounts above covers to standard boxes	<input type="checkbox"/> WLRa1*	•

*Not cULus certified



WLRD1

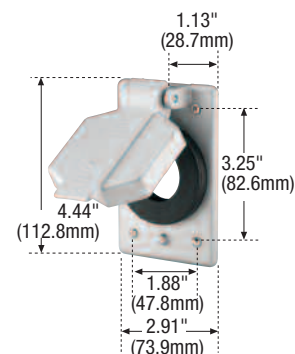

WLRs1

Standard Weatherproof Covers for FS/FD Boxes

FEATURES

- UL listed for wet locations (cover closed) and damp locations (cover open or closed).
- Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).
- Self-closing spring door assures full protection.
- Gasketing material provides excellent resistance to weather.
- Duplex covers can be used with any duplex receptacle.

Diecast Aluminum Receptacle Covers



Product Description	Catalog No.	
Duplex receptacle, vertical mounting	<input type="checkbox"/> AH7879*	•
Single receptacle cover, vertical mounting, 1.38-1.56" (34.9-39.7mm) face diameter, use with 15A and 20A single straight blade receptacles and 15A, 20A and 30A single Hart-Lock™ receptacles	<input type="checkbox"/> 7420	•
Single receptacle cover, vertical mounting, 1.38-1.56" (34.9-39.7mm) face diameter, yellow corrosion resistant finish, used with 15A and 20A single straight blade receptacles and 15A, 20A and 30A single Hart-Lock™ receptacles	<input type="checkbox"/> 7420CR	•
Single receptacle, vertical mounting for 2.12" (53.8mm) face diameter, use with 30A straight blade receptacles	<input type="checkbox"/> 7420A	•

* Not UL listed

Note: Cat. No. 7420, 7420CR have inserts for protecting toggle; can be used with most standard length toggle switches.



7420



7420CR

Icon Key

NAFTA Compliant - see page O-30


Industrial Specification Grade Device Covers

Metal and Nylon Covers

Weatherproof Covers for 30A, 50A & 60A Straight Blade Receptacles

FEATURES

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed).
- Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).
- Self-closing spring door assures full protection.
- Gasketing material provides excellent resistance to weather.



7788CR

Diecast Aluminum Covers

Product Description

Weatherproof lift lid cover for 4.69" (119.1.0mm) flush box, use box 2.125" (53.96mm) deep or larger

Catalog No.

5741NS*

Weatherproof lift lid cover for FS/FD boxes, use box 2.125" (53.96mm) deep or larger

7420C

* Not UL listed.



Weatherproof Covers for 50A Locking Devices in FS/FD Boxes

FEATURES

- UL Listed for wet locations (cover closed) damp locations (cover open or closed).
- Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).
- Self-closing spring door assures full protection.
- Gasketing material provides excellent resistance to weather.

Diecast Aluminum & Glass-Filled Nylon Covers

Product Description

Diecast aluminum lift lid cover

Catalog No.

7770*

Yellow glass-filled nylon lift lid cover

7788CR

Black glass-filled nylon lift lid cover

7788BK

Gray glass-filled nylon lift lid cover

7788GY


* Not cULus, UL listed only



Weatherproof Covers for Power-Lock™ Devices in FS/FD Boxes

FEATURES

- UL Listed for wet locations (cover closed) damp locations (cover open or closed).
- Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).
- Self-closing spring door assures full protection.
- Gasketing material provides excellent resistance to weather.



20416N

Diecast Aluminum and Glass Filled Nylon Covers

Product Description

Red glass-filled nylon lift lid cover for 4-wire 30A receptacles

Catalog No.

20446N*

Gray glass-filled nylon lift lid cover for 4-wire 30A receptacles

20416N

Diecast aluminum lift lid cover for 4-wire 30A receptacles

20416D

* Not CSA



Icon Key

NAFTA Compliant - see page O-30


Weatherproof Covers for Locking and Straight Blade Receptacles

Nylon Covers for FS/FD Boxes


Weatherproof Nylon Covers for 15A, 20A & 30A Devices

FEATURES

- UL Listed for wet locations (cover closed) & damp locations (cover open or closed).
- Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).
- Rugged, glass-filled nylon provides high strength and wide temperature range for long life in abusive environments.
- Easy mounting on FS/FD boxes or equipment panels.
- Self-closing lift lid cover with neoprene gasket and stainless steel spring provides weatherproof protection.
- Universal mounting holes to accept all Cooper 15 & 20A and 30A locking flanged inlets and outlets, receptacles as well as devices with similar dimensions from other manufacturers.



WP1



WP2

Glass-Filled Nylon Covers

Product Description	Mtg Hole Pattern	Opening Diameter	Catalog No.	UL	SR
For 15 & 20A straight blade receptacles and 15A Hart-Lock™ flanged inlets & outlets	2 holes 180°, 2.09" (53.1mm) bolt dia. circle	1.75" (44.45mm)	□ WP1*	•	•
For 20 & 30A Hart-Lock™ flanged inlets & outlets and 30 & 50A, 3-W straight blade receptacles	Two sets of 3 equally spaced holes: 3 holes on 2.5" (63.5mm) bolt dia. circle and 3 holes on 2.69" (68.3mm) bolt dia. circle	2.25" (57.15mm)	□ WP2	•	•

* Not CSA


Metal WeatherBox™ While-In-Use Weather Protective Covers

Metal 1-Gang Lockable Cover Boxes

Metal While-In-Use Cover Boxes

FEATURES

- Meets 2008 NEC® 406.8 (B)(1) for receptacles in damp or wet locations.
- Diecast powder coated aluminum.
- NEMA 3R rating.
- Comes with gasket, mounting hardware, duplex receptacle insert and GFCI receptacle insert.
- Lockable to prevent accidental disconnects.



WIUMH-1

Metal Protective Covers

Description	Depth	# of Available Configurations using inserts	Color	Catalog No.	UL
Vertical Mount	3.25" deep (82.6mm)	2	Gray	□ WIUMV-1	•
Horizontal Mount	3.25" deep (82.6mm)	2	Gray	□ WIUMH-1	•



WIUM Inserts

Icon Key

NAFTA Compliant - see page O-30

Original WeatherBox™ While-In-Use Weather Protective Covers

1-Gang Self-Closing
2-Gang Self-Closing

WeatherBox, 1-Gang

FEATURES

- Meets 2008 NEC® 406.8 (B)(1).
- Rugged UV-resistant polycarbonate cover and back protects devices without cracking or breaking and is non-corrosive and non-conductive.
- Moveable hinges reposition easily for vertical or horizontal mounting.
- 1-Gang box includes 3 inserts for 16 different configurations.
- 2-Gang box includes 3 inserts for over 60 different configurations.
- Exceeds UL outdoor low voltage landscape lighting requirements.
- Box cover includes pre-mounted gasket.
- Meets Canadian Electrical Code rule 26-702.



WIU-1



WIU-1 Inserts

Standard Depth, 1-Gang Self-Closing Cover



Description	Depth	# of Available Configurations Using Inserts	Back Housing Color	Catalog No.
Horizontal/ Vertical Mount	Standard - 3.25" deep (82.6mm)	16	Gray	<input type="checkbox"/> WIU-1
Horizontal/ Vertical Mount	Standard - 3.25" deep (82.6mm)	16	White	<input type="checkbox"/> WIU-1W

Extra Depth, 1-Gang Self-Closing Cover




Description	Depth	# of Available Configurations Using Inserts	Back Housing Color	Catalog No.
Horizontal/ Vertical Mount	Deep - 4.75" deep (120.7mm)	16	Gray	<input type="checkbox"/> WIU-1D
Horizontal/ Vertical Mount	Deep - 4.75" deep (120.7mm)	16	White	<input type="checkbox"/> WIU-1DW

WeatherBox, 2-Gang


Standard Depth, 2-Gang Self-Closing Cover



Description	Depth	# of Available Configurations Using Inserts	Back Housing Color	Catalog No.
Vertical Mount	Standard - 3.25" deep (82.6mm)	60+	Gray	<input type="checkbox"/> WIU-2
Vertical Mount	Standard - 3.25" deep (82.6mm)	60+	White	<input type="checkbox"/> WIU-2W




WIU-2




WIU-2 Inserts

Non-Metallic Weather Protective Covers


- 1-Gang Self Closing
- 1-Gang Switch Cover
- 1-Gang Stay Open




S1952




S1954




S2966



S2983



S1961



S1962

Non-Metallic Weatherproof Receptacle Covers

FEATURES

- UL Listed for wet locations with cover closed.
- Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).
- Tough plastic construction resistant to high impact and sunlight.
- Non-corrosive and non-conductive.
- Gasket provided seals both device openings and edges.

1-Gang Self-Closing Lids

Product Description	Mounting	Gray Catalog No.	Other Colors Catalog No.	Color Suffix	UL	SR
Single Receptacle	Horizontal	<input type="checkbox"/> S1951	<input type="checkbox"/> S1951__	W	•	•
Duplex Receptacle/Combination Device, 2 Self-Closing Lids	Horizontal	<input type="checkbox"/> S1952	<input type="checkbox"/> S1952__	W	•	•
Oversize Duplex Receptacle/Combination Device	Horizontal	<input type="checkbox"/> S1954*	—		•	•
Duplex Receptacle	Vertical	<input type="checkbox"/> S2962	<input type="checkbox"/> S2962__	W	•	•
	Horizontal	<input type="checkbox"/> S3962	<input type="checkbox"/> S3962__	W	•	•
GFCI/Decorator	Vertical	<input type="checkbox"/> S2966	<input type="checkbox"/> S2966__	W	•	•
	Horizontal	<input type="checkbox"/> S3966	<input type="checkbox"/> S3966__	BK, W	•	•

For ordering devices other than gray, include Cat. No. followed by the color code: BK (Black), W (White)
 * Not CSA

Non-Metallic Weatherproof Switch Cover

FEATURES

- Switch lockable in “on” or “off” position.
- Red switch handle for easy visual location.
- Meets 2008 NEC® 404.4.
- Factory-attached gasket to cover minimizes labor for installer.

1-Gang Lids

Product Description	Mounting	Catalog No.	Color	UL	SR
1-Gang Flush Mount Switch Cover	Vertical	<input type="checkbox"/> S2983	Gray	•	•

Non-Metallic Protective Receptacle Covers

FEATURES

- Not for use in wet locations.
- Tough plastic construction resistant to high impact.
- Non-corrosive and non-conductive.
- Gasket provided seals both device and openings and edges.

1-Gang Stay Open Lids

Product Description	Mounting	Gray Catalog No.	Other Colors Catalog No.	Color Suffix	UL	SR
Single Receptacle	Horizontal	<input type="checkbox"/> S1961*	<input type="checkbox"/> S1961__*	W	•	•
Duplex Receptacle/Combination Device	Horizontal	<input type="checkbox"/> S1962	<input type="checkbox"/> S1962__	W	•	•



For ordering devices other than gray, include Cat. No. followed by the color code: W (White)
 * Not CSA

Icon Key


NAFTA Compliant - see page O-30

Metal Weatherproof Covers

Metal 1- & 2-Gang Self-Closing Covers
1-Gang Blank Wallplates



S1987



Metal Weatherproof Covers - Wet Locations

FEATURES

- Meets 2008 NEC® 406.8 (A) and 406.8 (B)(2).
- Gasket provided seals both device openings and edges.
- Electrostatically painted with a baked, weather-resistant powder coat finish for exceptional durability.

1-Gang Self-Closing Lids

Product Description	Mounting	Color	Catalog No.	
Single Receptacle	Horizontal	Gray	<input type="checkbox"/> S992	•
Duplex Receptacle	Vertical	Gray	<input type="checkbox"/> S994	•
Duplex Receptacle, 2 Self-Closing Lids	Horizontal	Black	<input type="checkbox"/> S989BLK	•
	Horizontal	Gray	<input type="checkbox"/> S989	•
GFCI/Decorator Receptacle	Vertical	Gray	<input type="checkbox"/> S966	•
	Horizontal	Gray	<input type="checkbox"/> S1966	•
20A and 30A Hart-Lock™ Receptacles 1.625" (41.27mm) diameter opening	Vertical	Gray	<input type="checkbox"/> S993	•

1-Gang Blank Wallplate

Product Description	Mounting	Color	Catalog No.	
Blank Wallplate	Horizontal or Vertical	Gray	<input type="checkbox"/> S1987	•

Icon Key

NAFTA Compliant - see page O-30

Weatherproof Covers with Devices

Metal & Plastic
1-Gang Covers



5-15P

Metal Weatherproof Covers - Wet Locations


FEATURES

- UL Listed for wet locations (with cover closed for S3999).
- Meets 2008 NEC® 404.4.
- Ready for outdoor installation.
- Gasket seals both openings and edges.

1-Gang Metal Cover with Switch



Switch Rating	Description	Mounting	Color	Catalog No.	
10A, 125V "T"; 5A, 250V/AC	Single-Pole Toggle Switch with Metal Switch Cover	Vertical	Gray	□ S983	•
	3-Way Toggle Switch with Metal Switch Cover	Vertical	Gray	□ S984	•




S983

1-Gang Plastic Cover with Motor Base Inlet



Inlet Rating		NEMA	Description	Mounting	Color	Catalog No.	
A	V						
15	125	5-15P	Motor Base Inlet #5278 with Weatherproof Cover # 3963	Horizontal	Gray	□ S3999	•



S3999

Icon Key

NAFTA Compliant - see page O-30



Accessories for Specification Grade Receptacle Covers

Description	Catalog No.	
Cast FS Box	□ 1113	•
Non-Metallic FS Box	□ 6080	•



1113



6080


1-Gang Boxes

Cast Aluminum FS Boxes
Non-Metallic FS Boxes


Cast Aluminum Weatherproof FS Boxes

FEATURES

- Electrostatically painted with a baked, weather-resistant powder finish for exceptional durability.
- Accept single gang weatherproof cover and standard FS covers.
- UL Listed for wet and damp locations with appropriate cover installed.
- Mounting lugs provide strength and durability on any mounting surface.
- Raised knockout studs on back of box provide alternative means for wall mounting. Strike desired studs with sharp hammer blow for clean mounting holes.
- Easy access ground screw hole located inside back wall of box.
- Threaded outlets for conduit and connectors.
- Two closure plugs and mounting lugs furnished.



1113




1117


1-Gang FS Boxes




Description	End Openings	Back Openings	Catalog No.	
3 hole 0.50" (12.70mm) dia.	1-1	1	□ 1113	•
4 hole 0.50" (12.70mm) dia.	2-1	1	□ 1114	•
5 hole 0.50" (12.70mm) dia.	2-2	1	□ 1115	•
3 hole 0.75" (19.05mm) dia.	1-1	1	□ 1116	•
4 hole 0.75" (19.05mm) dia.	2-1	1	□ 1117	•
5 hole 0.75" (19.05mm) dia.	2-2	1	□ 1118	•




1113




1114




1115



1116



1117




1118

Non-Metallic Weatherproof FS Box

1-Gang FS Box

Product Description	Catalog No.	
Black FS Box with (2) 0.75" (19.05mm) IPS molded-in knockouts	□ 6080	•



6080

Icon Key

NAFTA Compliant - see page O-30

Weather Protective Boots



For Straight Blade & Locking Devices

Weather Protective Boots

FEATURES

- Neoprene resists oil, grease, and acids plus has long life properties.
- Flexible and easy to apply to plug or connector.
- Cord hole opening can be cut away for large diameter cords.

Plug and Connector Weather Protective Boots

Product May Be Used With:	Catalog No. Plug 	Catalog No. Connector 
15A and 20A, 2-pole, 3-wire straight blade AutoGrip™, Safety Grip™ devices	<input type="checkbox"/> BS1	<input type="checkbox"/> BS2
15A industrial locking devices	<input type="checkbox"/> BS1	<input type="checkbox"/> BS2
20A 2-wire industrial locking devices	<input type="checkbox"/> BS1	<input type="checkbox"/> BS2
20A and 30A 2-pole, 3-wire and 3-pole, 3-wire locking Safety Grip™ devices	<input type="checkbox"/> BM1	<input type="checkbox"/> BM2
20A and 30A 3-wire Industrial locking devices for use with hull inlets	—	<input type="checkbox"/> BM3
20A and 30A 4-wire and 5-wire industrial locking devices	<input type="checkbox"/> BL1	<input type="checkbox"/> BL2
Midget locking ML2 plugs and connectors when used with receptacle or inlet	<input type="checkbox"/> 74CM40 •	<input type="checkbox"/> 74CM40 •



BS1




BM1



BM2

50A Armored Plug and Connector Weather Protective Boots

Product Description	Catalog No. 
Short boot, for 50A armored connector when used with 50A armored plug in 7717 boot	<input type="checkbox"/> 7716
Long boot, for 50A armored plug when used with receptacle or 50A armored connector in 7716 boot	<input type="checkbox"/> 7717



7716



7717

Icon Key

 NAFTA Compliant - see page O-30