

Temporary Power Solutions



	Page		Page
Temporary Power Distribution	L-1	Portable Outlet Boxes	L-9
Temporary Power Centers, 50A Input		Portable Outlet Boxes	
RhinoBoxes™, 20A, 30A, 50A Output	L-2	Standard Depth	L-10
Temporary Power Accessories		Extra Depth	L-10
50A Cord Sets	L-3	Extra Depth Feed-Through	L-10
50A Adapters	L-3	Portable Outlet Box Cover Plates	
RhinoBox Replacement Components		Cover Plates	L-10
GFCIs	L-3	Flip Lid Cover Plates	L-10
20A Straight Blade Receptacles	L-3	Portable Outlet Box & Cover Plate Assemblies	
20A Locking Receptacles	L-3	Standard Depth Boxes	L-10
30A Locking Receptacles	L-3	Extra Depth Boxes	L-10
50A Inlets, Outlets & Flip Covers	L-3	Extra Depth Feed-Through Boxes	L-10
Industrial Grade Portable GFCIs	L-4	Specification Information	L-11
15A Portable GFCIs			
Plug Series, Single or Tri-Tap Connector	L-5		
Plug Series, Field Wireable	L-5		
Inline Series, Single or Tri-Tap Connector	L-5		
Inline Series, Field Wireable	L-5		
20A Portable GFCIs			
Inline Series, Field Wireable	L-6		
Inline Series, Molded Plug & Connector	L-6		
30A Portable GFCIs			
Inline Series, Field Wireable, Single Phase	L-7		
Inline Series, Molded Plug & Connector	L-7		
Watertight Portable GFCIs			
15A Straight Blade NEMA 5-15	L-8		
20A Straight Blade NEMA 5-20	L-8		
20A Locking NEMA L5-20	L-8		
20A Locking NEMA L6-20	L-8		
30A Locking NEMA L5-30	L-8		
30A Locking NEMA L6-30	L-8		

Safe and reliable power distribution

Arrow Hart's complete line of heavy duty temporary power devices are built tough to deliver safe, reliable temporary power for the most demanding commercial and industrial applications.



Temporary Power Distribution

Arrow Hart's heavy duty RhinoBox temporary power distribution centers provide "plug & power" capability, multiple configuration options, and automatic or manual GFCI reset versions for reliable temporary power.



Cordsets, Plugs & Connectors

The rugged line of 50A Pro-Grip™ plugs, connectors, cordsets and adapters are engineered to provide safe, secure connections with fast installation, superior performance and outstanding durability.



Portable GFCIs

Portable GFCIs are specifically designed to protect personnel and equipment from ground fault hazards in indoor or outdoor jobsite applications.



Portable Outlet Boxes

Arrow Hart's durable portable outlet boxes provide a safe alternative to common metal junction boxes and are especially useful for pendant station drops and stringer sets.

**Mission critical power when
and where you need it**

RhinoBox™ heavy duty temporary power centers are designed to deliver safe and reliable temporary power on industrial and commercial jobsites.




RhinoBox
Temporary Power Center

Gasketed lift covers provide superior protection from the elements

Weather Resistant “WR” duplex receptacles comply with NEC 406.8 requirements for outdoor temporary power applications

Individual GFCI modules protect against ground faults

Sturdy heavy duty steel legs are reinforced to withstand abuse and provide long lasting performance

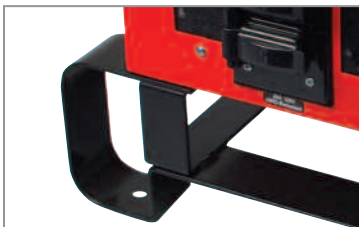

Holes in legs accept 3/8" castor bolts and allows RhinoBox to be attached to fixed surfaces



Unique interlocking legs provide sturdy and secure stacking for storage and transport



Variety of cordsets, adapters and replacement devices available to service any application



Hinged clear polycarbonate door cover provides access and visibility to circuit breakers



Temporary Power Centers with GFCI Protection

50A Input
20A, 30A, 50A Output
120/240V/AC (Max.)


Temporary Power Centers

RhinoBox NEMA 3R



RB300M

Rating A	V/AC	Distribution Devices	Receptacle Rating	Protection Overload	GFCI	Catalog No.*	
50 (Max.)	120/240	(6) WR Duplex Receptacles	20A, 125V	✓	✓	<input type="checkbox"/> RB300M	•
		(1) Locking Receptacle	30A, 250V	✓	-		
		(1) Locking Inlet	50A, 125/250V	-	-		
		(1) Locking Outlet	50A, 125/250V	-	-		
50 (Max.)	120/240	(6) Single Receptacles	20A, 125V	✓	✓	<input type="checkbox"/> RB301M	•
		(1) Locking Receptacle	30A, 250V	✓	-		
		(1) Locking Inlet	50A, 125/250V	-	-		
		(1) Locking Outlet	50A, 125/250V	-	-		
50 (Max.)	120/240	(6) Locking Receptacles	20A, 125V	✓	✓	<input type="checkbox"/> RB302M	•
		(1) Locking Receptacle	30A, 250V	✓	-		
		(1) Locking Inlet	50A, 125/250V	-	-		
		(1) Locking Outlet	50A, 125/250V	-	-		
50 (Max.)	120/240	(3) Single Receptacles	20A, 125V	✓	✓	<input type="checkbox"/> RB303M	•
		(3) Locking Receptacles	20A, 125V	✓	✓		
		(1) Locking Receptacle	30A, 250V	✓	-		
		(1) Locking Inlet	50A, 125/250V	-	-		
		(1) Locking Outlet	50A, 125/250V	-	-		
50 (Max.)	120/240	(7) WR Duplex Receptacles	20A, 125V	✓	✓	<input type="checkbox"/> RB3001M	•
		(1) Locking Inlet	50A, 125/250V	-	-		
		(1) Locking Outlet	50A, 125/250V	-	-		
50 (Max.)	120/240	(7) Locking Receptacles	20A, 125V	✓	✓	<input type="checkbox"/> RB3021M	•
		(1) Locking Inlet	50A, 125/250V	-	-		
		(1) Locking Outlet	50A, 125/250V	-	-		



*Automatic GFCI reset configurations are available. When ordering automatic GFCI reset RhinoBox replace "M" in Catalog No. with "A". Example: RB300A = Automatic; RB300M = Manual.

NEMA 1 configurations are available. To order, replace "3" in Catalog No. with "2" for NEMA 1 enclosure. Example: RB300M = NEMA 3R; RB200M = NEMA 1.

Specification Information:

RhinoBox: L-11

Icon Key

NAFTA Compliant - see page O-30



Temporary Power Accessories

50A Input
20A, 30A, 50A Output
120V/240V/AC (Max.)

Temporary Power Accessories

FEATURES

- Connect RhinoBox to power sources and to additional RhinoBoxes in series.
- Pro-Grip™ tough nylon devices resist impact in heavy duty industrial environments.
- Powerful cord-gripping capability helps eliminate conductor cord grip slip and strain on terminals.
- Durable 6/4 SOOW cord.

Cordsets & Adapters

Rating A	V/AC	Cord Length	Description	Plug (Male)	Connector (Female)	Catalog No.	
50A	125/250	50 ft.	Non-NEMA 6/4 (6/3 & 8/1) Flexible Black Extension Cord			<input type="checkbox"/> PC50A	•
		100 ft.	Non-NEMA 6/4 (6/3 & 8/1) Flexible Black Extension Cord			<input type="checkbox"/> PC50B	•
50A	125/250	4 ft.	Non-NEMA 6/4 (6/3 & 8/1) Flexible Black Blank/Bare Wire Connector	—		<input type="checkbox"/> PA50-6	•
50A	125/250	4 ft.	NEMA 14-30P to 50A Straight Blade to 50A Locking Non-NEMA Adapter			<input type="checkbox"/> A304WCSF	•
		4 ft.	NEMA 14-50P to 50A Straight Blade to 50A Locking Non-NEMA Adapter			<input type="checkbox"/> A504WCSF	•



PC50A

RhinoBox Replacement Components

Description	Catalog No.	
20A GFCI Module (Manual Reset)	<input type="checkbox"/> 20GFMODM	
20A GFCI Module (Automatic Reset)	<input type="checkbox"/> 20GFMODA	
20A 125V/AC NEMA 5-20 Industrial Locking Receptacle	<input type="checkbox"/> L520R	•
20A 125V/AC NEMA 5-20 Single Straight Blade Receptacle	<input type="checkbox"/> 1877BK	
30A 250V/AC NEMA L6-30 Industrial Locking Receptacle	<input type="checkbox"/> L630R	•
30A Locking Receptacle Flip Lid Cover	<input type="checkbox"/> WP2	
50A 125/250V/AC Non-NEMA Locking Inlet (For RB200 Models)	<input type="checkbox"/> CS6375	•
50A 125/250V/AC Non-NEMA Locking Inlet with Flip Lid (for RB300 Models)	<input type="checkbox"/> CS6376	•
50A 125/250V/AC Non-NEMA Locking Outlet	<input type="checkbox"/> CS6369	•
50A Locking Receptacle Flip Lid Cover	<input type="checkbox"/> 7788BK	•

Icon Key

NAFTA Compliant - see page O-30

Reliable GFCI protection in remote applications

Arrow Hart's complete offering of portable GFCIs provide electrical protection from ground fault hazards on the jobsite.

**PowerTrip™ Portable GFCI**

Electro-magnetically latched contacts will not delatch in rough use conditions

Dual indication lights display power and fault status

Double insulated user interface provides added safety for user

Industrial design and materials are UV and chemical resistant - ideal for use in rough industrial environments

Heavy duty cable, plug and connector provide reliable connection



Convenient plug series available with flying leads, single or tri-tap connector



Available in a variety of cord lengths, with terminated devices or flying leads for field terminations



Variety of straight blade and locking plug and connector options, including watertight devices



Available with Manual or Automatic GFCI reset options

Industrial Grade 15A Portable GFCIs

2-Pole, 3-Wire Grounding
15A, 120V/AC

15A Portable GFCIs, Plug Series

Plug Series - Single & Tri-Tap Connector



Rating A	V/AC	NEMA	NEMA Type	Connector Style	Cord Length	Cord Gauge	Catalog No.*
15	120	5-15	3R	Single-Tap	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFP11M1P3
			3R	Tri-Tap	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFP11M1P9
		5-15	3R	Single-Tap	25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFP11M4P3
			3R	Tri-Tap	25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFP11M4P9

*Automatic reset GFCIs are also available. When ordering an automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFP11A1P3 = Automatic; GFP11M1P3 = Manual.

Plug Series - Field Wireable



Rating A	V/AC	NEMA	NEMA Type	Connector Style	Cord Length	Cord Gauge	Catalog No.*
15	120	5-15	3R	Flying Leads	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFP11MNP

*Automatic reset GFCIs are also available. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFP11ANP = Automatic; GFP11MNP = Manual.

Plug Series - Single Receptacle



Rating A	V/AC	NEMA	Description	Catalog No.
15	120	5-15	Single Outlet Adapter	<input type="checkbox"/> GFP400

15A Portable GFCIs, Inline Series

Inline Series - Single & Tri-Tap Connector



Rating A	V/AC	NEMA	NEMA Type	Connector Style	Cord Length	Cord Gauge	Catalog No.*
15	120	5-15	3R	Single-Tap	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI11M133
			3R	Tri-Tap	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI11M139
		5-15	3R	Single-Tap	6' (1.83 m)	12/3 AWG	<input type="checkbox"/> GFI11M233
			3R	Tri-Tap	6' (1.83 m)	12/3 AWG	<input type="checkbox"/> GFI11M239
		5-15	3R	Single-Tap	25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI11M433
			3R	Tri-Tap	25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI11M439
		5-15	3R	Single-Tap	50' (15.24m)	12/3 AWG	<input type="checkbox"/> GFI11M633
			3R	Tri-Tap	50' (15.24m)	12/3 AWG	<input type="checkbox"/> GFI11M639

*Automatic reset GFCIs also available. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFI11A133 = Automatic; GFI11M133 = Manual.

Inline Series - Field Wireable



Rating A	V/AC	NEMA	NEMA Type	Connector Style	Cord Length	Cord Gauge	Catalog No.
15	120	5-15	3R	-	1' (0.3m)	12/3 AWG	<input type="checkbox"/> GFI11MN3*
15	120	5-15	-	-	-	12-18 AWG	<input type="checkbox"/> GFP100-B**

*Automatic reset GFCIs are also available. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFI11AN3 = Automatic; GFI11MN3 = Manual.

**UL and CSA certified only.

Accessories for 15A Portable GFCIs



Description	Catalog No.
20A 125V/AC NEMA 5-20, Duplex Straight Blade Receptacle - Black	<input type="checkbox"/> BR20BK
Standard Depth, Portable Outlet Box With Cover Plates	<input type="checkbox"/> WD3059-DDN



GFP11M1P3



GFP400



GFI11M133



GFI11MN3



GFP100-B



WD3059-DDN



BR20BK

Specification Information:
15A Portable GFCIs: L-12
GFP400 & GFP100-B: G-16

Industrial Grade 20A Portable GFCIs

2-Pole, 3-Wire Grounding
20A, 120V/AC
20A, 240V/AC

20A Portable GFCIs, Inline Series

Inline Series - Field Wireable



Rating A	V/AC	NEMA	NEMA Type	Connector Style	Cord Length	Cord Gauge	Catalog No.*	
20	120	N/A	4X	Flying leads	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI12M1NN	
			4X	Flying leads	6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI12M2NN	
			4X	Flying leads	25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI12M4NN	
			4X	Flying leads	50' (15.24m)	12/3 AWG	<input type="checkbox"/> GFI12M6NN	
20	240	N/A	4X	Flying leads	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI22M1NN	
			4X	Flying leads	6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI22M2NN	
			4X	Flying leads	25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI22M4NN	
			4X	Flying leads	50' (15.24m)	12/3 AWG	<input type="checkbox"/> GFI22M6NN	



GFI12M1NN

*Automatic reset GFCIs are also available and are NAFTA compliant. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFI12A1NN = Automatic; GFI12M1NN = Manual.



GFI12M133

Inline Series - Molded Plug & Connector



Rating A	V/AC	NEMA	NEMA Type	Plug & Connector Style	Cord Length	Cord Gauge	Catalog No.*	
20	120	5-20	4X	Molded straight blade	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI12M133	
			4X	Molded locking	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI12M144	
20	240	L6-20	4X	Molded locking	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI22M144	

*Automatic reset GFCIs are also available and are NAFTA compliant. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFI12A133 = Automatic; GFI12M133 = Manual.

Icon Key

NAFTA Compliant - see page O-30

Accessories for 20A Portable GFCIs

Description	Catalog No.	
15A 125V/AC NEMA 5-15 Watertight Plug	<input type="checkbox"/> 14W47	
15A 125V/AC NEMA 5-15 Watertight Connector	<input type="checkbox"/> 15W47	
Standard Depth Portable Outlet box with Flip Lids	<input type="checkbox"/> WD3059-DDW	
20A 125V/AC NEMA 5-20 Duplex Straight Blade Receptacle - Black	<input type="checkbox"/> BR20BK	
20A 125V/AC NEMA L5-20 Industrial Receptacle	<input type="checkbox"/> CWL520R	



15W47



WD3059-DDW



BR20BK



CWL520R

Specification Information:
20A Portable GFCIs: L-12

**Industrial Grade
30A Portable
GFCIs**

2-Pole, 3-Wire Grounding
30A, 120V/AC; 30A, 208V/AC
30A, 240V/AC; 30A, 277V/AC

30A Portable GFCIs, Inline Series

Inline Series - Field Wireable, Single Phase



Rating A	V/AC	NEMA	NEMA Type	Connector Style	Cord Length	Cord Gauge	Catalog No.*
30	120	N/A	4X	Flying leads	2' (0.61m)	10/3 AWG	<input type="checkbox"/> GFI13M1NN
			4X	Flying leads	6' (1.83m)	10/3 AWG	<input type="checkbox"/> GFI13M2NN
			4X	Flying leads	25' (7.62m)	10/3 AWG	<input type="checkbox"/> GFI13M4NN
			4X	Flying leads	50' (15.24m)	10/3 AWG	<input type="checkbox"/> GFI13M6NN
			4X	Flying leads	100' (30.48m)	10/3 AWG	<input type="checkbox"/> GFI13M7NN
30	208	N/A	4X	Flying leads	2' (0.61m)	10/3 AWG	<input type="checkbox"/> GFI93M1NN
30	240	N/A	4X	Flying leads	2' (0.61m)	10/3 AWG	<input type="checkbox"/> GFI23M1NN
			4X	Flying leads	6' (1.83m)	10/3 AWG	<input type="checkbox"/> GFI23M2NN
			4X	Flying leads	25' (7.62m)	10/3 AWG	<input type="checkbox"/> GFI23M4NN
			4X	Flying leads	50' (15.24m)	10/3 AWG	<input type="checkbox"/> GFI23M6NN
			4X	Flying leads	100' (30.48m)	10/3 AWG	<input type="checkbox"/> GFI23M7NN
30	277	N/A	4X	Flying leads	2' (0.61m)	10/3 AWG	<input type="checkbox"/> GFI3M1NN

*Automatic reset GFCIs are also available. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFI13A1NN = Automatic; GFI13M1NN = Manual.



GFI13M1NN

Inline Series - Molded Locking Plug & Connector



Rating A	V/AC	NEMA	NEMA Type	Plug & Connector Style	Cord Length	Cord Gauge	Catalog No.*
30	120	L5-30	4X	Molded locking	2' (0.61m)	10/3 AWG	<input type="checkbox"/> GFI13M144
30	240	L6-30	4X	Molded locking	2' (0.61m)	10/3 AWG	<input type="checkbox"/> GFI23M144

*Automatic reset GFCIs are also available. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFI13A144 = Automatic; GFI13M144 = Manual.



GFI13M144

Icon Key

NAFTA Compliant - see page O-30

Accessories for 30A Portable GFCIs

Description	Catalog No.
30A 125V/AC NEMA L5-30 Locking Plug	<input type="checkbox"/> CWL530P •
30A 125V/AC NEMA L5-30 Locking Connector	<input type="checkbox"/> CWL530C •
30A 125V/AC NEMA L5-30 Industrial Locking Receptacle	<input type="checkbox"/> CWL530R •
30A 125V/AC NEMA L6-30 Industrial Locking Receptacle	<input type="checkbox"/> CWL630R •
Standard Depth Portable Outlet Box	<input type="checkbox"/> WD3059 •



Specification Information:
30A Portable GFCIs: L-12

Watertight Portable GFCIs

2-Pole, 3-Wire Grounding
 15A, 120V/AC
 20A, 120V/AC; 20A, 240V/AC
 30A, 120V/AC; 30A, 240V/AC

Watertight Portable GFCIs

Inline Series - Watertight Plug and Connector Ends



GFI12M155

Rating A	V/AC	NEMA	NEMA Type	Plug & Connector Style	Cord Length	Cord Gauge	Catalog No.*			
15	120	5-15	3R	Straight Blade	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI11M155			
					6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI11M255			
					25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI11M455			
					50' (15.24m)	12/3 AWG	<input type="checkbox"/> GFI11M655			
20	120	5-20	4X	Straight Blade	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI12M155 •			
					6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI12M255			
					25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI12M455			
					L5-20	4X	Locking	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI12M166
								6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI12M266
								25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI12M466
20	240	L6-20	4X	Locking	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI22M166			
					6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI22M266			
					25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI22M466			
30	120	L5-30	4X	Locking	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI13M166			
					6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI13M266			
					25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI13M466			
30	240	L6-30	4X	Locking	2' (0.61m)	12/3 AWG	<input type="checkbox"/> GFI23M166			
					6' (1.83m)	12/3 AWG	<input type="checkbox"/> GFI23M266			
					25' (7.62m)	12/3 AWG	<input type="checkbox"/> GFI23M466			

*Automatic reset GFCIs are also available and are NAFTA compliant. When ordering automatic Portable GFCIs replace "M" in catalog number with "A". Example: GFI12A155 = Automatic; GFI12M155 = Manual.

Icon Key

NAFTA Compliant - see page O-30

Accessories for Watertight Portable GFCIs

Description	Catalog No.
20A 125V/AC NEMA 5-20 Watertight Single Straight Blade Receptacle	<input type="checkbox"/> 60W33 •
20A 125V/AC NEMA 5-20 Watertight Duplex Straight Blade Receptacle	<input type="checkbox"/> 60W33DPLX •
20A Plug Closure Cap	<input type="checkbox"/> 20PW •
20A 125V/AC NEMA L5-20 Watertight Locking Receptacle	<input type="checkbox"/> L520RW •
30A 125V/AC NEMA L5-30 Watertight Locking Receptacle	<input type="checkbox"/> L530RW •

Specification Information:

15A Watertight Portable GFCIs: L-12

20A Watertight Portable GFCIs: L-12

30A Watertight Portable GFCIs: L-12



60W33



60W33DPLX



20PW



L520RW



L530RW

**Built to withstand,
deliver and perform**

Arrow Hart's portable outlet boxes provide a safe, durable, code compliant non-metallic solution for portable power.



Portable Outlet Boxes

Innovative co-molded one-piece design incorporates integrated strain relief

Bonding strap ensures that device and box are bonded to the grounding conductor(s); required in Canada per CSA C22.2 no. 18-98

Non-conductive Alcryn® material provides protection against electric shock and long-term durability

Integral cover plate mounting holes reduce installation time

Variety of cover plates available with and without flip lids to accommodate any installation

Alcryn® is a registered trademark of Advanced Polymer Alloys, a subsidiary of Ferro Corporation.



Largest internal volume of any non-metallic outlet box for ease of wiring and maintenance



Available in pendant, extra depth and feed-through configurations, in yellow or black



Portable Outlet Box assemblies with boxes and cover plates available for easy ordering



Integrated strain relief system includes grommets to accommodate a wide range of cord sizes

Portable Outlet Boxes, Cover Plates & Assemblies

Standard Depth Box, Extra Depth Box
Feed-Through Box
Portable Outlet Box Covers

Portable Outlet Boxes, Cover Plates & Assemblies



WD3059



WD3099



Cover Plates



WD3059-DDN

Portable Outlet Boxes

Description	Color	Catalog No.	
Standard Depth	Yellow	<input type="checkbox"/> WD3059*	•
Extra Depth	Yellow	<input type="checkbox"/> WD3099*	•
Extra Depth Feed-Through	Yellow	<input type="checkbox"/> WD3090F*	•

*Also available in All-Black. For ordering, include Cat. No. followed by the color code: BK (Black). All Cooper Wiring Devices' Portable Outlet Boxes have compression fittings.

Portable Outlet Box Cover Plates

Description	Diameter Opening	Plate Color	Catalog No.	
Duplex Receptacle Cover Plate	—	Black	<input type="checkbox"/> WD3051BK	•
Single Receptacle Cover Plate	1.56" (39.6mm)	Black	<input type="checkbox"/> WD3052BK	•
Single Receptacle Cover Plate	1.39" (35.3mm)	Black	<input type="checkbox"/> WD3054BK	•
Decorator Style Cover Plate	—	Black	<input type="checkbox"/> WD3055BK	•
Decorator Style Cover Plate with Flip Lid	—	Black	<input type="checkbox"/> WD3056BK	•
Duplex Receptacle Cover Plate with Flip Lid	—	Black	<input type="checkbox"/> WD3060BK	•
Blank Cover Plate	—	Black	<input type="checkbox"/> WD3061BK	•

Portable Outlet Box & Cover Plate Assemblies

Outlet Box Type	with Cover Plates-Type	Box Color*	Catalog No.	
Standard Depth POB	(2) WD3051BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3059-DDN*	•
	(2) WD3060BK - With Flip Lids	Yellow	<input type="checkbox"/> WD3059-DDW*	•
	(2) WD3054BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3059-SSN*	•
	(2) WD3052BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3059-LLN*	•
Extra Depth POB	(2) WD3051BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3099-DDN*	•
	(2) WD3060BK - With Flip Lids	Yellow	<input type="checkbox"/> WD3099-DDW*	•
	(2) WD3054BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3099-SSN*	•
	(2) WD3052BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3099-LLN*	•
Extra Depth Feed-Through POB	(2) WD3051BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3090F-DDN*	•
	(2) WD3060BK - With Flip Lids	Yellow	<input type="checkbox"/> WD3090F-DDW*	•
	(2) WD3054BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3090F-SSN*	•
	(2) WD3052BK - No Flip Lids	Yellow	<input type="checkbox"/> WD3090F-LLN*	•

*Also available in All-Black. For ordering, include Cat. No. followed by the color code: BK (Black). Examples : WD3059BK, WD3059BK-DDN. All Cooper Wiring Devices' Portable Outlet Boxes have compression fittings.

Specification Information:

Portable Outlet Boxes, Covers & Assemblies: L-13

Icon Key

NAFTA Compliant - see page O-30

RhinoBox™ Temporary Power Centers

50A Input
20A, 30A, 50A Output
120/240V/AC (Max.)

	Device Type	NEMA 1 Enclosures RB200 Series, Automatic or Manual Reset	NEMA 3R Enclosures RB300 Series, Automatic or Manual Reset
	Input	50A, 120/240V/AC, 60Hz, 3-Pole, 4-Wire Grounding	50A, 120/240V/AC, 60Hz, 3-Pole, 4-Wire Grounding
	Testing & Code Compliance	<ul style="list-style-type: none"> • cETLus Listed for indoor use 	<ul style="list-style-type: none"> • cETLus Listed for indoor or outdoor use
		<ul style="list-style-type: none"> • Complies with NEC Articles 525 & 590 	<ul style="list-style-type: none"> • Complies with NEC Articles 525 & 590
		<ul style="list-style-type: none"> • Complies with OSHA Reg. 29CFR, Part 1926, Subpart K, 1926.404, GFCI requirements 	<ul style="list-style-type: none"> • Complies with OSHA Reg. 29CFR, Part 1926, Subpart K, 1926.404, GFCI requirements
		<ul style="list-style-type: none"> • Conforms to UL 1640 and CSA C22.2, no. 14 	<ul style="list-style-type: none"> • Conforms to UL 1640 and CSA C22.2, no. 14
Specifications: Environmental	Enclosure Type	NEMA 1	NEMA 3R
Specifications: Electrical	GFCI Protection for 20A Receptacles	Yes	Yes
	Overload Protection	Yes	Yes
Materials:	Enclosure	Cold-rolled 18 gauge steel	Cold-rolled 18 gauge steel
	Legs	Cold-rolled 10 gauge steel	Cold-rolled 10 gauge steel

**Industrial Grade
Portable GFCIs**

2-Pole, 3-Wire Grounding
15A, 120V/AC
20A, 120V/AC; 20A, 208V/AC; 20A, 240V/AC; 20A, 277V/AC
30A, 120V/AC; 30A, 208V/AC; 30A, 240V/AC; 30A, 277V/AC

	Device Type	15A Portable GFCIs Inline, Plug Series	20A Portable GFCIs Inline Series	30A Portable GFCIs Inline Series
	Connection Type	Molded plug & connector field wireable, or watertight plug & connector	Molded plug & connector, watertight plug & connector, or field wireable flying leads	Molded plug & connector, watertight plug & connector, or field wireable flying leads
	Testing & Code Compliance	<ul style="list-style-type: none"> cULus listed to UL943 	<ul style="list-style-type: none"> Plug & connector ends: cULus listed to UL943 Field wireable: UL recognized component for US & Canada 	<ul style="list-style-type: none"> Plug & connector ends: cULus listed to UL943 Field wireable: UL recognized component for US & Canada
		<ul style="list-style-type: none"> OSHA 29 CFR 1926.404 (b)(1)(ii) & OSHA 29 CFR 1926.405 (a)(2)(ii)(G) 	<ul style="list-style-type: none"> OSHA 29 CFR 1926.404 (b)(1)(ii) & OSHA 29 CFR 1926.405 (a)(2)(ii)(G) 	<ul style="list-style-type: none"> OSHA 29 CFR 1926.404 (b)(1)(ii) & OSHA 29 CFR 1926.405 (a)(2)(ii)(G)
		<ul style="list-style-type: none"> NEC 590.6, NEC 511.12, NEC 600.10, NEC 680.5, NEC 680.40 	<ul style="list-style-type: none"> NEC 590.6, NEC 511.12, NEC 600.10, NEC 680.5, NEC 680.40 	<ul style="list-style-type: none"> NEC 590.6, NEC 511.12, NEC 600.10, NEC 680.5, NEC 680.40
Specifications: Environmental	Enclosure Protection	NEMA 3R rated	NEMA 4X rated	NEMA 4X rated
	Temperature Rating	-35°C to 66°C (-31°F to 151°F)	-35°C to 66°C (-31°F to 151°F)	-35°C to 66°C (-31°F to 151°F)
Specifications: Electrical	Rated Supply Voltage	120V/AC	120V/AC, 208V/AC, 240V/AC, 277V/AC	120VAC, 208V/AC, 240V/AC, 277V/AC
	Rated Current/Current	Up to 15A or rating of wiring device and/or cable	Up to 20A or rating of wiring device and/or cable	Up to 30A or rating of wiring device and/or cable
	Ground Trip Current	4-6 mA	4-6 mA	4-6 mA
	Overload Current	90A @ 125V/AC	120A	180A
	Insulation Voltage	4000V – 1 minute	4000V – 1 minute	4000V – 1 minute
	Response Time	25 mS max.	25 mS max.	25 mS max.
	Let Go Voltage	N/A	60% rated voltage	60% rated voltage
Specifications: Mechanical	Reset Type	Manual or automatic	Manual or automatic	Manual or automatic
	Operating Frequency	60 Hz	60 Hz	60 Hz
	GFCI Type	Class A	Class A	Class A
	Endurance Operations	3,000 operations	3,000 operations	3,000 operations
	Switch Interference	N/A	Double insulated	Double insulated
	Latching Mechanism	N/A	Electro-magnetic	Electro-magnetic
Materials:	Body	Polycarbonate	Polycarbonate & ABS (Gray)	Polycarbonate & ABS (Gray)
	Cord	Heavy duty 12/3 SJTW cable	Heavy duty 12/3 SJEOW cable	Heavy duty 10/3 SJTOW cable

**Portable Outlet Boxes,
Cover Plates &
Assemblies**

Standard Depth Box, Extra Depth Box
Feed-Through Box
Portable Outlet Box Covers

	Device Type	Portable Outlet Boxes	Portable Outlet Box Cover Plates
	Color	Yellow or Black	Black
	Testing & Code Compliance	<ul style="list-style-type: none"> Assemblies UL Listed to UL514C, UL467 and UL50 Assemblies are NEMA Type 1 enclosures Assemblies CSA certified to C22.2 no. 18 and C22.2 no. 94 	<ul style="list-style-type: none"> Assemblies UL Listed to UL514C, UL467 and UL50 Assemblies are NEMA Type 1 enclosures Assemblies CSA certified to C22.2 no. 18 and C22.2 no. 94
Specifications: Environmental	Enclosure Type/Moisture Resistance	NEMA 1	N/A
	Physical & Contaminant Breakdown Resistance	Resistant to impact & shock, corrosion resistant, weather resistant, heat resistant, oil resistant, chemical resistant, resistant to breakdown from UV exposure	Resistant to impact & shock, corrosion resistant, weather resistant, heat resistant, oil resistant, chemical resistant, resistant to breakdown from UV exposure
	Flammability	Meets UL 94 requirements; V0 rated	Meets UL 94 requirements; V0 rated
	Temperature Rating	-35°C to 80°C (-32°F to 176°F)	-35°C to 80°C (-32°F to 176°F)
Specifications: Mechanical	Strain Relief Fitting	Compression fitting with gaskets to accommodate multiple cord diameters; diameter range #16/3 SO through #12/3 SO or 0.38" through 0.75"	N/A
	Grommet Accommodation	Standard depth box (3 grommets): Small: 14/3 & 16/3 SJO Medium: 16/3 SOW & 12/3 SJO Large: 14/3 SOW & 12/5 SOW Extra depth & feed-through box (2 grommets): Small: 12/3, 12/4, 12/5, 10/3 SOW Large: 10/4 & 10/5 SOW	N/A
Materials:	Body	Valox® Alcryn® for WD3059 Santoprene for WD3099 and WD3090F	Valox®

Alcryn® is a registered trademark of Advanced Polymer Alloys, a subsidiary of Ferro Corporation.
Valox® is a registered trademark of the GE Company.