



C

Wallplates & Weather Protective Covers


Our broad offering of wallplates are the final touch for any application and are available in standard size, mid-size and oversize. Choose from a variety of materials, colors and configurations to match any combination of device and décor. Weather protective covers are available in a wide selection of configurations to maintain the integrity of outdoor devices.



Standard
Size
Wallplates
C-7



Mid-Size
Wallplates
C-12



Oversize
Wallplates
C-17




Wallplate
Accessories
C-19



While-In-Use
Boxes
C-22




Weather
Protective
Covers
C-23

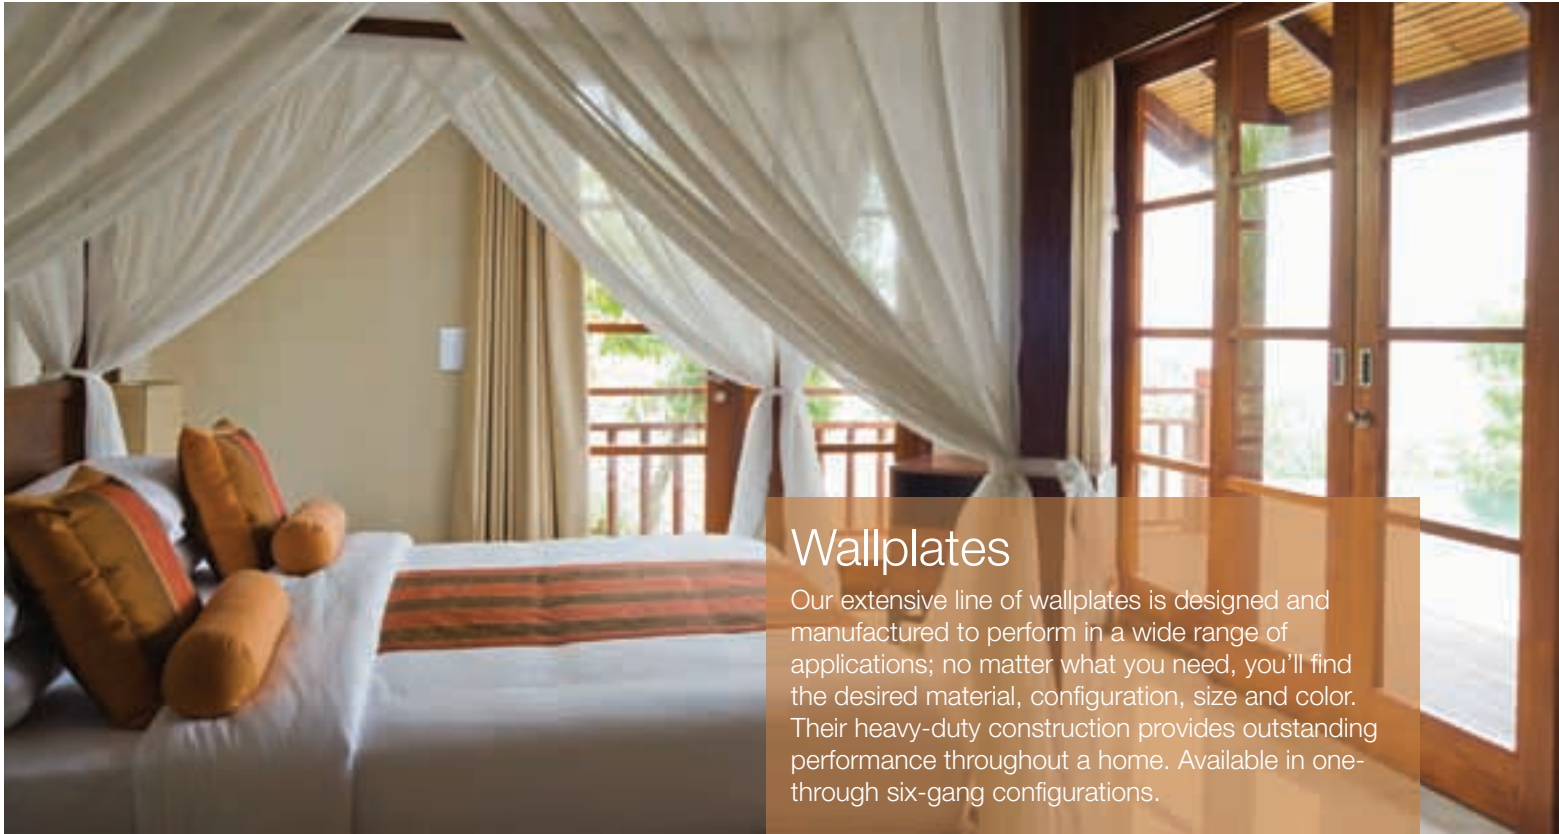


Wallplates

Our extensive line of wallplates is designed and manufactured to perform in a wide range of applications; no matter what you need, you'll find the desired material, configuration, size and color. Their heavy-duty construction provides outstanding performance throughout a home. Available in one-through six-gang configurations.


Wallplate Families

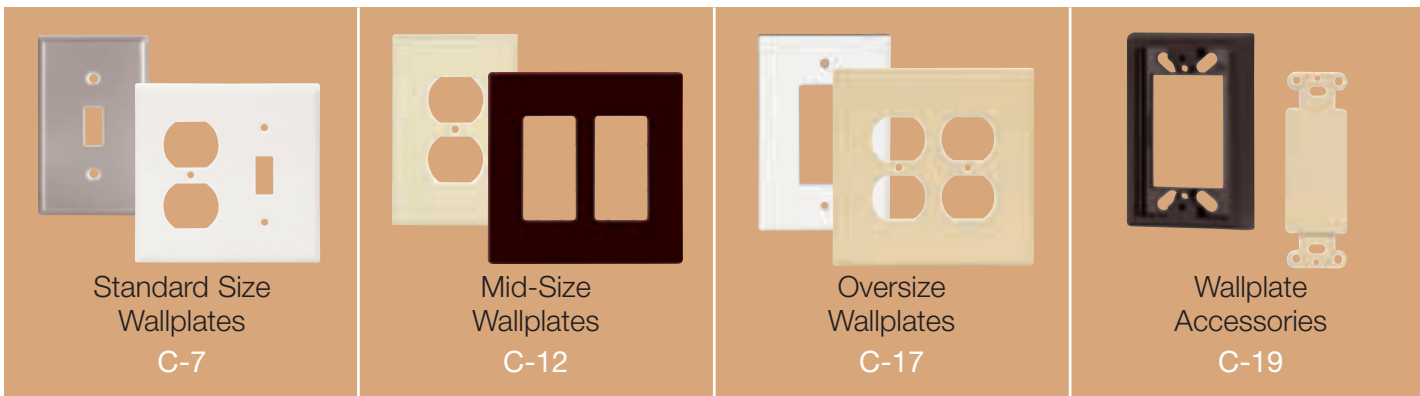

Wallplate Colors

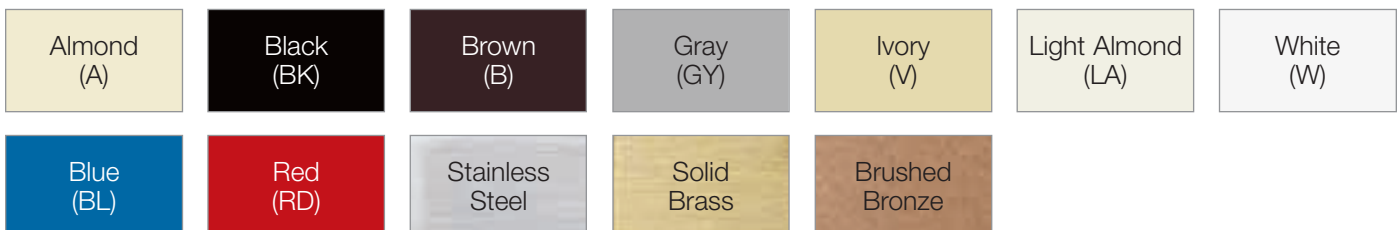

- 1 Mid-Size Screwless wallplates deliver the ultimate in designer looks with a screwless finish; they are fast and easy to install, virtually unbreakable and easy to clean
- 2 Mid-Size & Oversize wallplates are designed for use in applications where additional wall coverage is needed
- 3 Extra Depth wallplates are available for use with old work outlet boxes for a flush fit to the wall
- 4 Available wallplate materials include virtually unbreakable nylon & polycarbonate thermoplastics, 302/304 corrosion resistant stainless steel, solid brass and thermoset
- 5 Nylon & polycarbonate wallplates feature Screw-Catch™, a timesaving feature that holds mounting screws captive to simplify installation
- 6 Our wallplates are manufactured according to the performance & dimensional requirements of Federal Specification WP-455, NEMA Standard WD-1, UL Standard 514 and the NEC®

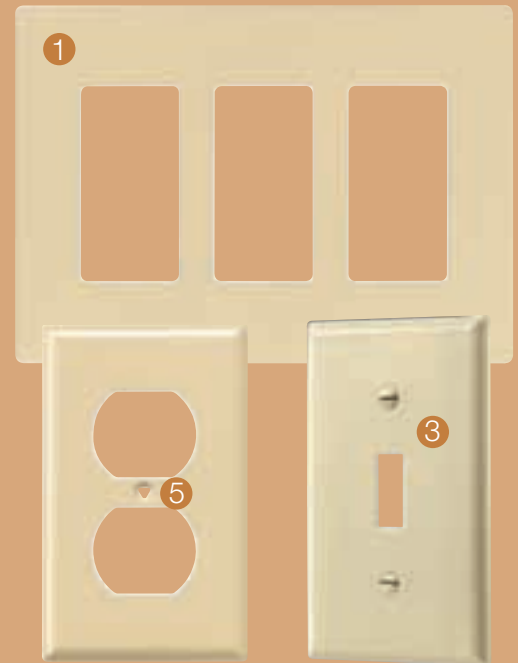

Specific Wallplate Solutions for Today's Needs



Aesthetic Upgrade

Our Screwless wallplates come in 3 different openings for upgrading the look of toggle switches, GFCIs, rotary dimmers and duplex receptacles without having to change out devices!




Shown:
PJS1

See
pages:
C-12
C-13
C-14



Corrosion Resistance

Solid Brass and Stainless Steel wallplates offer durable, elegant corrosion resistance ideal for high-moisture locations like kitchens, baths, garages and basements.



Shown:
93101

See
pages:
C-7 to
C-18



Impact Resistance

Thermoplastic polycarbonate and nylon wallplates are virtually unbreakable, warp resistant, abrasion resistant and soil resistant, making them ideal for high-traffic areas.



Shown:
PJ26

See
pages:
C-7 to
C-16

Thermoplastic Nylon or Polycarbonate Wallplates

FEATURES

- Rugged construction reduces installation cost due to less plate breakage and resists bowing to provide a smooth, flat installation.
- Exclusive timesaving Screw-Catch™ feature holds mounting screws captive and simplifies installation.
- High gloss finish is soil resistant.
- Nylon wallplates have a flush-fitting, warp resistant design.
- Polycarbonate wallplates are virtually unbreakable with high structural rigidity, long-term form retention, plus superior impact and abrasion resistance.

- Matching mounting screws provided.

TESTING & CODE COMPLIANCE

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

MATERIAL CHARACTERISTICS

- Flammability: Meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Thermoset Wallplates

FEATURES

- Extensive line of non-flammable thermoset plates provides flush-fitting, warp resistant performance.

TESTING & CODE COMPLIANCE

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

MATERIAL CHARACTERISTICS

- Flammability: Meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 65°C (-40°F to 149°F)



302/304 Stainless Steel Wallplates

FEATURES

- Superior non-corrosive and non-magnetic properties for applications needing protection from those elements.
- Stainless steel alloy contains 18% chromium and 8% nickel for corrosion resistance.
- Stamped from 0.032" (0.81mm) thick material.
- Horizontally satin-brushed surface finish resists finger prints.
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation.

- Matching stainless steel mounting screws provided.

TESTING & CODE COMPLIANCE

- Listed to UL514D, file no. E92122
- CSA certified to C22.2, no. 42.1

MATERIAL CHARACTERISTICS

- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Solid Brass Wallplates

FEATURES

- Line of handsomely crafted, elegant solid brass designs in 11 popular NEMA standard size configurations.
- Strong, corrosion resistant and coated with transparent lacquer to resist premature oxidation.
- Horizontally satin-brushed surface finish resists finger prints.
- Matching brass-plated steel screws resist damage during installation.
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation.

- Solid brass material is a 70/30 alloy (#26C), .040" (1.02mm) thick.

TESTING & CODE COMPLIANCE

- Listed to UL514D, file no. E92003

MATERIAL CHARACTERISTICS

- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Mounting Holes for Wallplates and Covers

Most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.


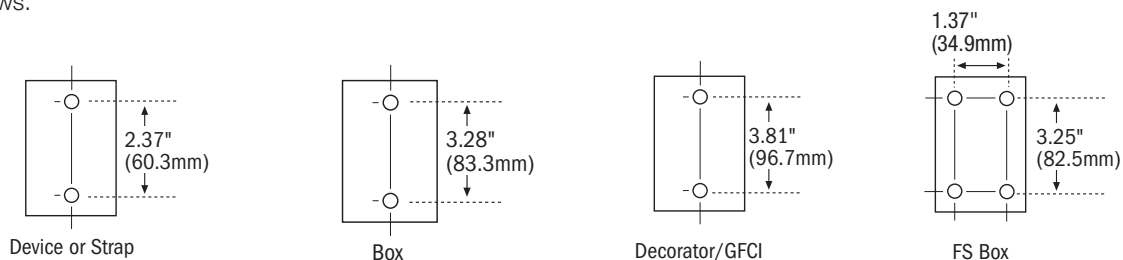



Plate and Cover Opening Dimensions

COVER OPENINGS

Nominal dimensions for plate and cover openings conform to industry standards and practices.



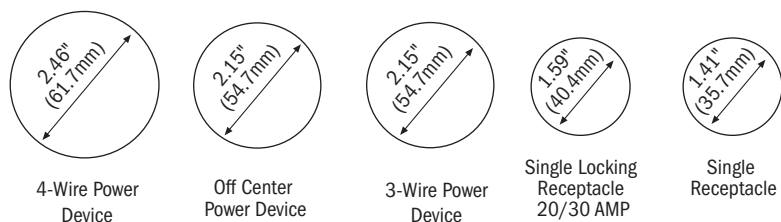


COMMON OPENING CONFIGURATIONS

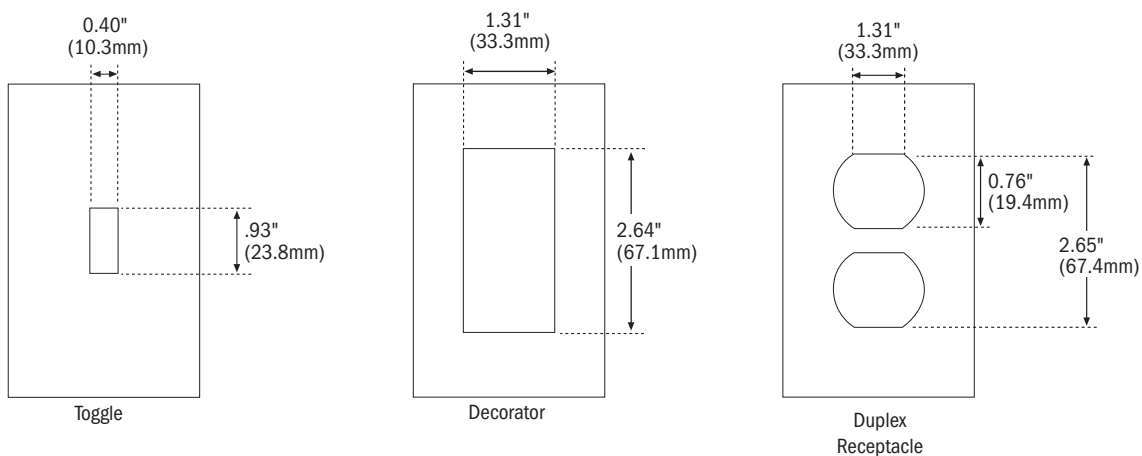

Wallplate Sizes

Description		Height	Width	First Gang to Edge	Gang to Gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (69.8mm)	1.37" (34.9mm)	—
	Mid-Size	4.87" (123.8mm)	3.13" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.4mm)	3.50" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.4mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.4mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.0mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.4mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-Size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)

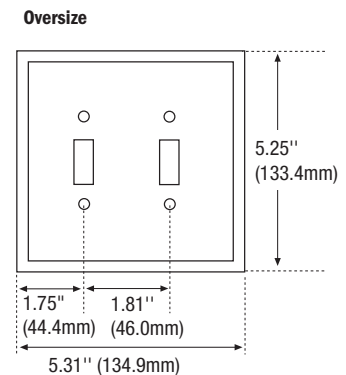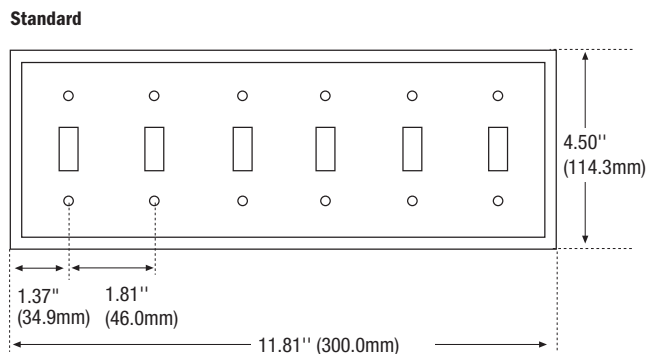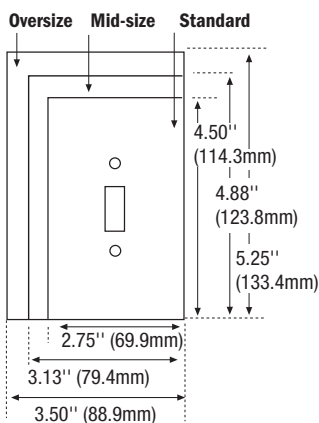


Toggle Switch


Description	Material	Color Suffix	Catalog No.	
1-Gang Toggle	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5134__	•
	Thermoset	A, B, LA, V, W	□ 2134__	•
	302/304 Stainless Steel	—	□ 93071	•
	Solid Brass	—	□ 94071	•
2-Gang Toggle	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5139__	•
	Thermoset	A, B, LA, V, W	□ 2139__	•
	302/304 Stainless Steel	—	□ 93072	•
	Solid Brass	—	□ 94072	•
3-Gang Toggle	Nylon	A, B, BK, GY, LA, V, W	□ 5141__	•
	Thermoset	A, B, LA, V, W	□ 2141__	•
	302/304 Stainless Steel	—	□ 93073	•
	Solid Brass	—	□ 94073	•
4-Gang Toggle	Nylon	A, B, BK, GY, LA, V, W	□ 5154__	•
	Thermoset	A, B, LA, V, W	□ 2154__	•
	302/304 Stainless Steel	—	□ 93074	•
5-Gang Toggle	Thermoset	A, B, LA, V, W	□ 2155__	•
	302/304 Stainless Steel	—	□ 93075	•
6-Gang Toggle	Thermoset	A, B, V, W	□ 2156__	•
	302/304 Stainless Steel	—	□ 93076	•




1-Gang




2-Gang




3-Gang



4-Gang




5-Gang




6-Gang

Duplex Receptacle


Description	Material	Color Suffix	Catalog No.	
1-Gang Duplex	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5132__	•
	Thermoset	A, B, LA, V, W	□ 2132__	•
	302/304 Stainless Steel	—	□ 93101	•
	Solid Brass	—	□ 94101	•
2-Gang Duplex	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5150__	•
	Thermoset	A, B, LA, V, W	□ 2150__	•
	302/304 Stainless Steel	—	□ 93102	•
	Solid Brass	—	□ 94102	•
3-Gang Duplex	302/304 Stainless Steel	—	□ 93103	•



1-Gang




2-Gang



3-Gang

Single Receptacle

Description	Material	Color Suffix	Catalog No.	
1-Gang Single Receptacle	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5131__	•
	Thermoset	A, B, LA, V, W	□ 2131__	•
	302/304 Stainless Steel	—	□ 93091	•
	Solid Brass	—	□ 94091	•



1-Gang

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com


 **NAFTA Compliant:** See page F-21




1-Gang




2-Gang




3-Gang



4-Gang



5-Gang



6-Gang

Decorator

Description	Material	Color Suffix	Catalog No.	
1-Gang Decorator	Nylon	A, B, BK, BL, GY, LA, RD, V, W	□ 5151__	•
	Thermoset	A, B, BK, GY, LA, V, W	□ 2151__	•
	302/304 Stainless Steel	—	□ 93401	•
	Solid Brass	—	□ 94401	•
2-Gang Decorator	Nylon	A, B, BK, GY, LA, V, W	□ 5152__	•
	Thermoset	A, B, BK, GY, LA, V, W	□ 2152__	•
	302/304 Stainless Steel	—	□ 93402	•
3-Gang Decorator	Thermoset	A, BK, LA, V, W	□ 2163__	•
	302/304 Stainless Steel	—	□ 93403	•
4-Gang Decorator	Thermoset	A, B, LA, V, W	□ 2164__	•
	302/304 Stainless Steel	—	□ 93404	•
5-Gang Decorator	Thermoset	A, B, LA, V, W	□ 2165__	•
	302/304 Stainless Steel	—	□ 93405	•
6-Gang Decorator	Thermoset	A, B, LA, V, W	□ 2166__	•
	302/304 Stainless Steel	—	□ 93406	•


Blank, Box Mounted




1-Gang



2-Gang



3-Gang



4-Gang

Description	Material	Color Suffix	Catalog No.	
1-Gang Blank	Nylon	A, B, BK, GY, LA, V, W	□ 5129__	•
	Thermoset	A, B, LA, V, W	□ 2129__	•
	302/304 Stainless Steel	—	□ 93151	•
	Solid Brass	—	□ 94151	•
2-Gang Blank	Nylon	A, B, BK, GY, LA, V, W	□ 5137__	•
	Thermoset	A, B, LA, V, W	□ 2137__	•
	302/304 Stainless Steel	—	□ 93152	•
3-Gang Blank	302/304 Stainless Steel	—	□ 93153	•
4-Gang Blank	302/304 Stainless Steel	—	□ 93154	•


Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)


Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com


NAFTA Compliant: See page F-21

Louvered

Description	Material	Color Suffix	Catalog No.	
1-Gang Horizontal Louver	302/304 Stainless Steel	—	<input type="checkbox"/> 93630	•
1-Gang Vertical Louver	302/304 Stainless Steel	—	<input type="checkbox"/> 93631	•




Horizontal



Vertical

Telephone & Coax

Description	Material	Color Suffix	Catalog No.	
1-Gang with 0.38" (9.5mm) Hole	Nylon	B, GY, V, W	<input type="checkbox"/> 5128__	•
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2128__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93696	•
1-Gang with 0.63" (15.9mm) Hole	Nylon	B, GY, V, W	<input type="checkbox"/> 5159__	•
	Thermoset	A, B, V, W	<input type="checkbox"/> 2159__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93591	•





0.38" Hole




0.63" Hole

Combination 2-Gang


Description	Material	Color Suffix	Catalog No.	
2-Gang Toggle & Duplex Receptacle	Nylon	A, B, BK, GY, LA, V, W	<input type="checkbox"/> 5138__	•
	Thermoset	A, B, GY, LA, V, W	<input type="checkbox"/> 2138__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93532	•
	Solid Brass	—	<input type="checkbox"/> 94532	•
2-Gang Toggle & Single Receptacle	302/304 Stainless Steel	—	<input type="checkbox"/> 93512	•
2-Gang Toggle & Decorator	Nylon	A, B, BK, GY, LA, V, W	<input type="checkbox"/> 5153__	•
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2153__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93432	•
	Solid Brass	—	<input type="checkbox"/> 94432	•
2-Gang Toggle & Blank	Nylon	A, B, BK, LA, V	<input type="checkbox"/> 5171__	•
2-Gang Duplex Receptacle & Blank	Nylon	A, B, BK, LA, V	<input type="checkbox"/> 5170__	•
2-Gang Duplex Receptacle & Decorator	Thermoset	A, LA, V, W	<input type="checkbox"/> 2157__	•




Toggle & Duplex Receptacle




Toggle & Single Receptacle




Toggle & Decorator



Toggle & Blank



Duplex Receptacle & Blank




Duplex Receptacle & Decorator

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)


Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com


 **NAFTA Compliant:** See page F-21



2 Toggles & Duplex Receptacle



2 Toggles & Decorator



3 Toggles & Duplex Receptacle



**1-Gang
1.59" Hole**



**1-Gang
2.15" Hole**



**2-Gang
2.15" Hole**



**2-Gang
2.28" Hole**



**2-Gang
2.47" Hole**

Combination 3-Gang

Description	Material	Color Suffix	Catalog No.	
3-Gang	Nylon	B, GY, V, W	<input type="checkbox"/> 5158__	•
2 Toggles & Duplex Receptacle	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2158__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93543	•
3-Gang	Thermoset	A, LA, V, W	<input type="checkbox"/> 2173__	•
2 Toggles & Decorator	302/304 Stainless Steel	—	<input type="checkbox"/> 93443	•

Combination 4-Gang

Description	Material	Color Suffix	Catalog No.	
4-Gang	Thermoset	A, LA, V, W	<input type="checkbox"/> 2174__	•
3 Toggles & Duplex Receptacle	302/304 Stainless Steel	—	<input type="checkbox"/> 93554	•

Power Outlet

Description	Material	Color Suffix	Catalog No.	
1-Gang with 1.59" (40.5mm) Hole	302/304 Stainless Steel	—	<input type="checkbox"/> 93111	•
1-Gang with 2.15" (54.8mm) Hole	Thermoset	A, B, V, W	<input type="checkbox"/> 2068__	•
2-Gang with 2.15" (54.8mm) Hole	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2168__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93227	•
2-Gang with 2.28" (57.9mm) Hole	302/304 Stainless Steel	—	<input type="checkbox"/> 93228	•
2-Gang with 2.47" (62.7mm) Hole	Nylon	V, W	<input type="checkbox"/> 5169__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93223	•

Standard Size Wallplate Guide for Power Devices

Power Device Catalog No.	Wallplate Catalog No.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263	2068, 2168, 93221, 93227

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), GY (Gray), LA (Light Almond), V (Ivory), W (White)

Dimensional Information: C-5 – C-6


Specification Information: Please visit www.cooperwiringdevices.com

NAFTA Compliant: See page F-21


Extra Depth*

Description	Material	Color Suffix	Catalog No.	
1-Gang Toggle	Thermoset	V, W	□ 4134__	•
1-Gang Duplex Receptacle	Thermoset	V, W	□ 4132__	•
2-Gang Toggle	Thermoset	V, W	□ 4139__	•
2-Gang Duplex Receptacle	Thermoset	V, W	□ 4150__	•
2-Gang Blank	Thermoset	V, W	□ 4137__	•
2-Gang Toggle & Duplex Receptacle	Thermoset	V, W	□ 4138__	•
2-Gang Toggle & Blank	Thermoset	V, W	□ 4171__	•
2-Gang Duplex Receptacle & Blank	Thermoset	V, W	□ 4170__	•


*Extra Depth Wallplates are approximately 10% deeper than standard size/standard depth counterparts.




**1-Gang Toggle
1-Gang Duplex
Receptacle**




**2-Gang Toggle
2-Gang Duplex
Receptacle**




2-Gang Blank



**2-Gang Toggle
& Duplex
Receptacle**



**2-Gang Blank &
Toggle**



**2-Gang Blank &
Duplex
Receptacle**

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: V (Ivory), W (White)

Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com


NAFTA Compliant: See page F-21




1-Gang




2-Gang




3-Gang



4-Gang



5-Gang



6-Gang

Toggle Switch


Description	Material	Color Suffix	Catalog No.	
1-Gang Toggle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ1__	
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2034__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93971	•
2-Gang Toggle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ2__	
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2039__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93972	•
3-Gang Toggle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ3__	
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2041__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93973	•
4-Gang Toggle	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ4__	
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2054__	•
5-Gang Toggle	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ5__	
6-Gang Toggle	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ6__	



1-Gang



2-Gang



3-Gang



4-Gang

Screwless Toggle Switch

Description	Material	Color Suffix	Catalog No.
1-Gang Toggle	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS1__
2-Gang Toggle	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS2__
3-Gang Toggle	Polycarbonate	A, LA, V, W	<input type="checkbox"/> PJS3__
4-Gang Toggle	Polycarbonate	A, LA, V, W	<input type="checkbox"/> PJS4__


Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BB (Brushed Bronze), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com


NAFTA Compliant: See page F-21

Duplex Receptacle

Description	Material	Color Suffix	Catalog No.	
1-Gang Duplex Receptacle	Polycarbonate	A, B, BK, BL, GY, LA, RD, V, W	<input type="checkbox"/> PJ8__	
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2032__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93901	•
2-Gang Duplex Receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ82__	
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2050__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93902	•



1-Gang



2-Gang


Screwless Duplex Receptacle

Description	Material	Color Suffix	Catalog No.
1-Gang Duplex Receptacle	Polycarbonate	A, B, BB, BK, LA, V, W	<input type="checkbox"/> PJS8__



1-Gang

Single Receptacle

Description	Material	Color Suffix	Catalog No.	
1-Gang with 1.41" (35.7mm) Hole	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2031__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93991	•




1-Gang

Decorator


Description	Material	Color Suffix	Catalog No.	
1-Gang Decorator	Polycarbonate	A, B, BK, BL, GY, LA, RD, V, W	<input type="checkbox"/> PJ26__	
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2051__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93934	•
2-Gang Decorator	Polycarbonate	A, B, BK, BL, GY, LA, RD, V, W	<input type="checkbox"/> PJ262__	
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2052__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93935	•
3-Gang Decorator	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ263__	
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2063__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93936	•
4-Gang Decorator	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ264__	
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2064__	•
5-Gang Decorator	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ265__	
6-Gang Decorator	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ266__	




1-Gang




2-Gang




3-Gang



4-Gang



5-Gang



6-Gang

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BB (Brushed Bronze), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)
Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com


 **NAFTA Compliant:** See page F-21




1-Gang




2-Gang




3-Gang



4-Gang



5-Gang



6-Gang

Screwless Decorator

Description	Material	Color Suffix	Catalog No.
1-Gang Decorator	Polycarbonate	A, B, BB, BK, GY, LA, V, W	<input type="checkbox"/> PJS26__
2-Gang Decorator	Polycarbonate	A, B, BB, BK, GY, LA, V, W	<input type="checkbox"/> PJS262__
3-Gang Decorator	Polycarbonate	A, BK, BB, LA, V, W	<input type="checkbox"/> PJS263__
4-Gang Decorator	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS264__
5-Gang Decorator	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS265__
6-Gang Decorator	Polycarbonate	A, BK, LA, V, W	<input type="checkbox"/> PJS266__




1-Gang



2-Gang

Blank, Box & Strap Mounted

Description	Material	Color Suffix	Catalog No.	
1-Gang Blank, Box Mounted	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ13__	
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2029__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93951	•
1-Gang Blank, Strap Mounted	Polycarbonate	A, B, BK, LA, V, W	<input type="checkbox"/> PJ14__	
2-Gang Blank, Box Mounted	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ23__	
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2037__	•
2-Gang Blank, Strap Mounted	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ24__	


Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BB (Brushed Bronze), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com

 **NAFTA Compliant:** See page F-21

Telephone & Coax

Description	Material	Color Suffix	Catalog No.	
1-Gang with 0.38" (9.5mm) Hole	Thermoset	V, W	<input type="checkbox"/> 2028	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93996	•
1-Gang with 0.40" (10.2mm) Hole, Box Mounted	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ11	
1-Gang with 0.40" (10.2mm) Hole, Box Mounted	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ12	





0.38" Hole




0.40" Hole

Combination 2-Gang


Description	Material	Color Suffix	Catalog No.	
2-Gang Toggle & Duplex Receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ18	
	Thermoset	A, B, LA, V, W	<input type="checkbox"/> 2038	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93932	•
2-Gang Toggle & Decorator	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ126	
	Thermoset	A, LA, V, W	<input type="checkbox"/> 2053	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93937	•
2-Gang Toggle & Blank	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ113	
2-Gang Duplex Receptacle & Blank	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ138	
2-Gang Duplex Receptacle & Decorator	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ826	




Toggle & Duplex Receptacle




Toggle & Decorator



Toggle & Blank




Duplex Receptacle & Blank




Duplex Receptacle & Decorator

Combination 3-Gang

Description	Material	Color Suffix	Catalog No.
3-Gang 2 Toggles & Duplex Receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ28
3-Gang 2 Toggles & Decorator	Polycarbonate	A, B, BK, GY, LA, V, W	<input type="checkbox"/> PJ226



2 Toggles & Duplex Receptacle



2 Toggles & Decorator

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)
Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com

 **NAFTA Compliant:** See page F-21



**1-Gang
1.40" Hole**



**1-Gang
1.59" Hole**




**1-Gang
2.15" Hole**



**2-Gang
2.15" Hole**


Power Outlet

Description	Material	Color Suffix	Catalog No. 
1-Gang with 1.40" (35.7mm) Hole	Polycarbonate	A, B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ7 __
1-Gang with 1.59" (40.5mm) Hole	Polycarbonate	B, GY, V, W	<input type="checkbox"/> PJ720 __
1-Gang with 2.15" (54.6mm) Hole	Polycarbonate	B, BK, V, W	<input type="checkbox"/> PJ724 __
	Nylon	V	<input type="checkbox"/> 5068 __ •
2-Gang with 2.15" (54.6mm) Hole	Polycarbonate	B, V, W	<input type="checkbox"/> PJ703 __


Mid-Size Wallplate Guide for Power Devices

Power Device Catalog No.	Wallplate Catalog No.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263	5068, PJ724, PJ703


Center End




Toggle




Decorator



**Duplex
Receptacle**



Blank



**Single
Receptacle**

Sectional Wallplates

Description	Material	Location	Color Suffix	Catalog No.
1-Gang Toggle	Polycarbonate	Center	V, W	<input type="checkbox"/> STC1 __
	Polycarbonate	End	V, W	<input type="checkbox"/> STE1 __
1-Gang Decorator	Polycarbonate	Center	V, W	<input type="checkbox"/> STC26 __
	Polycarbonate	End	V, W	<input type="checkbox"/> STE26 __
1-Gang Duplex Receptacle	Polycarbonate	Center	V, W	<input type="checkbox"/> STC8 __
	Polycarbonate	End	V, W	<input type="checkbox"/> STE8 __
1-Gang Blank	Polycarbonate	Center	V, W	<input type="checkbox"/> STC14 __
	Polycarbonate	End	V, W	<input type="checkbox"/> STE14 __
1-Gang Single Receptacle 1.40" (35.7mm) Hole	Polycarbonate	Center	V, W	<input type="checkbox"/> STC7 __
	Polycarbonate	End	V, W	<input type="checkbox"/> STE7 __


Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com


 **NAFTA Compliant:** See page F-21

Toggle Switch


Description	Material	Color Suffix	Catalog No.	
1-Gang Toggle	Thermoset	A, B, LA, V, W	□ 2144__	•
	302/304 Stainless Steel	—	□ 93871	•
2-Gang Toggle	Thermoset	A, B, LA, V, W	□ 2149__	•
	302/304 Stainless Steel	—	□ 93872	•
3-Gang Toggle	Thermoset	V, W	□ 2741__	•
	302/304 Stainless Steel	—	□ 93873	•
4-Gang Toggle	302/304 Stainless Steel	—	□ 93874	•




1-Gang



2-Gang




3-Gang




4-Gang

Duplex Receptacle

Description	Material	Color Suffix	Catalog No.	
1-Gang Duplex Receptacle	Thermoset	A, B, LA, V, W	□ 2142__	•
	302/304 Stainless Steel	—	□ 93801	•
2-Gang Duplex Receptacle	Thermoset	V, W	□ 2750__	•
	302/304 Stainless Steel	—	□ 93802	•




1-Gang



2-Gang


Single Receptacle

Description	Material	Color Suffix	Catalog No.	
1-Gang with 1.40" (35.7mm) Hole	Thermoset	V, W	□ 2731__	•
	302/304 Stainless Steel	—	□ 93891	•



1-Gang

Decorator

Description	Material	Color Suffix	Catalog No.	
1-Gang Decorator	Thermoset	V, W	□ 2751__	•
	302/304 Stainless Steel	—	□ 93834	•



1-Gang

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), LA (Light Almond), V (Ivory), W (White)


Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com

 **NAFTA Compliant:** See page F-21



1-Gang



2-Gang

Blank, Box Mounted


Description	Material	Color Suffix	Catalog No.	
1-Gang Blank	Thermoset	V, W	<input type="checkbox"/> 2729__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93851	•
2-Gang Blank	302/304 Stainless Steel	—	<input type="checkbox"/> 93852	•



0.38" Hole

Telephone & Coax

Description	Material	Color Suffix	Catalog No.	
1-Gang with 0.38" (9.5mm) Hole	Thermoset	V, W	<input type="checkbox"/> 2728__	•
	302/304 Stainless Steel	—	<input type="checkbox"/> 93896	•

Toggle & Duplex
Receptacle

Combination 2-Gang

Description	Material	Color Suffix	Catalog No.	
2-Gang Toggle & Duplex Receptacle	Thermoset	B, V, W	<input type="checkbox"/> 2148__	•


Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: B (Brown), V (Ivory), W (White)

Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com

NAFTA Compliant: See page F-21

Wallplate Accessories

Description	Finish/Material	Color Suffix	Catalog No.	
GFCI Extension Ring for use with GFCIs, 7/8" spacer, cULus Certified	Polypropylene	B, BLK, LA, V, W	<input type="checkbox"/> GFER __	
Adapter – Decorator to Blank	Polycarbonate	B, LA, V, W	<input type="checkbox"/> 2160 __	•
Adapter – Decorator to Toggle	Polycarbonate	V, W	<input type="checkbox"/> 2161 __	•
Toggle & Receptacle Wallplate Screws #6-32 x 1/2"	Metal, Baked Enamel Head	A, B, LA, V, W	<input type="checkbox"/> 231 __	
	Nylon	RD, V, W	<input type="checkbox"/> 232 __	•
Toggle & Receptacle Wallplate Screws #6-32 x 5/16"	Metal, Baked Enamel Head	LA, V, W	<input type="checkbox"/> 2231 __	



GFER



2161



231



 GFER: cULus Listed to UL514C, certified to CSA C22.2, no. 18-98

Louwer Wallplate Accessories

Description	Material	Catalog No.	
Recessed Pilot Light Lamp Holder with 6 Watt Clear S-6 Bulb	Urea	<input type="checkbox"/> 153	•



153


  Listed to UL496, file no. E18522; CSA certified to C22.2, no. 43

LED Steplight

Description	Color Suffix	Catalog No.
15A, 120V/AC LED Steplight, Includes Vertical & Horizontal Louvered Wallplates	A, LA, W	<input type="checkbox"/> 7739-BOX



7739-BOX

 cULus Listed to UL1598, file no. E328628; CSA certified to C22.2, no. 43

Color Ordering Information: For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BLK (Black), LA (Light Almond), RD (Red), V (Ivory), W (White)

Dimensional Information: C-5 – C-6

Specification Information: Please visit www.cooperwiringdevices.com

 **NAFTA Compliant:** See page F-21



Weather Protective Covers

Our wide line of weatherproof and weather protective products are designed for impact resistance, corrosion resistance, UV resistance and longevity in virtually any outdoor or indoor wet or damp location. They are ideal for patio and pool areas, decks, garages, seasonal lighting, house exterior and landscape service receptacles.

Weather Protective Cover Families



While-In-Use
Boxes
C-22



Weatherproof
Receptacle Covers
C-23



Weatherproof
Switch Covers
C-23



Weather Protective
Receptacle Covers
C-23

Weather Protective Cover Colors

Black
(BK)

Gray

White
(W)

- 1 While-In-Use boxes offer complete protection of electrical connections, even when cords are plugged in
- 2 Award-winning design offers superior functionality with patented polycarbonate movable hinges that permit easy horizontal or vertical mounting
- 3 Durable one-piece corrosion resistant polycarbonate cover offers additional strength and weather protection
- 4 Deep, see-through design of cover offers plenty of space for plugs and cords along with easy visual access
- 5 Easy to open/close with a lockable clasp
- 6 Pre-applied gasket makes it easy to mount box properly
- 7 Cord opening fits #12 AWG or lighter cords
- 8 Three easy-to-install molded insets for use with decorator devices, duplex or single receptacles, and toggle switches



Specific Weather Protective Cover Solutions for Today's Needs



Code Compliance

The 2011 NEC® Article 406.9 (B)(1) requires receptacles located outdoors on 1- or 2-family dwellings in wet locations to be installed in enclosures that are weatherproof with or without a plug inserted.



Shown:
WIU-1

See
page:
C-22



Weatherproof Switch Protection

Boat houses and lifts are challenging corrosive environments for switches that need to be protected, yet functional. Weather protective switch covers are also lockable for security.



Shown:
S2983

See
page:
C-23



"Protective Only" Covers

These covers offer "damp location" protection in partially protected outdoor areas such as covered open porches or gazebos and interior areas such as basements or barns.



Shown:
S1962

See
page:
C-23

WeatherBox™ While-In-Use Weather Protective Covers

1-Gang Self-Closing
2-Gang Self-Closing

FEATURES

- Meets 2011 NEC® 406.9 (B)(1) for 1- or 2-family dwellings.
- Rugged UV-resistant polycarbonate cover and back protects devices without cracking or breaking and is non-corrosive and non-conductive.
- Moveable hinges reposition easily for vertical or horizontal mounting.
- 1-Gang box includes 3 inserts for 16 different configurations.
- 2-Gang box includes 3 inserts for over 60 different configurations.
- Box inserts accommodate decorator devices, duplex receptacles, a variety of different single receptacle sizes and toggle switches.
- Exceeds UL outdoor low voltage landscape lighting requirements.
- Box cover includes pre-mounted gasket.
- Meets Canadian Electrical Code rule 26-702.



WIU-1

Standard Depth 1-Gang

3.25" (82.6mm) Depth

Description	# Of Avail. Configurations	Color	Catalog No.
Horizontal/ Vertical Mount	16	Gray	<input type="checkbox"/> WIU-1
Horizontal/ Vertical Mount	16	White	<input type="checkbox"/> WIU-1W

cULus Listed to UL514D, file no. E33216, certified to CSA C22.2 no. 42; meets NEMA 3R requirements



WIU-1D

Extra Depth 1-Gang

4.75" (120.7mm) Depth

Description	# Of Avail. Configurations	Color	Catalog No.
Horizontal/ Vertical Mount	16	Gray	<input type="checkbox"/> WIU-1D
Horizontal/ Vertical Mount	16	White	<input type="checkbox"/> WIU-1DW

cULus Listed to UL514D, file no. E33216, certified to CSA C22.2 no. 42; meets NEMA 3R requirements



WIU-2

Standard Depth 2-Gang

3.25" (82.6mm) Depth

Description	# Of Avail. Configurations	Color	Catalog No.
Horizontal/ Vertical Mount	60+	Gray	<input type="checkbox"/> WIU-2
Horizontal/ Vertical Mount	60+	White	<input type="checkbox"/> WIU-2W

cULus Listed to UL514D, file no. E33216, certified to CSA C22.2 no. 42; meets NEMA 3R requirements

Specification Information: Please visit www.cooperwiringdevices.com

Non-Metallic Protective Covers

Weatherproof or Protective Only
 1-Gang, Self-Closing Lids
 1-Gang, Stay Open Lids

FEATURES

- Weatherproof models are UL Listed for wet locations with cover closed.
- Weatherproof models meet 2011 NEC® 406.9 (A) and 406.9 (B)(2), except for switch cover which meets 2011 NEC® 404.5.
- Tough plastic construction resistant to high impact and sunlight.
- Non-corrosive and non-conductive.
- Gasket provided seals both device openings and edges.
- Switch cover features factory-attached to cover gasket, minimizing labor for installer.
- Red switch cover handle for easy visual location (S2983).
- Switch cover lockable in “on” or “off” position (S2983).
- “Protective only” covers not for use in wet locations (S1961/2).

Weatherproof Single Receptacle Cover

Description	Color	Catalog No.	Color	Catalog No.	
Self-Closing, Horizontal Mount	Gray	<input type="checkbox"/> S1951	White	<input type="checkbox"/> S1951W	•



S1952

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1

Weatherproof Duplex Receptacle/Combination Device Cover

Description	Color	Catalog No.	Color	Catalog No.	
2 Self-Closing Lids, Horizontal Mount	Gray	<input type="checkbox"/> S1952	White	<input type="checkbox"/> S1952W	•
Oversized, 2 Self-Closing Lids, Horizontal Mount	Gray	<input type="checkbox"/> S1954			•
1 Self-Closing Lid, Vertical Mount	Gray	<input type="checkbox"/> S2962	White	<input type="checkbox"/> S2962W	•
1 Self-Closing Lid, Horizontal Mount	Gray	<input type="checkbox"/> S3962	White	<input type="checkbox"/> S3962W	•



S1954

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1, except S1954

Weatherproof GFCI/Decorator Device Cover

Description	Color	Catalog No.	Color	Catalog No.	
1 Self-Closing Lid, Vertical Mount	Gray	<input type="checkbox"/> S2966	White	<input type="checkbox"/> S2966W	•
1 Self-Closing Lid, Horizontal Mount	Gray	<input type="checkbox"/> S3966	White	<input type="checkbox"/> S3962W	•
1 Self-Closing Lid, Horizontal Mount	Black	<input type="checkbox"/> S3966BK			•



S2962

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1, except S1954

Weatherproof Switch Cover

Description	Color	Catalog No.	
Flush Mount Cover, Vertical Mount	Gray	<input type="checkbox"/> S2983	•



S2983

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1

Protective Only, Single Receptacle or Duplex Receptacle/Combination Device Cover

Description	Color	Catalog No.	Color	Catalog No.	
Single Receptacle, Stay-Open, Horizontal Mount	Gray	<input type="checkbox"/> S1961	White	<input type="checkbox"/> S1961W	•
Duplex Receptacle/Combo, Stay-Open, Horizontal Mount	Gray	<input type="checkbox"/> S1962	White	<input type="checkbox"/> S1962W	•



S1961

cULus listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1

Specification Information: Please visit www.cooperwiringdevices.com

NAFTA Compliant: See page F-21