

# Redi-Rail™

## Redi-Rail Rung

An "I"-Beam shaped rung provides a great strength-to-weight ratio. Patented fastener hole is designed to provide maximum grip for the fastener threads.



## Redi-Rail Rung Fastener

Specially designed and finished rung fastener. Rung pullout tested to over 3000 lbs. Vibration tested for your confidence.


## Multi-Functional Pre-Punched Holes

Act as holes for splice plate hardware: allow for field cutting to any length, no field-drilling necessary. Holes also allow rungs to be repositioned. Holes allow for easy attachment of accessory items requiring 1/4" hardware (or smaller).



## Patent Information

U.S. Patent D361982; 5,580,014  
Canada 2,137,879  
UK Patent 2,285,343  
Other United States and foreign  
patents are pending.

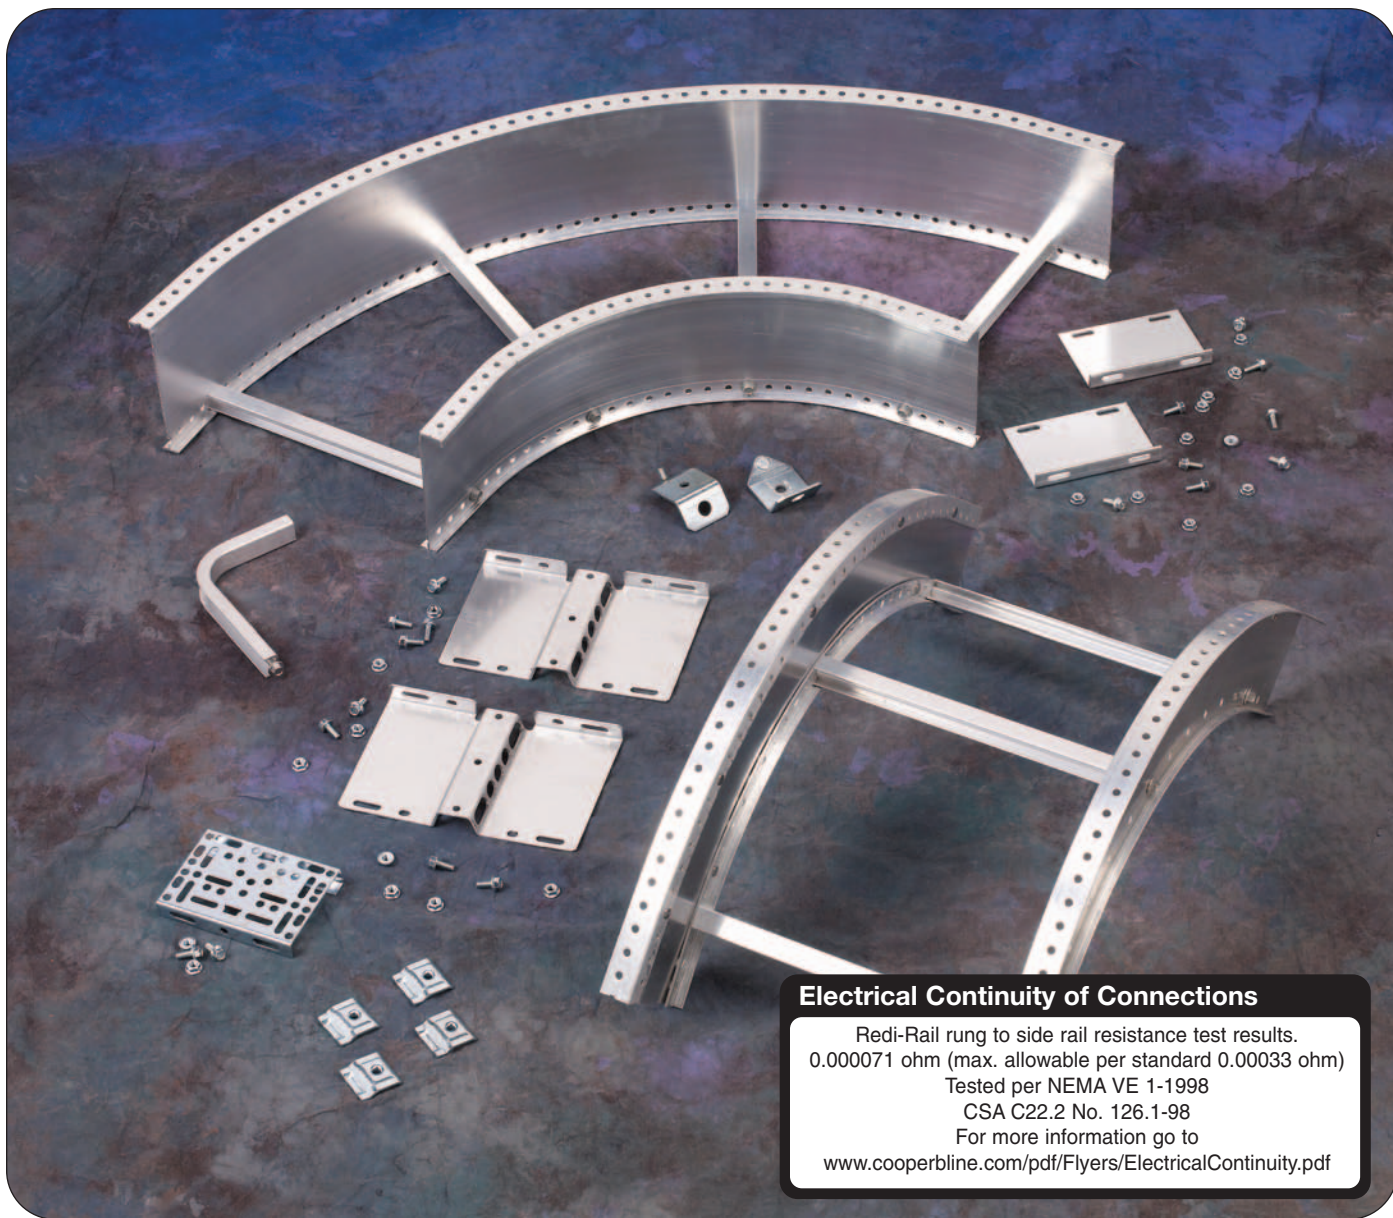

**Electrical Continuity of Connections**  
 Redi-Rail rung to side rail resistance test results.  
 0.000071 ohm (max. allowable per standard 0.00033 ohm)  
 Tested per NEMA VE 1-1998  
 CSA C22.2 No. 126.1-98  
 For more information go to  
[www.cooperbline.com/pdf/Flyers/ElectricalContinuity.pdf](http://www.cooperbline.com/pdf/Flyers/ElectricalContinuity.pdf)

### How The Service Advisor Works

B-Line knows that your time is important! That's why the color-coding system in this catalog is designed to help you select products that fit your service needs. Products are marked to indicate the typical lead time for orders of 50 pieces or less.

**Customer:** How do I select my straight sections, covers, or fittings so that I get the quickest turnaround?

**Service Advisor:** Each part of our selection chart is shown in colors. If any section of a part number is a different color, the part will typically ship with the longer lead time represented by the colors.

- Green = Fastest shipped items
- Black = Normal lead-time items
- Red = Normally long lead-time items

**Example:**                    H1    6AR    150KO   09   -   12   -   120  
    ●       ●       ●       ●       ●       ●

**Part will have a normal lead time because of the 150KO knockout type.**