ONW-D-1001-SP-W
NeoSwitch Occupancy Sensor

OCC-RJ45
(Occupancy Coupler)

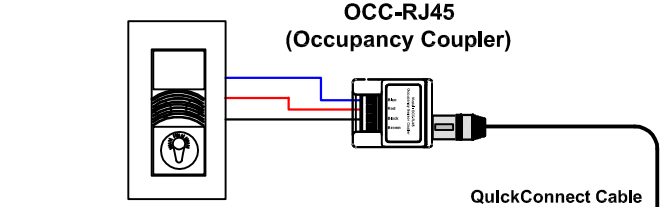

QuickConnect Cable
(Class 2)

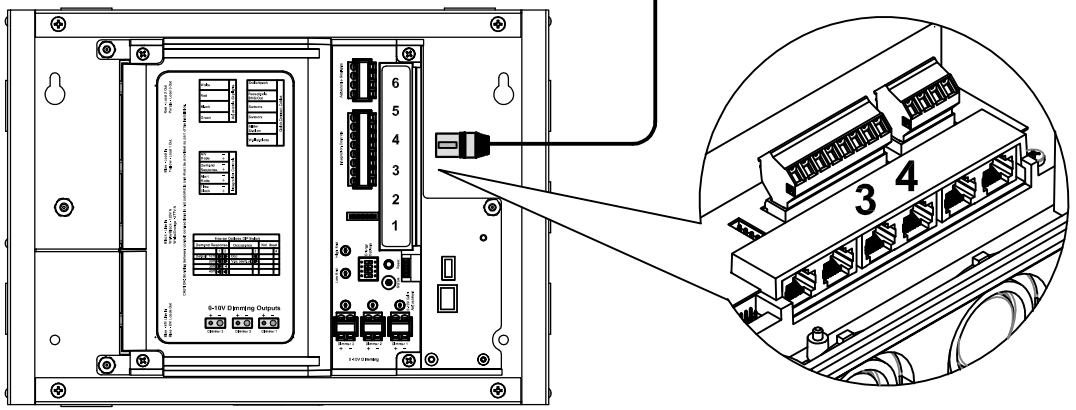

Control Sequence: A Low Voltage NeoSwitch product can be connected to the Room Controller via the OCC-RJ45 coupler. The NeoSwitch provides manual On/ Auto On/Auto Off functionality and provides standard functionality of the NeoSwitch product.
There is a 30 second delay Off when the manual push button is used.

Room Controller and Smart Devices use Click & Go technology:
The Room Controller will automtically recognize any smart device connected with the quick connect cable (provided) and start working immediately upon power up with no programming required.
The Room Controller defaults to Manual On/Automatic Off vacancy sensor mode for maximum energy savings. Wallstations buttons can toggle zones or trigger preset scenes and can be mixed within each wallstation.

ROOM CONTROLLER
WIRING DIAGRAM

TITLE: LIGHTING CONTROLS
Low Voltage NeoSwitch

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF EATON CORPORATION. IT IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED, USED, OR DISCLOSED EXCEPT FOR THE PURPOSE FOR WHICH FURNISHED.

DRAWN: M.A.L	DATE: 8/16/14	PROJ:	
CH'KD: X.X.	SCALE: NTS		
APPR: X.X.	SHEET: 1/1	DWG #:	E6
	SIZE:		

DATE	REV	DESCRIPTION	BY
		REVISION TABLE	